


Project Name:	Notes:	Date:	Type:
---------------	--------	-------	-------



DESCRIPTION

Portor's fully dimmable microwave motion sensor allows a full range of control, including standby time, hold time, daylight threshold, and sensitivity detection.

MSS-TR is a moving object sensor than can detect range of 360° and it's working frequency is 5.8 GHz, and adopts a microwave sensor (high-frequency output <0.2mW), so that it is safe and performs better than infrared sensor.

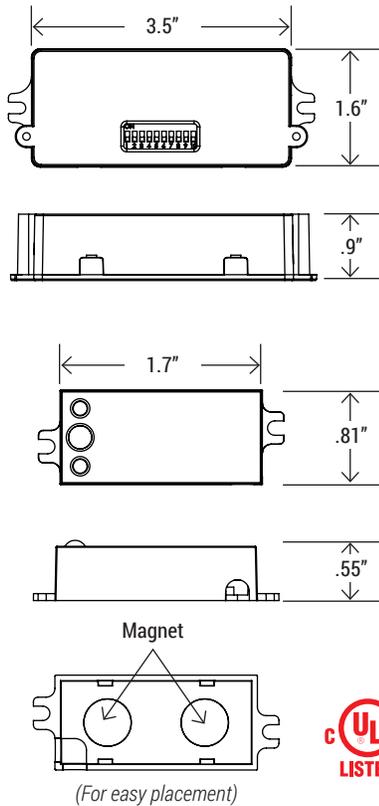


TECHNICAL SPECIFICATION

OPERATING VOLTAGE	120-277VAC, 50Hz/60Hz
MAX LOAD @-40°F~+158°F (-40°C~+70°C)	Resistive/Tungsten - 600W@120V Electronic Ballast (ED) - 800VA@120V 1200VA@277V
DIM CONTROL OUTPUT	0-10V, max. 25mA sinking current
MICROWAVE FREQUENCY	5.8GHz CW
MICROWAVE POWER	<0.2mW
MOUNTING HEIGHT	Max. 20 ft
DETECTION RADIUS	Max. 26 ft
DETECTION ANGLE	360°
HUMIDITY	Max. 95% RH
OPERATING TEMPERATURE	-40°F~+158°F (-40°C~+70°C)


NOTE

The high-frequency output of this sensor is <0.2mW, that i just one 5000th of the transmission power of a mobile phone or the output of a microwave oven.


SENSOR COVERAGE

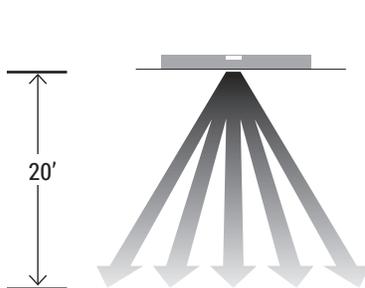

Installation Height:
Max. 20 ft

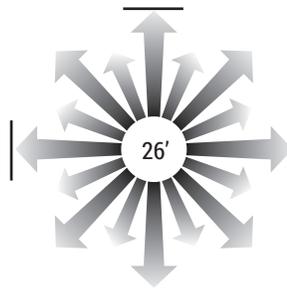

Detection Radius:
Max. 26 ft

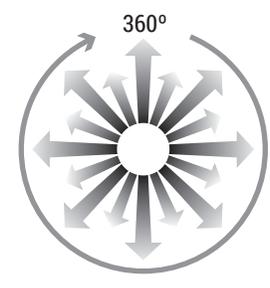

Detection Angle:
360°

Project Name:	Notes:	Date:	Type:
---------------	--------	-------	-------

FUNCTION AND OPTIONS

DAYLIGHT THRESHOLD FUNCTION

A control method based on the control of artificial light with available natural light. The purpose is to control the output of artificial light according to the change of natural light, while ensuring that the illumination of the target space does not change to maintain a certain illumination.

ON-OFF FUNCTION

Switch on the lamp on detection of movement, and switch off after a hold time when there is no motion detected. As built-in daylight sensor can read brightness value, the sensor does not switch on the lamp if with sufficient natural light.

OPERATION:

NOTE: Warm up time is 15seconds. After the sensor connects input power, the light will keep on 15seconds, then go to dimming to work normally.

NOTE: Factory Default Setting: 100% sensitivity, Hold on time: 10seconds, Daylight sensor is 30lux, Dimming level: 30%, Dimming time: 60minutes.

NOTE: Any setting changed by DIP Switch or remote control, the light that sensor connect will on/off as confirm.



The lamp will not switch on when natural light is sufficient, even there is motion detected.


The lamp switches on automatically with presence when natural light is insufficient.

The lamp turns on at full or dims to maintain the lux level. The lamp output regulates according to the level of natural light available.

The lamp dims to stand-by period after hold-time and stays on selected minimum dimming level.

The lamp switches off completely after the stand-by period.

PARAMETER SETTING BY DIP SWITCH

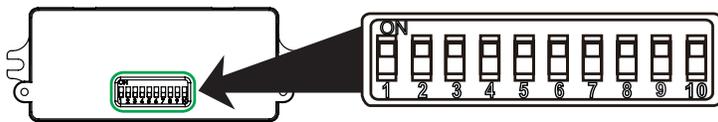


DETECTION RANGE SETTING (SENSITIVITY)

Detection rang can be reduced by selecting the combination on the DIP switches to fit precisely each application:



LIGHT-CONTROL SETTING

The chosen lamp response threshold can be infinitely from approx. 10-501 ux, switch location and light-control of the corresponding table is as follows:

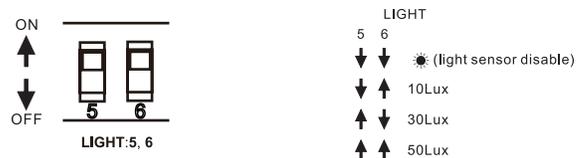

LIGHT-CONTROL SETTING

The chosen lamp response threshold can be infinitely from approx. 10-501 ux, switch location and light-control of the corresponding table is as follows:



HOLD TIME SETTING

The lamp can be set to stay ON for any period of time between approx.10sec and a maximum of 15min. Any movement detected before this time elapse will re-start the timer. It is recommended to select the shortest lime for adjusting the detection zone and for performing the walk test. Switch location and hold lime of the corresponding table is as follows:



STAND-BY TIME SETTING

File of switch location and stand-by time setting as follow:





Project Name:	Notes:	Date:	Type:
---------------	--------	-------	-------

WIRING DIAGRAMS


Wiring with dimming ballast or LED driver. Dimming Driver

Wiring with non-dimming ballast or LED driver. Non-Dimming Driver

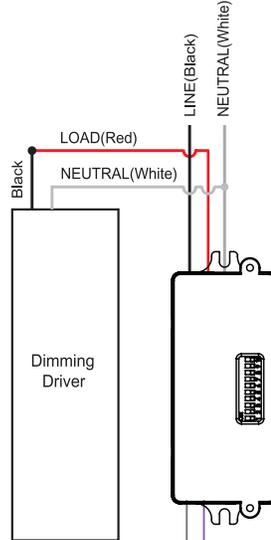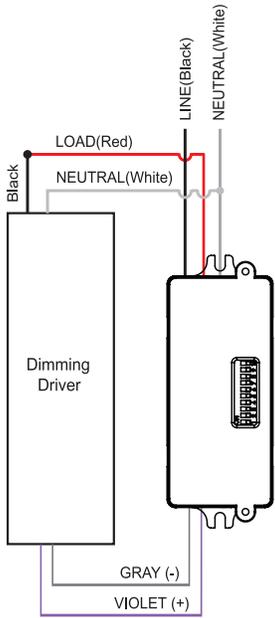

Close End Wire Connector

INSTALLATION

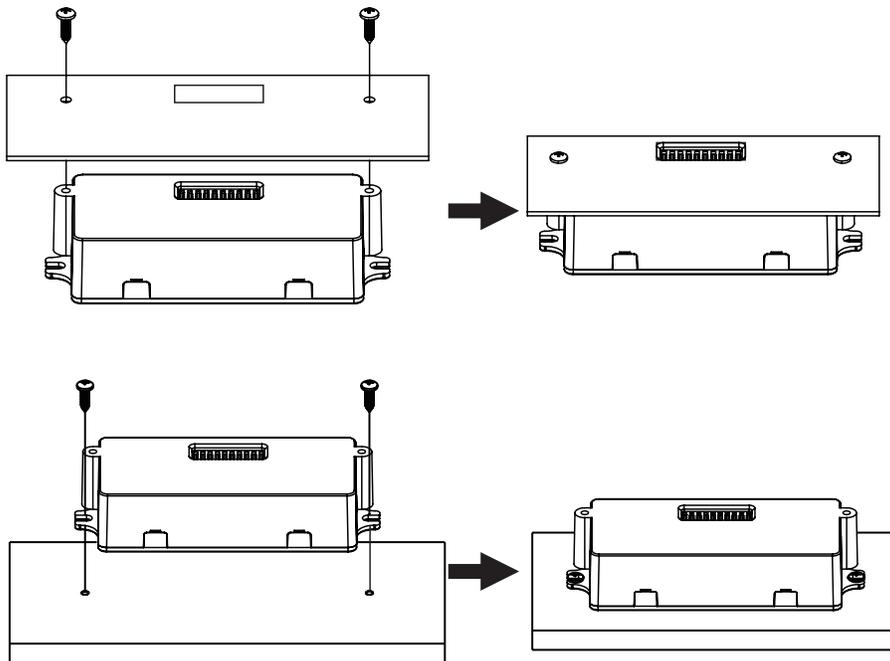

PARAMETER SETTING BY REMOTE CONTROL IN MANUAL OF RC-100



Motion Sensor Remote Control
(Needed to program motion sensor, sold separately)