

# INSTALLATION INSTRUCTIONS

## PT-WPM3 SERIES

PT-WPM3-3CP



**CCT**  
SELECTABLE  
**WATTAGE**  
SELECTOR

### READ THESE INSTRUCTIONS COMPLETELY AND CAREFULLY

#### SAFETY

THIS FIXTURE MUST BE WIRED IN ACCORDANCE WITH THE NATIONAL ELECTRICAL CODE AND APPLICABLE LOCAL CODES AND ORDINANCES. PROPER GROUNDING IS REQUIRED TO INSURE PERSONAL SAFETY. CAREFULLY OBSERVE THE GROUNDING PROCEDURE UNDER INSTALLATION SECTION. ALL WORK SHOULD BE DONE BY A QUALIFIED ELECTRICIAN.

- **RISK OF ELECTRIC SHOCK** - DISCONNECT POWER AT FUSE OR CIRCUIT BREAKER BEFORE INSTALLING OR SERVICING.
- **RISK OF PERSONAL INJURY** - FIXTURE MAY BECOME DAMAGED AND/OR UNSTABLE IF NOT INSTALLED PROPERLY. TIGHTEN ALL FIXTURE COMPONENTS TO THEIR RECOMMENDED TORQUE VALUES.

#### WARNING

- TURN OFF ELECTRICAL POWER AT FUSE OR CIRCUIT BREAKER BOX BEFORE WIRING FIXTURE TO THE POWER SUPPLY.
- TURN OFF THE POWER WHEN YOU PERFORM ANY MAINTENANCE.
- VERIFY THAT SUPPLY VOLTAGE IS CORRECT BY COMPARING IT WITH THE LUMINAIRE LABEL INFORMATION.
- ALL WIRING CONNECTIONS SHOULD BE CAPPED WITH UL APPROVED WIRE CONNECTORS.

#### CAUTION

- AVOID DIRECT EYE EXPOSURE TO THE LIGHT SOURCE WHILE IT IS ON.
- ACCOUNT FOR SMALL PARTS AND DESTROY PACKING MATERIAL, AS THESE MAY BE HAZARDOUS TO CHILDREN.
- **RISK OF BURN.** DISCONNECT POWER AND ALLOW FIXTURE TO COOL BEFORE CHANGING BULB OR HANDING FIXTURE.

### INSTALLATION (ALWAYS TURN OFF THE POWER SUPPLY FROM MAIN CIRCUIT BREAKER FIRST!)

#### Installation Option 1

1. Follow (Fig 1) & screw driver to fix the fixture by the 2xM3 screws installed on the ear holes on each side.
2. Connect the wires. (Fig 2 & 3)
3. Uncap the CCT & Power selectable modular to select desired CCT & Wattage. Cap the modular after operation is done. (Fig 6 & 7)
4. Caulk to mounting surface, at all sides.

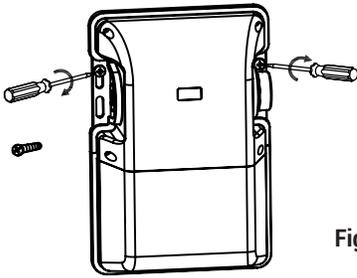


Fig 1




Fig 2


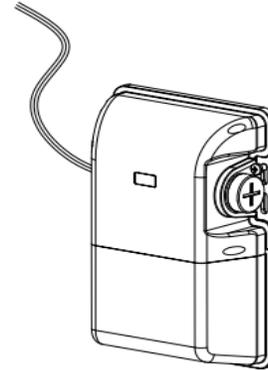


Fig 3

### Wiring Diagram

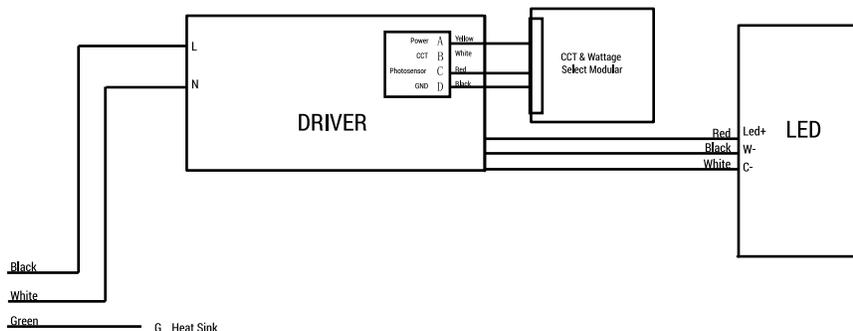

**INSTALLATION** (ALWAYS TURN OFF THE POWER SUPPLY FROM MAIN CIRCUIT BREAKER FIRST!)

### Installation Option 2

1. Follow (Fig 1) to unscrew the 4 screws to open the front face cover of the fixture.
2. Separate the front face cover from the base by disconnecting the connectors. (Fig 2)
3. Drill holes on the wall according to the hole sizes of the junction box on fixture. Fix the fixture on wall & connect the wires. (Fig 3 & 4)
4. Put back the front face cover back to fixture and screw the 4 screws. (Fig 5)
5. Uncap the CCT & Power selectable modular to select desired CCT & Wattage. Cap the modular after operation is done. (Fig 6 & 7)
6. Caulk to mounting surface, at all sides




Fig 1




Fig 2

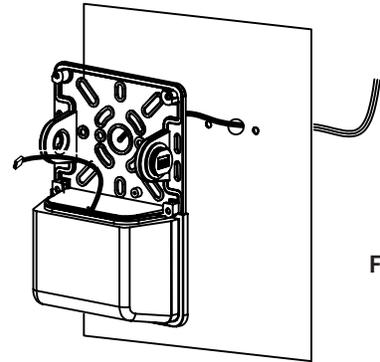


Fig 3

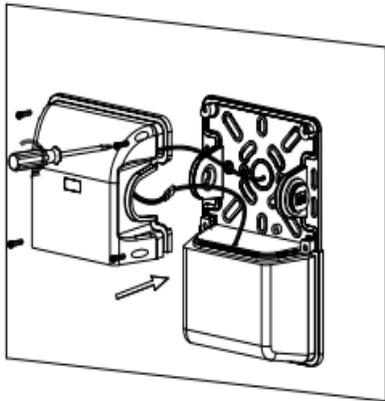


Fig 5





Fig 4


### CCT and Wattage Selector



#### Wattage Select



#### Photocell



#### CCT Select




Fig 6 & 7