

Project Name:	Notes:	Date:	Type:
---------------	--------	-------	-------

DESCRIPTION

Commercial grade recessed downlight, available in two different wattages. Each wattage has 4000K and 5000K options, and able to utilize 6", 8", or 10" aluminum trim reflectors.

Ideal use for commercial complexes, hospitality, healthcare industry, schools, shopping centers, industrial areas and hotels.



(Trim sold separately)

CONSTRUCTION

PC driver housing, aluminum reflector, MC cable and fireproof junction box.

ELECTRICAL

Luminaire is built with the highest quality 100-277VAC drivers.

ENERGY SAVINGS

50% more energy savings than halogen lamps. Low heat production requires less air-conditioning requirements.

DIMMING

0-10V dimmable

CERTIFICATION

UL Listed, FCC, RoHS, CE & Energy Star Listed

TECHNICAL SPECIFICATION

WATTAGE	40W
LUMENS	3,200 lumens
EFFICACY	80 lm/W
VOLTAGE	AC100-277V
POWER FREQUENCY	50/60 Hz
CCT	5000K
CRI	Ra>84
BEAM ANGLE	120°
WORKING TEMP.	-4°F - +113°C
STORAGE TEMP.	-4°F - +113°C
IP RATING	IP44, Suitable for damp locations
DIMMABLE	0-10V dimming
POWER FACTOR	>0.9
THD	≤20%
WARRANTY	5 year limited
PORTOR CAT#	PT-CDL-40W-5K



MODEL NUMBER(S)

MODEL#	WATTS	LUMENS	LM/WATT	CCT	CRI	VOLTAGE
CE8-40W-40E-347	40W	3,200	80	4000K	>85	AC 100/277V
CE8-40W-50E-347	40W	3,200	80	5000K	>84	AC 100/277V

Project Name:	Notes:	Date:	Type:
---------------	--------	-------	-------

AVAILABLE TRIM APERTURES



PT-CDL-40W
One driver, different trim options



PT-CDL-TRIM-6

Diameter: 7-1/2"
Height: 6-3/8"

PT-CDL-TRIM-8

Diameter: 9-1/4"
Height: 7-1/2"


PT-CDL-TRIM-10

Diameter: 11"
Height: 7"

The PT-CDL-Trim Reflector is a parabolic aluminum reflector that provides cutoff for a visually comfortable optic. Easy installation as the trim attaches to LED module with industry standard clips.

PHOTOMETRY

Fixture photometry has been conducted accredited testing laboratory in accordance with IESNA LM79-08.

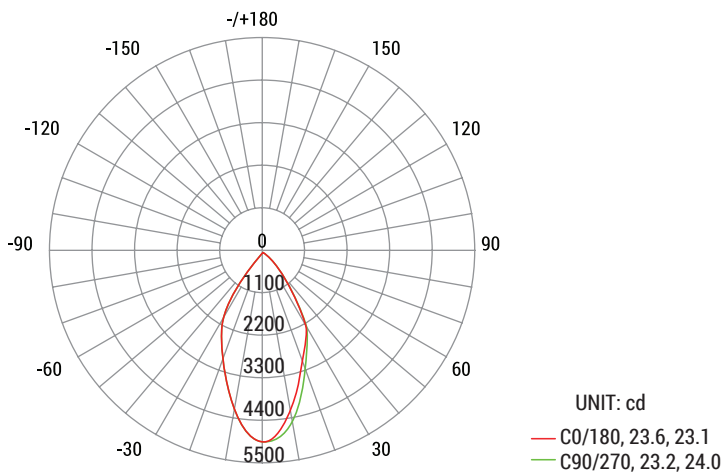

Average Beam Angle (50%) : 46.9 degree

