

# INSTALLATION INSTRUCTIONS

## SLIM WRAPAROUND

PT-WAS-4F5I-40-3CP-2

**PORTOR**  
LIGHTING  
a PORTOR INDUSTRY brand



### WARNING

- TO REDUCE THE RISK OF DEATH, PERSONAL INJURY OR PROPERTY DAMAGE FROM FIRE, ELECTRIC SHOCK, FALLING PARTS, CUTS/ABRASIONS, AND OTHER HAZARDS READ ALL WARNINGS AND INSTRUCTIONS INCLUDED WITH AND ON THE FIXTURE BOX AND ALL FIXTURE LABELS.
- BEFORE INSTALLING, SERVICING, OR PERFORMING ROUTINE MAINTENANCE UPON THIS EQUIPMENT, FOLLOW THESE GENERAL PRECAUTIONS.
- COMMERCIAL INSTALLATION, SERVICE AND MAINTENANCE OF LUMINAIRES SHOULD BE PERFORMED BY A QUALIFIED LICENSED ELECTRICIAN.
- **FOR THE INSTALLATION:** IF YOU ARE UNSURE ABOUT THE INSTALLATION OR MAINTENANCE OF THE LUMINAIRES, CONSULT A QUALIFIED LICENSED ELECTRICIAN AND CHECK YOUR LOCAL ELECTRICAL CODE.
- TO PREVENT WIRING DAMAGE OR ABRASION, DO NOT EXPOSE WIRING TO EDGES OF SHEET METAL OR OTHER SHARP OBJECTS.
- DO NOT MAKE OR ALTER ANY OPEN HOLES IN AN ENCLOSURE OF WIRING OR ELECTRICAL COMPONENTS DURING KIT INSTALLATION.

### CAUTION


- AVOID DIRECT EYE EXPOSURE TO THE LIGHT SOURCE WHILE IT IS ON.
- ACCOUNT FOR SMALL PARTS AND DESTROY PACKING MATERIAL, AS THESE MAY BE HAZARDOUS TO CHILDREN.
- **RISK OF BURN.** DISCONNECT POWER AND ALLOW FIXTURE TO COOL BEFORE CHANGING BULB OR HANDLING FIXTURE.

### WARNING

- RISK OF FIRE OR ELECTRIC SHOCK
- TURN OFF ELECTRICAL POWER AT FUSE OR CIRCUIT BREAKER BOX BEFORE WIRING FIXTURE TO THE POWER SUPPLY.
- TURN OFF THE POWER WHEN YOU PERFORM ANY MAINTENANCE.
- VERIFY THAT SUPPLY VOLTAGE IS CORRECT BY COMPARING IT WITH THE LUMINAIRE LABEL INFORMATION.
- ALL WIRING CONNECTIONS SHOULD BE CAPPED WITH UL APPROVED WIRE CONNECTORS.


## INSTALLATION (ALWAYS TURN OFF THE POWER SUPPLY FROM MAIN CIRCUIT BREAKER FIRST!)

### WIRING DIAGRAM

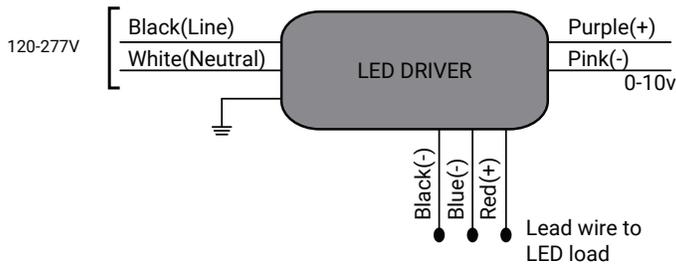

### INSTRUCTIONS FOR SELECTING CCT & LUMEN


1. Two slide switches are located on the driver enclosure: one for CCT and the other for lumen. CCT and lumen options must be selected before installation.
2. To select the CCT, slide the first switch to the desired LED color temperature (3500K, 4000K, 5000K CCT).
3. To select the lumen, slide the second switch to the desired lumen

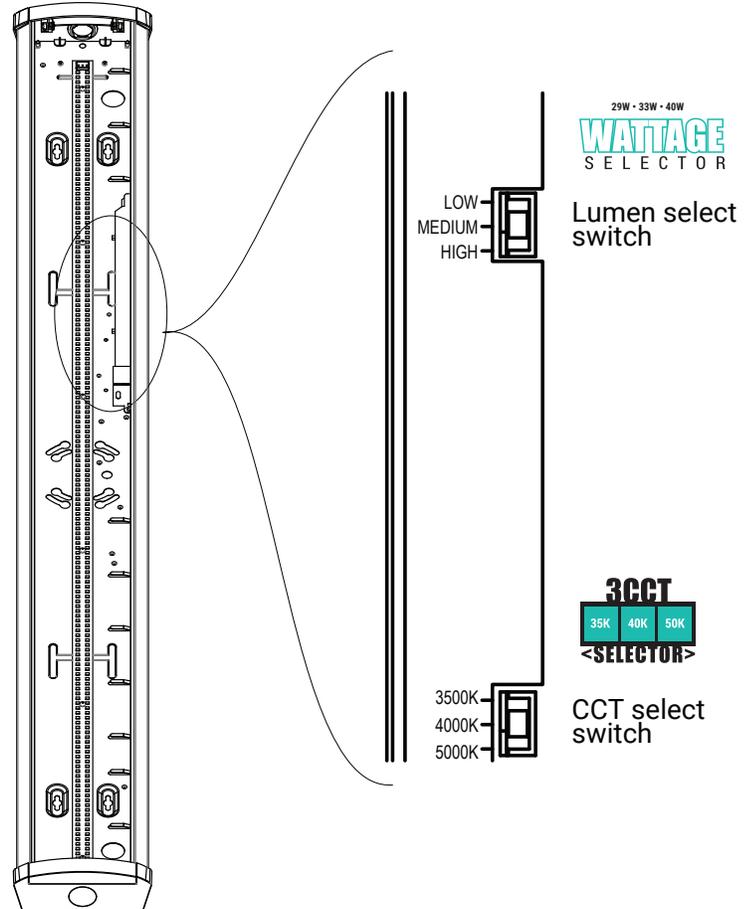

**INSTALLATION** (ALWAYS TURN OFF THE POWER SUPPLY FROM MAIN CIRCUIT BREAKER FIRST!)


### INSTALLATION INSTRUCTIONS

Fig.1

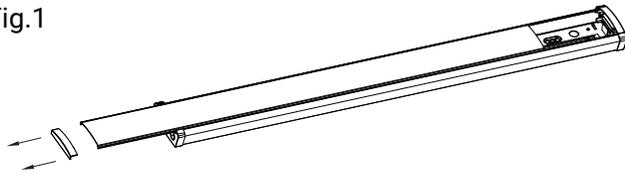


Remove the sliding cover and pull out the lampshade.

Fig.2




Install the installation screws on the J-BOX.

Fig.3

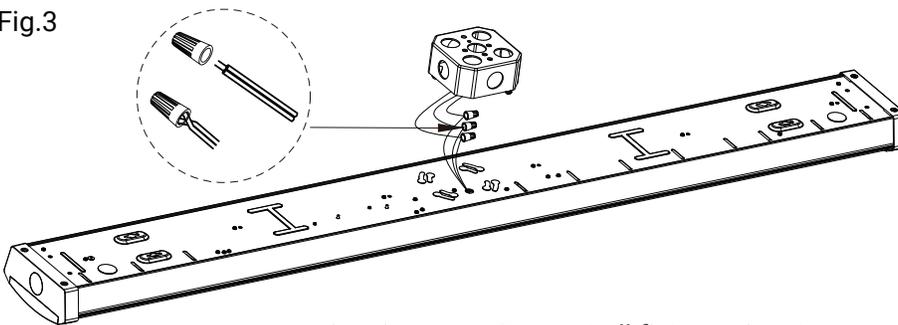


Locate wires in J-box. Connect all fixture wires to power supply wires. White to white, black to black, and green to green with wire nuts. See wiring diagram for reference.

Fig.5

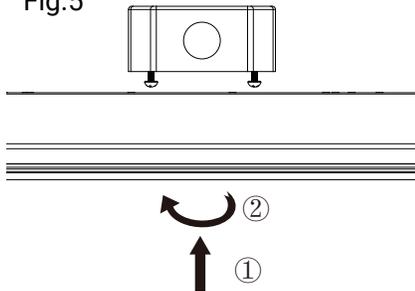


Attach the fixture to the J-BOX through the mounting holes on its bottom

Fig.6

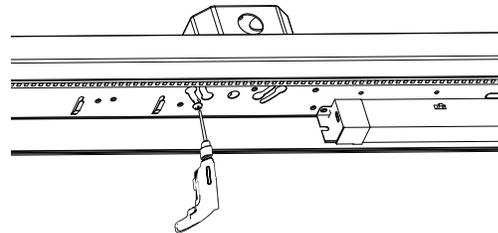

Tighten the installation screws.

Fig.7

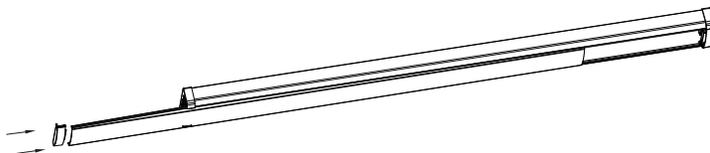

The lamp shade and sliding cover that were removed have been properly installed.

Turn breaker back on to verify light fixture turns on and lumen output to a switch, be sure to turn on switch to energize fixture. (See page 1)(brightness) and LED CCT color temperature is acceptable. If circuit is attached.