

Project Name:	Notes:	Date:	Type:
---------------	--------	-------	-------

DESCRIPTION

The LSL series is slim, lightweight, and powerful 0-10V dimmable luminaire, with surface mounting kit standard and suspension mounting optional.

Ideal use for locker rooms, aisles, walkways, garages, workshops, and warehouses.



CONSTRUCTION

Galvanized housing and frosted lens, suitable for damp locations. T-Bar mounting hole, and multiple knock-outs. Glass and mercury free.

ELECTRICAL

Luminaire is built with the highest quality 100-277VAC drivers.

OPTICAL SYSTEM

Featuring an acrylic frosted drop lens with low glare that delivers improved light disbursement. Easy to remove.

DIMMING

0-10V dimmable standard

LISTING

UL Listed, FCC, RoHS, CE, DLC qualified

TECHNICAL SPECIFICATION


WATTAGE	40W
LUMENS	5,034 lumens
EFFICACY	130 lm/W
VOLTAGE	AC100-277V
POWER FREQUENCY	50/60 Hz
CCT	4000K
CRI	Ra>80
BEAM ANGLE	120°
WORKING TEMP.	-40°F - +122°F
STORAGE TEMP.	-40°F - +158°F
IP RATING	IP44 Suitable for damp locations
DIMMABLE	0-10V dimming
POWER FACTOR	>0.9
THD	≤12%
WARRANTY	5 year limited



MODEL NUMBER(S)						
MODEL#	WATTS	LUMENS	LM/WATT	CCT	CRI	VOLTAGE
PT-LSL-40W-4K	40W	5,034	130	4000K	>80	AC 100/277V
PT-LSL-40W-5K	40W	5,286	133	5000K	>80	AC 100/277V

Project Name:	Notes:	Date:	Type:
---------------	--------	-------	-------

DIMENSION

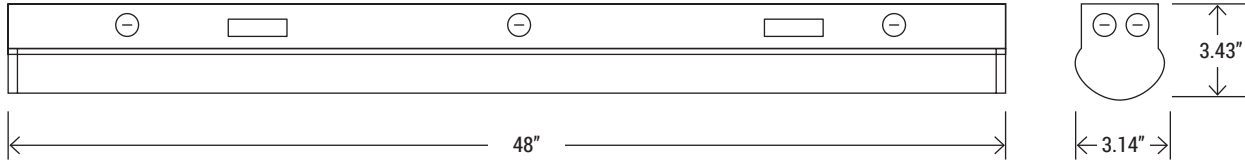

MOUNTING



Surface mount




Pendant mount

ACCESSORY



PT-LSL-A-HW
Hanging wire for strip light

PHOTOMETRY

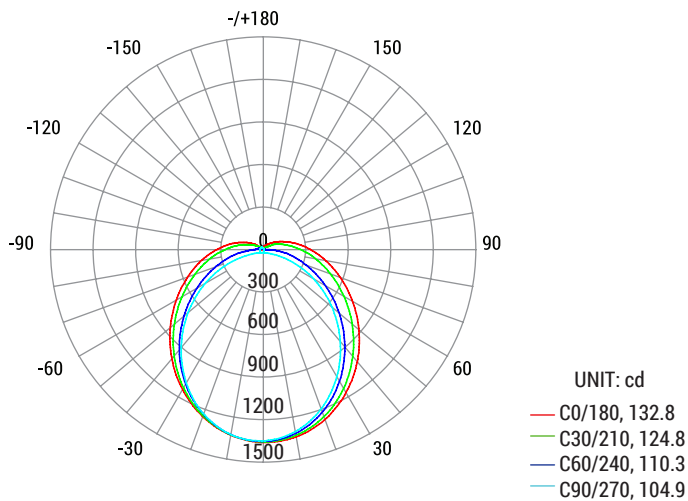

Average Beam Angle (50%) : 118.2 degree