

Project Name:	Notes:	Date:	Type:
---------------	--------	-------	-------

**DESCRIPTION**

The LSL series is slim, lightweight, and powerful 0-10V dimmable luminaire, with surface mounting kit standard and suspension mounting optional.

Ideal use for locker rooms, aisles, walkways, garages, workshops, and warehouses.



**CONSTRUCTION**

Galvanized housing and frosted lens, suitable for damp locations. T-Bar mounting hole, and multiple knock-outs. Glass and mercury free.

**ELECTRICAL**

Luminaire is built with the highest quality 100-277VAC drivers.

**OPTICAL SYSTEM**

Featuring an acrylic frosted drop lens with low glare that delivers improved light disbursement. Easy to remove.

**DIMMING**

0-10V dimmable standard

**LISTING**

UL Listed, FCC, RoHS, CE, DLC qualified

**TECHNICAL SPECIFICATION**


WATTAGE	40W
LUMENS	5,286 lumens
EFFICACY	133 lm/W
VOLTAGE	AC100-277V
POWER FREQUENCY	50/60 Hz
CCT	5000K
CRI	Ra>80
BEAM ANGLE	120°
WORKING TEMP.	-40°F - +122°F
STORAGE TEMP.	-40°F - +158°F
IP RATING	IP44 Suitable for damp locations
DIMMABLE	0-10V dimming
POWER FACTOR	>0.9
THD	≤15%
WARRANTY	5 year limited



MODEL NUMBER(S)						
MODEL#	WATTS	LUMENS	LM/WATT	CCT	CRI	VOLTAGE
PT-LSL-40W-4K	40W	5,034	130	4000K	>80	AC 100/277V
PT-LSL-40W-5K	40W	5,286	133	5000K	>80	AC 100/277V

Project Name:	Notes:	Date:	Type:
---------------	--------	-------	-------

**DIMENSION**

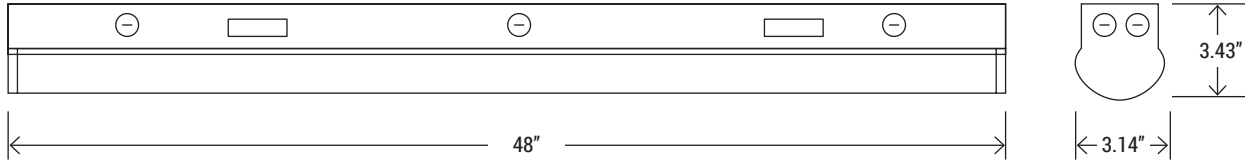

**MOUNTING**



Surface mount




Pendant mount

**ACCESSORY**



**PT-LSL-A-HW**  
Hanging wire for strip light

**PHOTOMETRY**

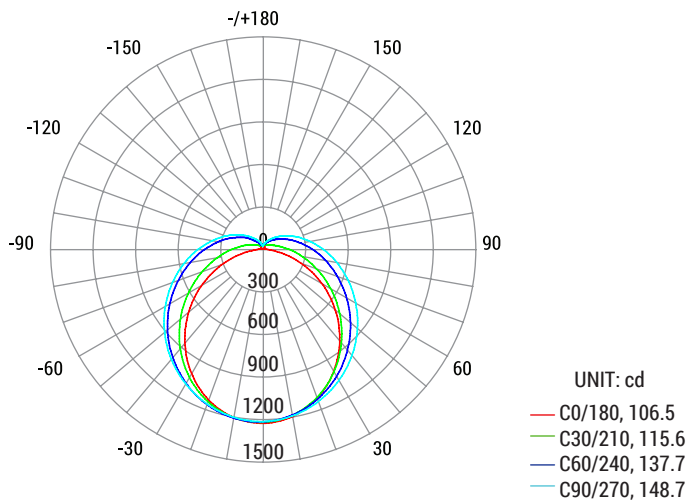

Average Beam Angle (50%) : 127.1 degree