

Project Name:	Notes:	Date:	Type:
---------------	--------	-------	-------

**DESCRIPTION**

Excellent luminaire to secure your perimeter and areas, where you need lighting most. When safety is concern, and high-lumen output is needed, Portor's exterior wall pack is the fixture for you.

Ideal use for warehouses, walkways, building entry ways, parking lots, school/campuses, shopping centers and industrial areas.



**CONSTRUCTION**

Die-cast aluminum housing. Sealed by a silicone ring that makes the fixture dust-proof and waterproof. Internal level ensures installation is horizontal.

**ELECTRICAL**

Luminaire is built with the highest quality 100-277VAC universal drivers (custom order available for 347-480VAC driver).

**OPTICAL SYSTEM**

Glass lens designed to reduce glare and improved light distribution through precision formed lens optics.

**DIMMING**

1-10V dimmable standard

**CERTIFICATION**

ETL Listed for Wet Location, FCC, RoHS, CE, IP65 Rated

**TECHNICAL SPECIFICATION**


WATTAGE	80W
LUMENS	11,653 lumens
EFFICACY	150 lm/W
VOLTAGE	AC100-277V (347-480V custom order)
POWER FREQUENCY	50/60 Hz
CCT	5000K (other CCT custom order)
CRI	Ra>80
WORKING TEMP.	-30°F - +122°F
IP RATING	IP65 Wet Location
DIMMABLE	1-10V dimming
POWER FACTOR	>0.9
THD	≤15%
WARRANTY	5 year limited
PORTOR CAT#	PT-WPH-80W-5K



MODEL NUMBER(S)						
MODEL#	WATTS	LUMENS	LM/WATT	CCT	CRI	VOLTAGE
TS-WK06G-60W-H-50K	60W	8,538	144	5000K	>80	AC 100/277V
TS-WK08G-80W-H-50K	80W	11,653	150	5000K	>80	AC 100/277V
TS-WK10G-100W-H-50K	100W	14,637	147	5000K	>80	AC 100/277V
TS-WK12G-120W-H-50K	120W	17,434	144	5000K	>80	AC 100/277V

Project Name:	Notes:	Date:	Type:
---------------	--------	-------	-------

**DIMENSION**

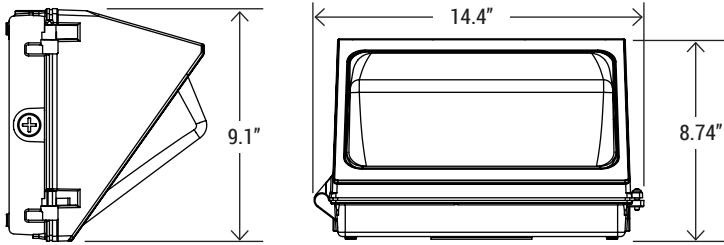

**OPTIONS**




PT-A-PSA  
Adjustable Photocell



PT-A-PSB  
Photocell

**PHOTOMETRY**

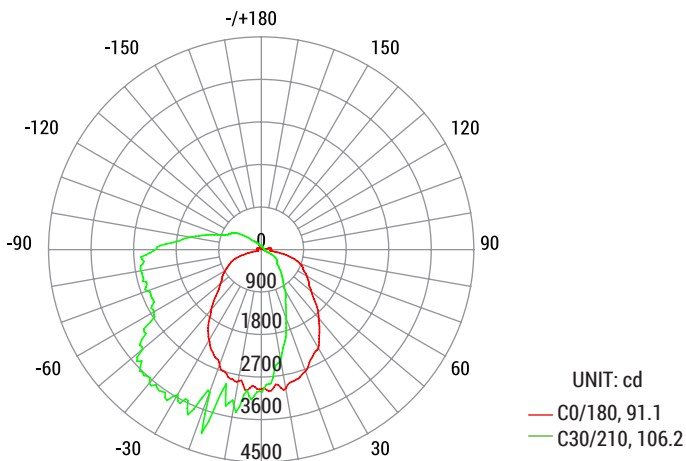

Average Beam Angle (50%) : 98.7 degree