


Project Name:	Notes:	Date:	Type:
---------------	--------	-------	-------

**DESCRIPTION**

Excellent luminaire to secure your perimeter and areas, where you need lighting most. The LED driver is mounted in direct contact with the casting to promote low operating temperature and long life.

Ideal use for warehouses, walkways, building entry ways, parking lots, school/campuses, shopping centers and industrial areas.



**CONSTRUCTION**

Die-cast aluminum housing. Sealed by a silicone ring that makes the fixture waterproof, Internal level ensures installation is horizontal.

**ELECTRICAL**

Luminaire is built with the highest quality 100-277VAC universal drivers.

**OPTICAL SYSTEM**

Robust glass lens designed to reduce glare and improved light distribution through precision formed lens optics.

**CERTIFICATION**

ETL Listed for Wet Location, FCC, RoHS, CE, IP65 Rated

**TECHNICAL SPECIFICATION**


WATTAGE	120W
LUMENS	17,534 lumens
EFFICACY	145 lm/W
VOLTAGE	AC100-277V
POWER FREQUENCY	50/60 Hz
CCT	5000K (other CCT custom order)
CRI	Ra>70
WORKING TEMP.	-30°F - +122°F
IP RATING	IP65 Wet Location
DIMMABLE	Non dimmable
POWER FACTOR	>0.95
THD	≤9%
WARRANTY	5 year limited
PORTOR CAT#	PT-WPH1-120W-5K



MODEL NUMBER(S)						
MODEL#	WATTS	LUMENS	LM/WATT	CCT	CRI	VOLTAGE
LED-1302-50W-50D	50W	6,849	136	5000K	>70	AC 100/277V
LED-1302-80W-50D	80W	11,298	145	5000K	>70	AC 100/277V
LED-1302-100W-50D	100W	14,463	140	5000K	>70	AC 100/277V
LED-1302-120W-50D	120W	17,534	145	5000K	>70	AC 100/277V
LED-1303-150W-50D	150W	20,563	145	5000K	>70	AC 100/277V

Project Name:	Notes:	Date:	Type:
---------------	--------	-------	-------

**DIMENSION**

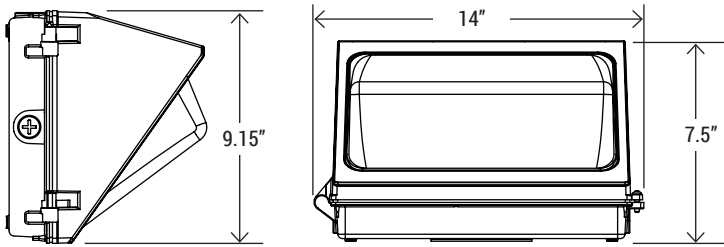

**OPTIONS**



PT-A-PSA  
Adjustable Photocell



PT-A-PSB  
Photocell




PT-A-SP  
Surge Protector




MS-WP  
Line Voltage Passive  
Infrared Outdoor Sensor

**PHOTOMETRY**

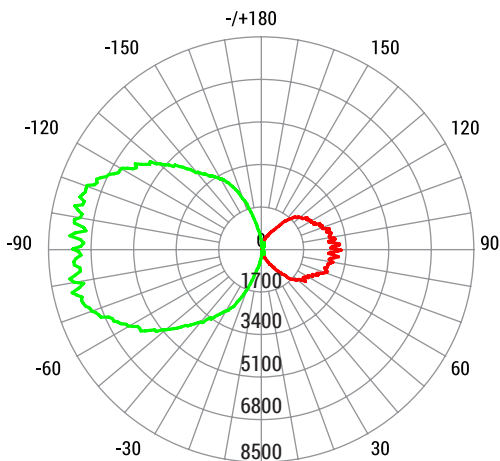

Average Beam Angle (50%) : 98.0 degree

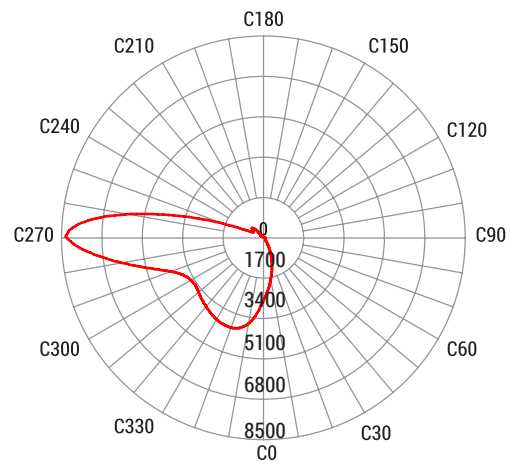

HOUSE SIDE

Max @ y = 77.0 degree

STREET SIDE