

Catalog Number:	Project Name:	Note:	Date:	Type:
-----------------	---------------	-------	-------	-------


DESCRIPTION

Portor's Closet Rated downlights with Motion Sensor are an ideal solution for closet application. Available in multiple apertures, the DMS Series features color tunable technology that lets the user choose between 2700K, 3000K, 3500K, 4000K, or 5000K.

Ideal for drop ceilings, closets, attics, hallways, bathrooms, kitchens, basements, entry ways, porches (covered ceiling only), garages, stairwells, corridors, nursing/retirement homes, condos, apartments, and any other small areas with limited space.



TUNABLE 5-1 CCT SELECTOR

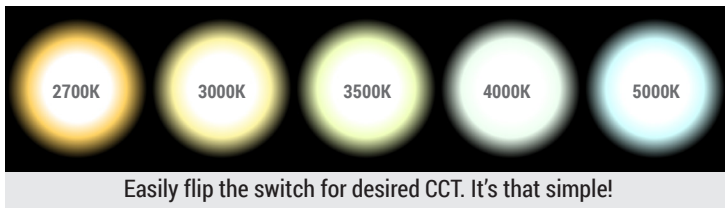

CONSTRUCTION

High quality flame retardant (V-0 grade) PC material (for 4") and high quality PC housing material with architectural white finish (for 6"). Standard gasket included to ensure proper seal. J-box installations or recessed housings (optional).

ELECTRICAL

Luminaire is built with the highest quality 120V drivers, ensuring energy efficiency.

ENERGY SAVINGS

80% more energy savings than halogen lamps. Low heat production requires less air-conditioning requirements, further increasing energy cost savings.

LISTING

ETL Listed, FCC, RoHS, CE & Energy Star Listed

TECHNICAL SPECIFICATION

WATTAGE	10W/15W
LUMENS	600/900 lumens
EFFICACY	60 lm/W
VOLTAGE	AC120V
POWER FREQUENCY	50/60 Hz
CCT	27K/30K/35K/40K/50K
BEAM ANGLE	120°
CRI	Ra>90
IP RATING	IP40, Suitable for damp locations
POWER FACTOR	>0.9
LIFESPAN	50,000 hrs (Based on 3 hrs/day)
WARRANTY	5 year limited



MODEL#	WATTS	DELIVERED LUMENS	LM/WATT	CCT	CRI	VOLTAGE
PT-DMS-4I-10W-5CCT	10W	600*	60	2700K/3000K/3500K/4000K/5000K	90	120V
PT-DMS-6I-15W-5CCT	15W	900*	60			

*Default @ 4000K

Catalog Number:	Project Name:	Note:	Date:	Type:
-----------------	---------------	-------	-------	-------

PASSIVE INFRARED (PIR)
MOTION SENSOR

TUNABLE
5CCT
SELECTABLE
27K • 30K • 35K • 40K • 50K


Easily flip the switch for desired CCT



PIR MOTION SENSOR

Turn on when detecting movement, not only in dark, but also daytime. Turn off after 30 seconds (customized is also available) delay if no more motion.

DIMENSION

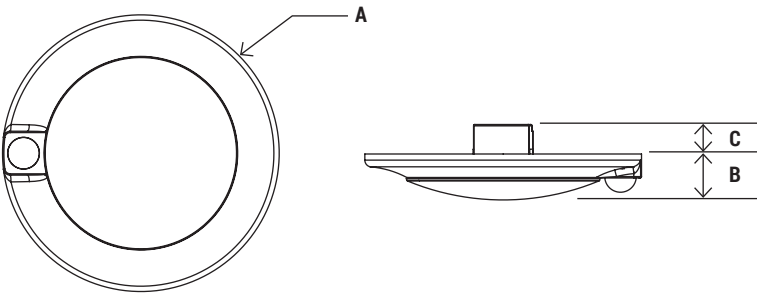


MODEL#	A	B	C
PT-DMS-4I-10W-5CCT	6.875"	1.1"	.7"
PT-DMS-6I-15W-5CCT	8"	1.375"	.7"

- Fits most J-box and recessed housings (optional)
- Sealing gasket standard

MOUNTING OPTION

The junction boxes listed below are meant to be a reference list only. Junction box sizes may vary. It is the responsibility of the individual performing the installation to confirm that the fixture can properly and safely work with any junction box.

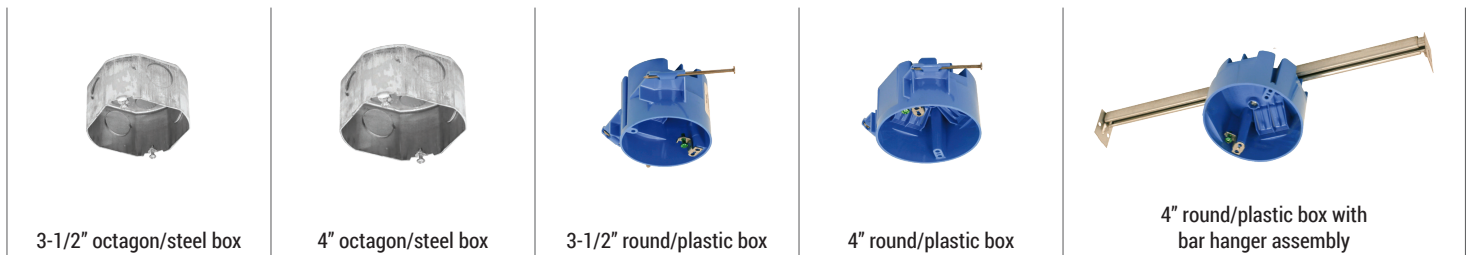

(For through circuit wiring applications, recommended j-box size is 2-1/8" deep)


Catalog Number:	Project Name:	Note:	Date:	Type:
-----------------	---------------	-------	-------	-------

PHOTOMETRICS


For complete IES files, please visit our website.

PT-DMS-4I	Wattage: 10W	Delivered lumens: 600	Efficacy: 67 lm/W	CCT: 4000K	CRI: 90
------------------	---------------------	------------------------------	--------------------------	-------------------	----------------


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

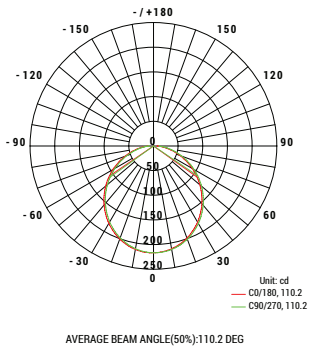

CO PLANE ISOLUX DIAGRAM (UNIT:lx)

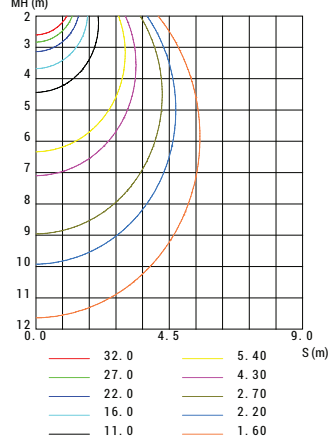


Flux out: 439.5 lm

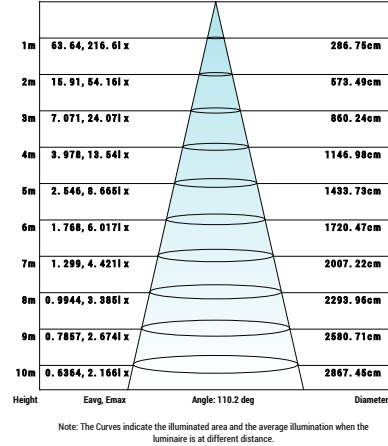


PT-DMS-6I	Wattage: 15W	Delivered lumens: 900	Efficacy: 60 lm/W	CCT: 4000K	CRI: 90
------------------	---------------------	------------------------------	--------------------------	-------------------	----------------

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

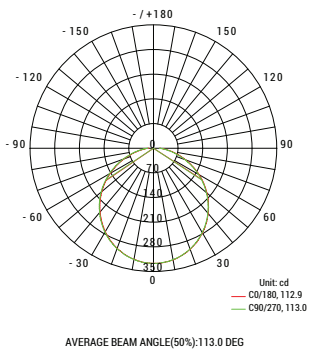

CO PLANE ISOLUX DIAGRAM (UNIT:lx)

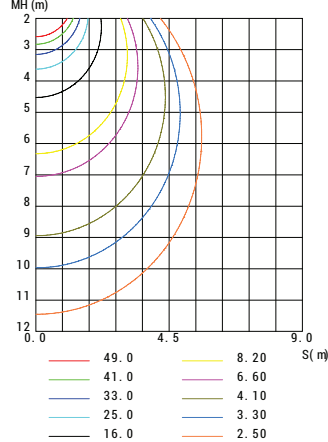

Flux out: 692.8 lm

