


Project Name:	Notes:	Date:	Type:
---------------	--------	-------	-------

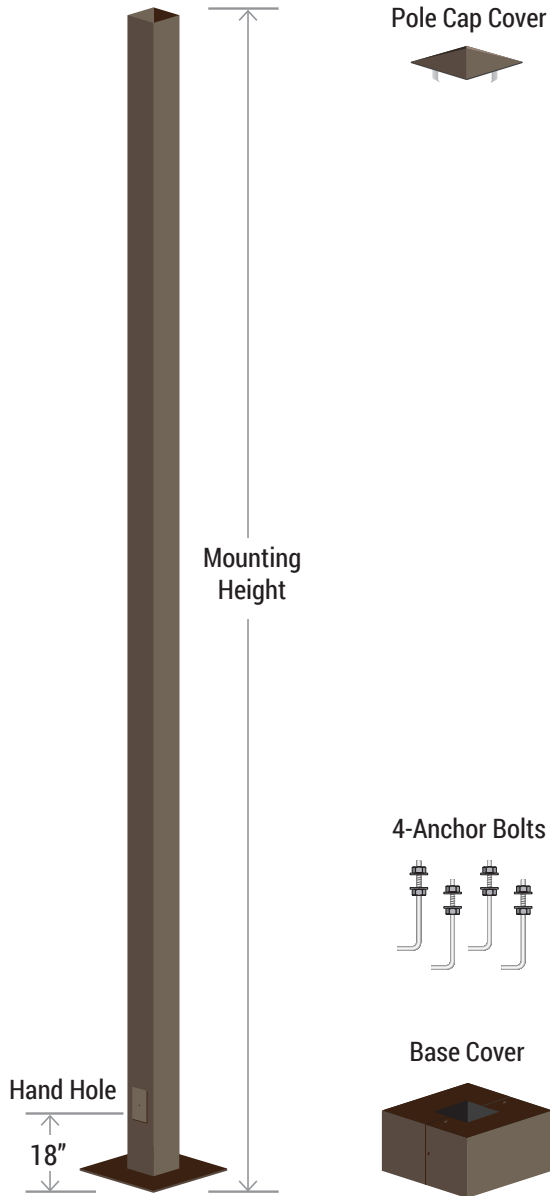

SQUARE

STEEL STRAIGHT POLE

POLE TOP OPTIONS

A removable plastic pole cap is provided if the pole is drilled for attaching light fixtures. The drill pattern and drill orientation needs to be provided by the customer unless energy light fixtures are used for the project. If a tenon option is selected, a steel tenon will be provided. A 2-3/8" diameter tenon with a 4" length is standard; however, the customer needs to confirm the appropriate tenon size required for the project.

POLE SHAFT

Commercial quality welded steel tubing of 1 piece construction with a minimum yield strength of 55,000 psi is used to fabricate the pole shaft.

HAND HOLE

3"X5" inches tall reinforced hand hole is provided at 18 inches from the base. A cover with a single screw to secure the latch mechanism is also provided.


BASE COVER

2-piece metal base cover is provided along with hardware to securely attach the two pieces together after pole installation.

ANCHOR BOLTS

A set of 4 galvanized steel anchor bolts is provided with each pole assembly. Each bolt includes 2 nuts and 2 washers. A portion of the anchor bolt is threaded for securing and leveling the pole with the provided nuts and washers. An actual size paper anchor bolt template is included.

AVAILABLE COLORS

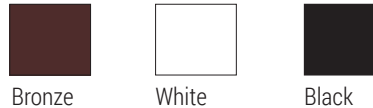

For desired finish color, please inquire for price and availability.


ORDERING SAMPLE: - - - - -

Series	Shape	Diameter	Mounting Height	Gauge	Finish
PT-SSP Straight Steel Pole with Anchor Base	S (Square)	4I (4" x 4")	10FT (10-footer) 15FT (15-footer) 20FT (20-footer) 25FT (25-footer) *CC (Custom Cut)	11 (11 ga)	BZ (Bronze) WH (White) BK (Black)

**For custom cut, please specify actual length.*

Project Name:	Notes:	Date:	Type:
---------------	--------	-------	-------

DIMENSIONAL INFORMATION



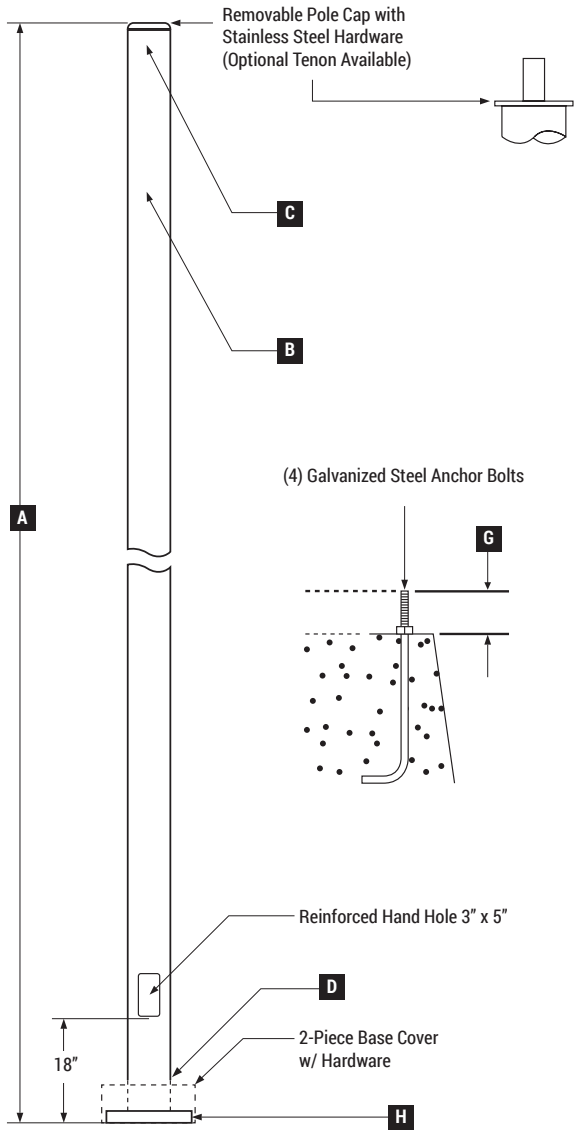


SPECIFICATION TABLE

LEGEND	DIMENSION	DESCRIPTION
A	10' - 25'	Mounting Height (ft.)
B	11 ga	Gauge
C	4"	Top Width (in.)
D	4"	Bottom Width (in.)
E	10.5"	Base Width (in.)
F	9.5"	Bolt Circle (in.)
G	3.75"	Bolt Projection (in.)
H	.75"	Base Thickness (in.)
I	.75" x 17" x 3"	Anchor Bolt Size (in.)
-	8" - 11"	Bolt Circle Range (in.)

POLES WEIGHT (LBS)

LENGTH	WEIGHT
10'	79 lbs
15'	113 lbs
20'	138 lbs
25'	240 lbs

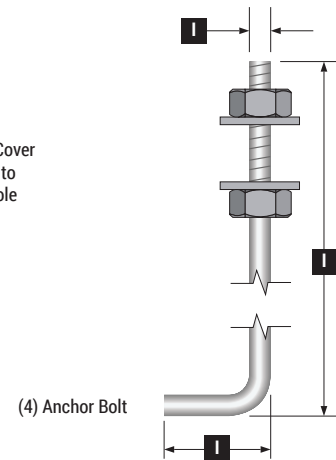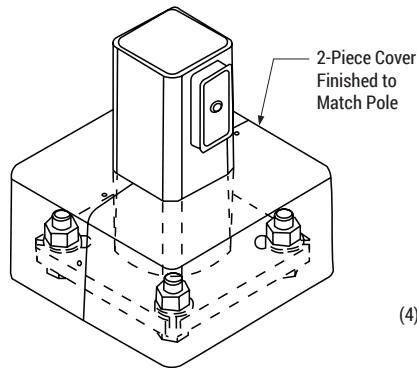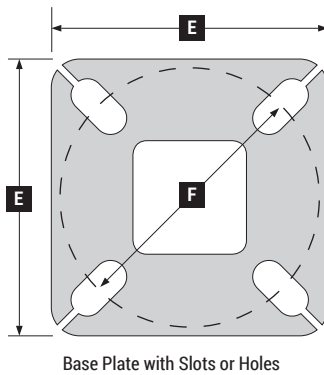

EPA LOAD INFORMATION

BASE MODEL	MOUNTING HEIGHT	80 MPH W/ 1.3 GUST		90 MPH W/ 1.3 GUST		100 MPH W/ 1.3 GUST		110 MPH W/ 1.3 GUST	
		Max. EPA (SQ FT)	Max. Weight (LBS)	Max. EPA (SQ FT)	Max. Weight (LBS)	Max. EPA (SQ FT)	Max. Weight (LBS)	Max. EPA (SQ FT)	Max. Weight (LBS)
PT-SSP-S-4I	10FT	30.6	765	20.0	500	16.0	400	13.0	325
	12FT	24.4	610	16.0	400	13.0	325	10.0	250
	14FT	19.9	498	13.5	338	10.0	250	7.5	188
	15FT	15.9	398	10.5	263	7.5	188	5.5	138
	16FT	15.9	398	10.5	263	7.5	188	5.5	138
	18FT	12.6	315	8.0	200	5.5	138	4.0	100
	20FT	9.6	240	6.0	150	4.0	100	2.5	63
	25FT	4.8	150	2.6	100	1	50	-	-