

Catalog Number:	Project Name:	Note:	Date:	Type:
-----------------	---------------	-------	-------	-------

The PT-EXL-2-RED Series is a exit light featuring 90 minutes of up time during outage, is universally mountable, field adjustable for single or dual face, and complies with UL924, UL damp location, NFPA 101, NEC/OSHA, Title 20 and adheres to the majority of state and local codes for indoor exit and emergency lighting solutions.

Ideal use for commercial buildings, industrial facilities, entryways, stairways, and hallways.



**CONSTRUCTION**

Market standard mold consisting of thermoplastic ABS housing with UL 94V-0 flame rating. Field adjustable for single or dual face in red or green color inserts. Internal switch for selection of bi-color red/green LEDs.

**ELECTRICAL**

Dual voltage operation with 120V/277VAC and input watt of 1.0W. Includes built-in 1.2V1000mAh nickel cadmium battery with a 90-minute runtime and 24 hour charge time.

**MOUNTING**

The universal J-Box mounting pattern supports quick installation time. Mount directly on a wall or to a ceiling.

**ENERGY SAVINGS**

LED emergency lights may reduce energy consumption up to 85% and lower overall maintenance costs.

**LISTING**

UL Listed, RoHS


**WARRANTY**

5 year limited warranty on electrical parts and housing. 3 year limited warranty on battery.

**TECHNICAL SPECIFICATION**

INPUT WATT	1.6W
VOLTAGE	Dual Voltage 120V-277V
BATTERY TYPE	1.2V1000mAh Nickel Cadmium
EM RUN TIME	90 mins
CHARGING TIME	24 hrs
WORKING TEMPERATURE	32°F ~ 104°F
IP RATING	Indoor Damp Location

**DIMENSION**

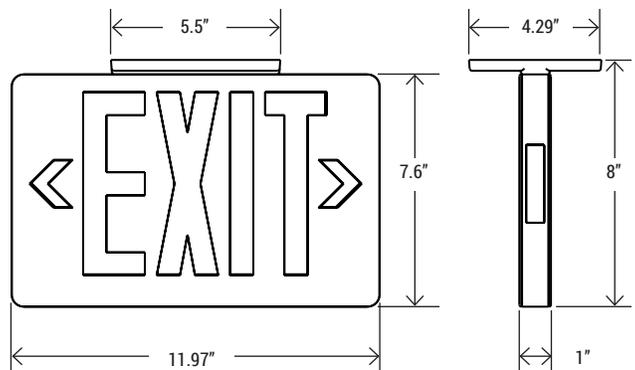

**ORDERING SAMPLE: PT-EXL-2-RED**

Series	No. of Face	Letter Color	Finish	Mounting
PT-EXL Exit Sign	2 (2-faced)	Red	White	Universal mounting (Ceiling, Side)