


Project Name:	Notes:	Date:	Type:
---------------	--------	-------	-------

No can or housing needed! Install directly into ceilings with 2" clearance. Portor's slim round profile residential downlights are taking the market by storm! Available in 6" and featuring color tunable technology that lets the user choose between 2700K, 3000K, 3500K, 4000K, or 5000K.

Ideal for soffits, drop ceilings, closets, attics, hallways, bathrooms, kitchens, basements, entry ways, porches (covered ceiling only), garages, stairwells, corridors, nursing/retirement homes, condos, elevators, apartments, and any other small areas with limited space.



**TUNABLE 5-1 CCT SELECTOR**

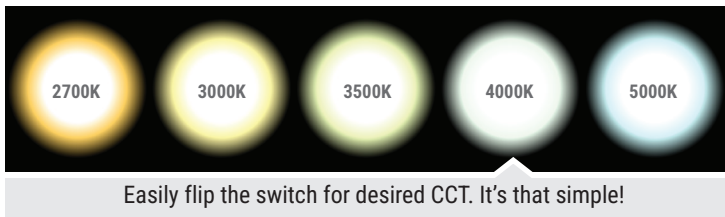

**FEATURES**

- Edge-lit technology, with no glare or dark spots
- Instant-on
- Ultra slim design, 1" thickness
- Integrated LED fixtures
- LED technology fits anywhere you need general light source
- IC rated for direct contact with insulation
- Perfect solution where joists or duct work would normally prevent recessed installation
- Damp location rated for soffit applications
- Install J-Box in ceiling beam, and insert light right into drywall opening

**DIMMING**

Triac dimmable down to 100%-10%.  
Compatible with most major brands of dimmers.

**LISTING**

ETL Listed, FCC, RoHS, CE & Energy Star Listed

WATTAGE	DELIVERED LUMENS	EFFICACY
15W	975 @ 2700K	65 lm/W
	1050 @ 3000K	70 lm/W
	1125 @ 3500K	75 lm/W
	1200 @ 4000K	80 lm/W
	1125 @ 5000K	75 lm/W

**TECHNICAL SPECIFICATION**

WATTAGE	15W
VOLTAGE	120V
POWER FREQUENCY	50/60 Hz
CCT	<b>2700K/3000K/3500K/4000K/5000K</b>
CRI	90
BEAM ANGLE	120°
RATING	Suitable for damp locations
DIMMABLE	Triac dimming
POWER FACTOR	>0.9
WARRANTY	5 year limited




**MODEL NUMBER(S)**

MODEL#	WATTS	LUMENS	LM/WATT	CCT	CRI	VOLTAGE
<b>PT-DLS2-R-6I-15W-5CCT</b>	15W	1200 (at 4000K)	88	2700K/3000K/3500K/ 4000K/5000K	90	120V
<b>PT-DLS2-R-6I-15W-5CCT-BK</b>	15W	1200 (at 4000K)	88	2700K/3000K/3500K/ 4000K/5000K	90	120V

Project Name:	Notes:	Date:	Type:
---------------	--------	-------	-------




**DIMENSION**

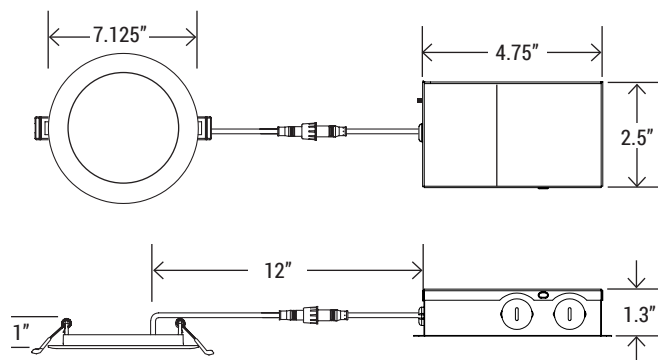

(Cut-out: 6.25")

**MOUNTING OPTIONS**



**UNI-DLS**  
4"/6" Universal Slim LED  
Housing for New Construction



**RP-DLS-6I**  
6" Slim LED Rough plate

**COMPATIBLE DIMMERS**

LUTRON*	LEVITON*	LEGRAND
<ul style="list-style-type: none"> <li>• CT-600P</li> <li>• DVLC-153P</li> <li>• MSCL-OP153M</li> <li>• PD-6WCL</li> <li>• MACL-153M/MA-R</li> <li>• TG-600PR-WH</li> <li>• S-600PR-WH</li> <li>• CTCL-153PDH-WH</li> <li>• TGCL-153PH-LA</li> <li>• SLV-600P-AL</li> <li>• DV-600PR-WH</li> <li>• SCL-153PH-WH</li> </ul>	<ul style="list-style-type: none"> <li>• RNL06</li> <li>• 6672</li> <li>• 6674</li> <li>• IPL06</li> <li>• DLS06</li> <li>• SELV-300P-WH</li> <li>• VP106-1LZ</li> </ul>	<ul style="list-style-type: none"> <li>• ADTP70TU</li> </ul>

\*For more details, please visit company's website