
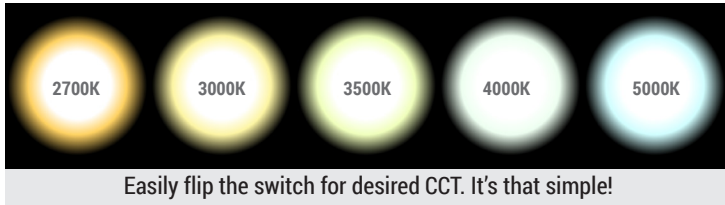


Catalog Number:	Project Name:	Note:	Date:	Type:
-----------------	---------------	-------	-------	-------

With CCT selector technology, and 60° tilting/360° rotating capability, Portor's second generation 6" gimbal retrofit kit downlights make accent, spot lighting, and wall washing so easy!

Gimbal downlights are ideal for both commercial and residential lighting, and are optimal for sloped ceilings, wall washing and general purpose lighting.

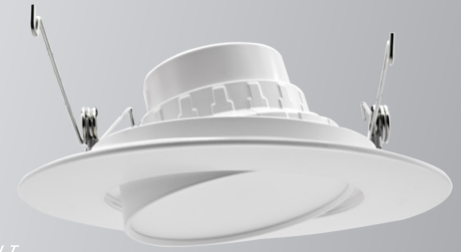

NOMINAL WATTAGE	DELIVERED LUMENS	EFFICACY
16W	1018 LM @ 2700K	up to 74 lm/W
	1070 LM @ 3000K	
	1168 LM @ 3500K	
	1193 LM @ 4000K	
	1077 LM @ 5000K	

*Actual lumens may vary.*

**CONSTRUCTION**

Aluminum die-cast body and trim with architectural white finish. Designed for new construction, remodel or retrofit. Standard gasket included to ensure proper seal.

**ELECTRICAL**

Luminaire is built with the highest quality 120V drivers, ensuring energy efficiency.

**ENERGY SAVINGS**

80% more energy savings than fluorescent lamps. Low heat production requires less air-conditioning requirements, further increasing energy cost savings.

**DIMMING**

100%-10% dimming capability, this fixture is compatible with industry standard TRIAC/ELV dimmers.

**LISTING**

Energy Star Listed , ETL Listed, RoHS

**TECHNICAL SPECIFICATION**

VOLTAGE	120V, 50/60Hz
CRI	90
CCT	2700K   3000K   3500K   4000K   5000K
BEAM ANGLE	100°
IP RATING	Suitable for damp locations
DIMMABLE	Triac dimming
POWER FACTOR	>0.9
OPERATING TEMP.	14°F ~ 104°F (-10°C ~ 50°C)
LIFESPAN	50,000 hrs (Based on 3 hrs/day)
WARRANTY	5 year limited



**ORDERING SAMPLE: PT-DLR-G-6I-16W-5CCT**



Series	Watts	Lumens	Lms/Watt	CCT	CRI	Voltage
PT-DLR-G-6I-16W-5CCT	16W	1193 @4000K	up to 74	2700K/3000K/3500K/4000K/5000K	90	120V

Catalog Number:	Project Name:	Note:	Date:	Type:
-----------------	---------------	-------	-------	-------

QTY/CARTON

**24**

PIECES

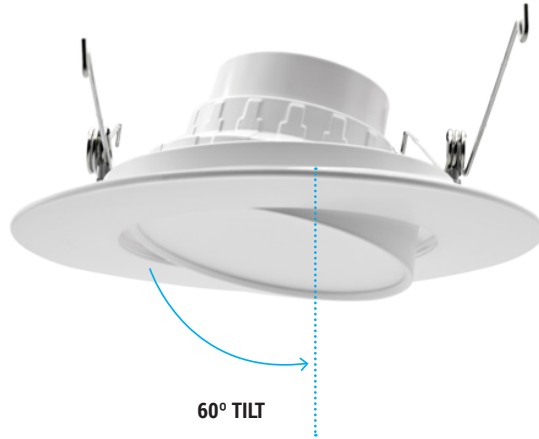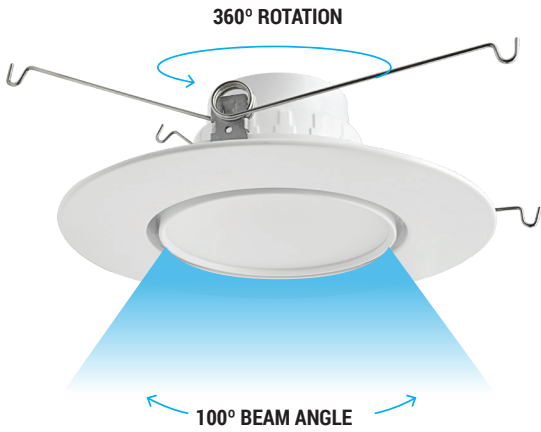

**E26 Adapter**  
(Included)

**DIMENSION**

