

| | | | | |
|-----------------|---------------|-------|-------|-------|
| Catalog Number: | Project Name: | Note: | Date: | Type: |
|-----------------|---------------|-------|-------|-------|

Portor's PT-WPH3 series combines economical and security solution for outdoor perimeter and building facades. WPH3 is wattage and color selectable, and can be programmed with a CCT of 4000K, 4500K or 5000K, eliminating the need to stock multiple color temperatures.

Ideal use for warehouses, walkways, building entry ways, parking lots, retail exteriors and shopping malls.



CONSTRUCTION

Hard-plastic material housing. Sealed by a silicone ring that makes the fixture waterproof, internal level ensures installation is horizontal.

ELECTRICAL

Luminaire is built with the highest quality driver that is Universal Voltage (120V-277V), uses long lasting, high-efficient LED packages.

OPTICAL SYSTEM

Borosilicate glass lens designed to reduce glare and improve over-all light distribution through precision formed LED optics.

ENERGY SAVINGS

Over 50% energy savings than traditionally fluorescent fixtures, low heat productions requires less maintenance and operation cost.

LISTING

UL Listed, DLC Premium Listed

WARRANTY

5 year Limited Warranty, Rated for 50,000 hours.
See Warranty documentation for details.

| PART # | WATTAGE | DELIVERED LUMENS | EFFICACY |
|-------------------|---------|------------------|----------|
| PT-WPH3-LW | 45W | 6176 | 134 lm/W |
| | 60W | 8256 | 131 lm/W |
| | 75W | 9466 | 127 lm/W |
| PT-WPH3-HW | 80W | 9083 | 128 lm/W |
| | 100W | 11638 | 126 lm/W |
| | 120W | 13741 | 120 lm/W |

Based on actual wattage setting @ 4000K. Actual lumens may vary.

TECHNICAL SPECIFICATION

| | |
|---------------------|-------------------|
| CCT | 4000K/4500K/5000K |
| CRI | 82 |
| DIMMABLE | 0-10V Dimming |
| VOLTAGE | 120V-277V |
| POWER FREQUENCY | 50/60 Hz |
| POWER FACTOR | >0.9 |
| THD | ≤20% |
| WORKING TEMPERATURE | -40°F ~ 113°F |
| IP RATING | IP65 Wet Location |
| WARRANTY | 5 year limited |





ORDERING SAMPLE: - - - - -

| Series | Wattage | CCT | Finish | Accessories/Options | | |
|--|------------------------------|-----------------------------------|------------------|---------------------|----------------------------|-----------------------|
| PT-WPH3 Commercial Grade Wall Pack Luminaire | LW (45W/60W/75W) | 3CP (4000K/4500K/5000K) | blank (Bronze) | Photocell | Motion Sensor | EM Battery |
| | HW (80W/100W/120W) | | W (White) | blank P (Photocell) | blank MS-WP3 MSS-RC-100 | blank EM (EM battery) |

| | | | | |
|-----------------|---------------|-------|-------|-------|
| Catalog Number: | Project Name: | Note: | Date: | Type: |
|-----------------|---------------|-------|-------|-------|

DIMENSION

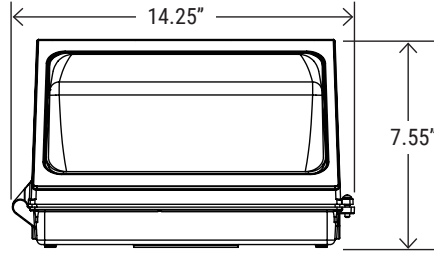

PHOTOCELL OPTION



PSA
Adjustable Photocell



PSB
Photocell

MOTION SENSOR OPTION



MS-WP3
Microwave Motion
Sensor (100V-277V)



MSS-RC-100
Remote Control

EM BATTERY



EM
LED Emergency Driver



DLC LISTING

| CATALOG NUMBER | WATTAGE | DELIVERED LUMENS | EFFICACY | DLC PRODUCT ID | CLASSIFICATION |
|----------------|---------|------------------|----------|----------------|----------------|
| PT-WPH3-LW-3CP | 75W | 9,466 @ 4000K | 135 lm/W | S-9VT70A | PREMIUM |
| PT-WPH3-HW-3CP | 120W | 13,741 @ 4000K | 135 lm/W | S-PUQ9GV | PREMIUM |

Based on actual wattage setting @ 4000K. Actual lumens may vary.