

Catalog Number:	Project Name:	Note:	Date:	Type:
-----------------	---------------	-------	-------	-------

The PT-EML-R Series is a dual head LED fixture with a minimum up time of 90 minutes during outages. The dual head LEDs are adjustable to optimize lighting direction in difficult applications. This fixture is universally mountable with a j-box style for ease of install and complies with UL924, UL damp location, NFPA 101, NEC/OSHA, Title 20 and adheres to the majority of state and local codes for indoor exit and emergency lighting solutions.

Ideal use for commercial buildings, industrial facilities, entryways, stairways, and hallways.



**CONSTRUCTION**

Market standard mold consisting of thermoplastic ABS housing with UL 94V-0 flame rating. Ultra bright LED lamp heads for emergency mode.

**ELECTRICAL**

Dual voltage operation with 120V/277VAC and input watt of 1.2W Includes built-in 3.6V1000mAh Ni-MH battery with a 90 minute runtime and 24 hour charge time.

**MOUNTING**

The universal J-Box mounting pattern is suitable for ceiling or wall mount applications.

**ENERGY SAVINGS**

LED emergency lights may reduce energy consumption up to 85% and lower overall maintenance costs.

**LISTING**

UL Listed, RoHS,


**WARRANTY**

5 year limited warranty on electrical parts and housing.  
3 year limited warranty for battery.

**TECHNICAL SPECIFICATION**

INPUT WATT	1.2W
LUMENS	260 lm
VOLTAGE	Dual Voltage 120V-277V
BATTERY TYPE	3.6V1000mAh Ni-MH
EM RUN TIME	90 mins
CHARGING TIME	24 hrs
WORKING TEMPERATURE	32°F ~ 104°F
IP RATING	Indoor Damp Location

**DIMENSION**

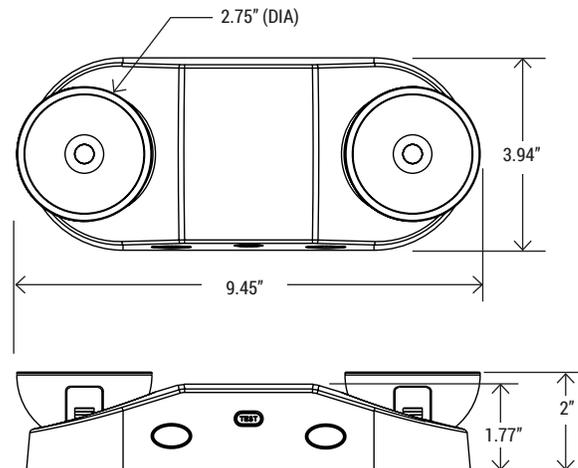

**ORDERING SAMPLE: PT-EML-R**

Series	Style/Shape	Finish	Mounting
PT-EML Double Head Emergency Light	R (Round)	White	Universal mounting (Ceiling, Wall)