


Catalog Number:	Project Name:	Note:	Date:	Type:
-----------------	---------------	-------	-------	-------

Portor Lighting elevates your outdoor spaces with our Bollard Style Lighting. A perfect blend of functionality and aesthetics, our bollard lights bring safety, ambiance, and architectural charm. Experience modern illumination designed to enhance your surroundings, guiding your way with a touch of elegance.

Ideal use for walkways, entrance ways, drives and other small-area lighting applications where low mounting heights are desirable.



#### CONSTRUCTION

Die-cast aluminum body combined with state of the art heat dissipation. Waterproof, built rugged for outdoor harsh conditions.

#### ELECTRICAL

Built with the highest quality, long lasting Universal Voltage driver 120V-27V.

#### MOUNTING

Anchor bolt included, require assembly.

#### ENERGY SAVINGS

Over 70% energy savings than traditional fixtures, low heat productions requires less maintenance and operation cost.

#### LISTING

UL Listed, IP65 rated, DLC Listed

#### WARRANTY

5 year Limited Warranty

WATTAGE	DELIVERED LUMENS	EFFICACY
14W	1960	140 lm/W
19W	2300	140 lm/W
24W	3360	140 lm/W

Based on 3000K setting. Actual lumens may vary.

#### TECHNICAL SPECIFICATION

CCT	3000K/4000K/5000K
CRI	70+
DIMMABLE	0-10V dimmable
VOLTAGE	120V-277V
POWER FACTOR	>0.9
SURGE PROTECTOR	4KV
WORKING TEMPERATURE	-40°F ~ 113°F
IP RATING	IP65 Wet Location
WARRANTY	5 year limited




#### ORDERING SAMPLE: PT-ABL-R-DTP-C-3CP

Complete Series	Shape	Top	Style	CCT/Wattage	Lumen	Lumen/Watt	Finish
<b>PT-ABL</b> Architectural Bollard	<b>R</b> (Round)	<b>DTP</b> (Dome Top)	<b>C</b> (Cone)	<b>3CP</b> (30K/40K/50K) (14W/19W/24W)	1960/2300/3360 Lm	140Lm/W	Bronze

Catalog Number:	Project Name:	Note:	Date:	Type:
-----------------	---------------	-------	-------	-------

DIMENSION

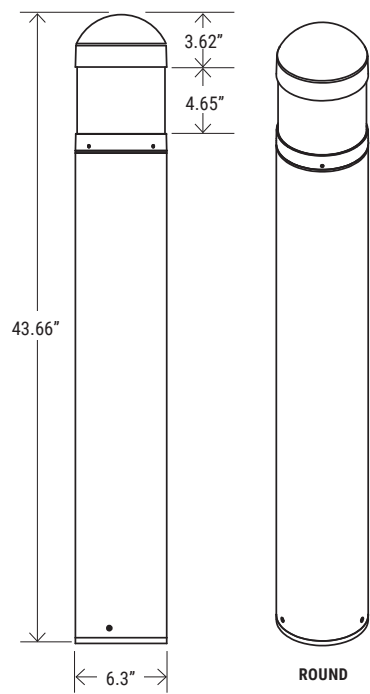

Anchor Bolt  
Require assembly  
(Included)

QTY/CARTON

4

PIECES



SHIELD OPTION



ABL-R-SHLD-180  
Shield for PT-ABL-R series  
bollard

EM BATTERY OPTION



EM  
EM Battery Back-up  
(Actual image may vary)

CATALOG NUMBER	WATTAGE	DELIVERED LUMENS	EFFICACY	DLC PRODUCT ID	CLASSIFICATION
PT-ABL-R-DTP-L-3CP	14W	1960	140 lm/W	S-R0KAHW	
	19W	2300			
	24W	3360			

Based on 3000K setting. Actual lumens may vary.