

| | | | | |
|-----------------|---------------|-------|-------|-------|
| Catalog Number: | Project Name: | Note: | Date: | Type: |
|-----------------|---------------|-------|-------|-------|

DESCRIPTION

Portor's second generation PT-WPM2 series combines economical and security solution for outdoor perimeter and building facades. The LED driver is mounted in direct contact with the casting to promote low operating temperature and long life.

Ideal use for warehouses, walkways, building entry ways, parking lots, retail exteriors and shopping malls.



CONSTRUCTION

Die-Cast aluminum housing. Sealed by a silicone ring that makes the fixture waterproof, internal level ensures installation is horizontal.

DUSK TO DAWN

Internal photocell design which can automatically turn on at dusk and turn off at dawn for up to 70% of energy saving.

ELECTRICAL

Luminaire is built with the highest quality driver that is Universal Voltage (120V-277V), uses long lasting, high-efficient LED packages.

OPTICAL SYSTEM

PC lens designed to reduce glare and improve over-all light distribution through precision formed LED optics.

ENERGY SAVINGS

Over 50% energy savings than traditionally fluorescent fixtures, low heat productions requires less maintenance and operation cost.

LISTING

UL Listed, DLC Premium listed, FCC, RoHS, CE, IP65 rated

WARRANTY

5 year Limited Warranty

| WATTAGE | DELIVERED LUMENS | EFFICACY |
|---------|------------------|----------|
| 15W | 2,129 | 137 lm/W |
| 20W | 2,600 | 130 lm/W |
| 30W | 3,766 | 125 lm/W |

Based on setting @ 5000K. Actual lumens may vary.

TECHNICAL SPECIFICATION

| | |
|---------------------|------------------------|
| CCT | 3000K/4000K/5000K |
| CRI | 80+ |
| DIMMABLE | 0-10V dimming standard |
| SENSOR | Photocell standard |
| VOLTAGE | 120V-277V |
| POWER FREQUENCY | 50/60 Hz |
| POWER FACTOR | >0.9 |
| THD | ≤20% |
| WORKING TEMPERATURE | -40°F - +113°F |
| IP RATING | IP65 Wet Location |
| LIFE SPAN | 50,000 hrs |
| WARRANTY | 5 year limited |



ORDERING SAMPLE:


- - -

| Series | Wattage | CCT |
|------------------------------------------------------|-------------------|--------------------|
| PT-WPM2 Mini Wall Pack Series with CCT Tunable | 15W 20W 30W | 3CCT (30K/40K/50K) |

| Option |
|--------------------|
| Photocell standard |


| | | | | |
|-----------------|---------------|-------|-------|-------|
| Catalog Number: | Project Name: | Note: | Date: | Type: |
|-----------------|---------------|-------|-------|-------|

DUSK TO **DAWN**

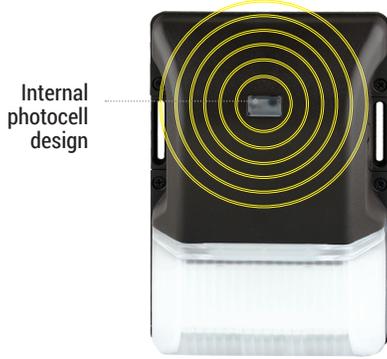

AUTOMATICALLY TURN ON AT DUSK AND TURN OFF AT DAWN FOR UP TO 70% OF ENERGY SAVING.

DIMENSION

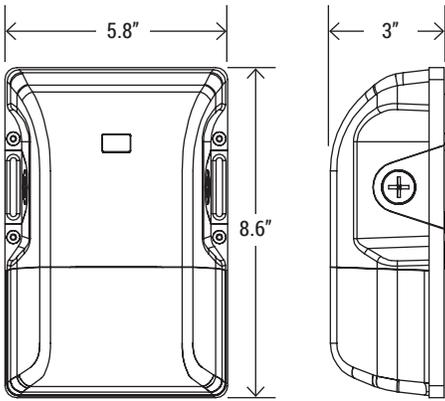

DLC LISTING

| CATALOG NUMBER | WATTAGE | DELIVERED LUMENS | EFFICACY | CCT | DLC PRODUCT ID | CLASSIFICATION |
|----------------|---------|------------------|----------|--------|----------------|----------------|
| PT-WPM2-15W | 15W | 2,129 | 137 lm/W | @5000K | PLMZ5EXRZGTD | PREMIUM |
| PT-WPM2-20W | 20W | 2,600 | 130 lm/W | @5000K | PL31A99KX4XF | PREMIUM |
| PT-WPM2-30W | 30W | 3,766 | 125 lm/W | @5000K | PL8SDT04ZZ44 | PREMIUM |