

Catalog Number:	Project Name:	Note:	Date:	Type:
-----------------	---------------	-------	-------	-------

DESCRIPTION

Why stock three different color temperatures when you can have 3-in-1? Portor's retrofit residential downlights are taking the market by storm! Available in 5"/6" and featuring color tunable technology that lets the user choose between 3000K, 4000K, or 5000K.

Ideal use for residential housings, high-rise condominiums, the healthcare industry, universities/campuses, shopping centers and hospitality.



TUNABLE 3-1 CCT SELECTOR



Easily flip the switch for desired CCT. It's that simple!

CONSTRUCTION

PC driver housing and aluminum reflector with architectural white finish. Standard industry torsion springs adjust to fit 5" and 6" compatible housings. Standard gasket included to ensure proper seal E26/GU24 base.

ELECTRICAL

Luminaire is built with the highest quality 120V drivers, ensuring energy efficiency.

ENERGY SAVINGS

80% more energy savings than halogen lamps. Low heat production requires less air-conditioning requirements, further increasing energy cost savings.

DIMMING

Triac dimmable down to 5%. Compatible with most major brands of dimmers.

LISTING

ETL Listed, FCC, RoHS, CE & Energy Star Listed

TECHNICAL SPECIFICATION

WATTAGE	12W
LUMENS	1040 lumens
EFFICACY	87 lm/W
VOLTAGE	AC120V
POWER FREQUENCY	50/60 Hz
CCT	3000K 4000K 5000K
CRI	Ra>90
IP RATING	IP40, Suitable for damp locations
DIMMABLE	Triac dimming
POWER FACTOR	>0.9
WARRANTY	5 year limited



MODEL NUMBER(S)						
MODEL#	WATTS	LUMENS	LM/WATT	CCT	CRI	VOLTAGE
PT-DLR-6I-12W-3CCT	12W	1040 (1040 lumens at 4000K)	87	3000K/4000K/5000K	>90	120V


Catalog Number:	Project Name:	Note:	Date:	Type:
-----------------	---------------	-------	-------	-------



Easily flip the switch for desired CCT.



DIMENSION

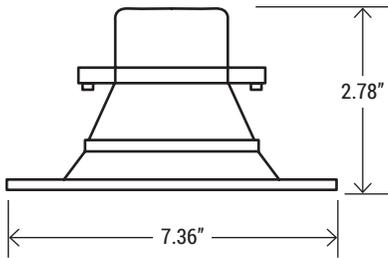

- Fits most 5" & 6" recessed housings
- Sealing gasket standard

ACCESSORY




E26 Adapter included for easy retrofitting

COMPATIBLE DIMMERS

LUTRON	LEVITON
<ul style="list-style-type: none"> • CT-600PR • MSCL-0P153MH • DVWCL-153PH • TGCL-153PR • MA-RR • DVCL-153PR • SCL-153PR • P-PKG1W-WH-R • MACL-153MH 	<ul style="list-style-type: none"> • R00-RNL06-TW • R50-IPL06-10M

PHOTOMETRY

Fixture photometry has been conducted accredited testing laboratory in accordance with IESNA LM79-08.

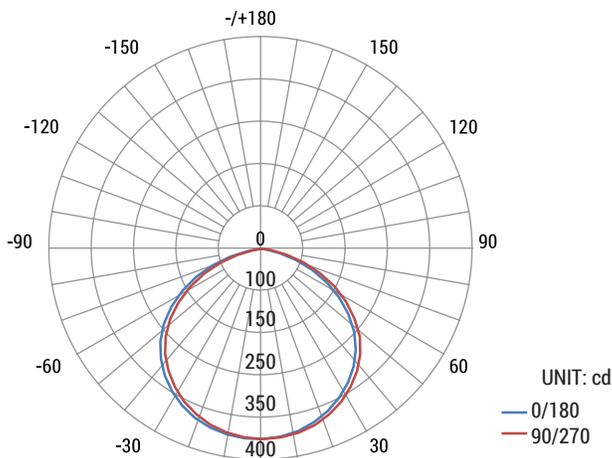

TRIM RING REPLACEMENT (SOLD SEPARATELY)



TR-DLR-6I-BK
6" Black Trim Ring Replacement



TR-DLR-6I-BN
6" Brush Nickel Trim Ring Replacement



TR-DLR-6I-BZ
6" Bronze Trim Ring Replacement