


Project Name:	Notes:	Date:	Type:
---------------	--------	-------	-------

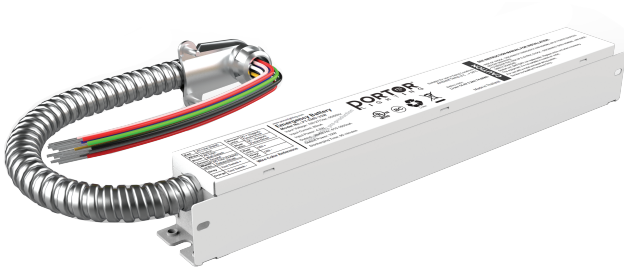


FEATURES

- Emergency battery for use with external drives
- Constant output power
- Self-testing
- High temperature protection

LISTING

- UL Listed for US and Canada

DIMMENSIONS 32W

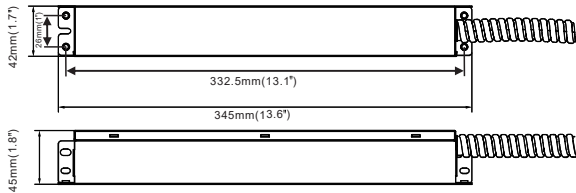

TECHNICAL SPECIFICATION

EMERGENCY POWER	32W
INPUT VOLTAGE	100-277 VAC
POWER FREQUENCY	50/60 Hz
INPUT CURRENT	150mA max
INPUT POWER	8W
RECHARGE TIME	36 hrs
OUTPUT VOLTAGE	20-52 VDC
EMERGENCY OPERATION	90 mins
BATTERY TYPE	Li-ion
AMBIENT TEMP.	32°F - 122°F
WARRANTY	5 year limited




CAUTION:

- In order to avoid electric shock, during AC operation, do not touch or remove any wires.
- During emergency operation, before touching or disconnecting the wires, press the test button to turn the LED lamp and indicator light off to avoid electric shock .

Project Name:	Notes:	Date:	Type:
---------------	--------	-------	-------

WIRING DIAGRAM

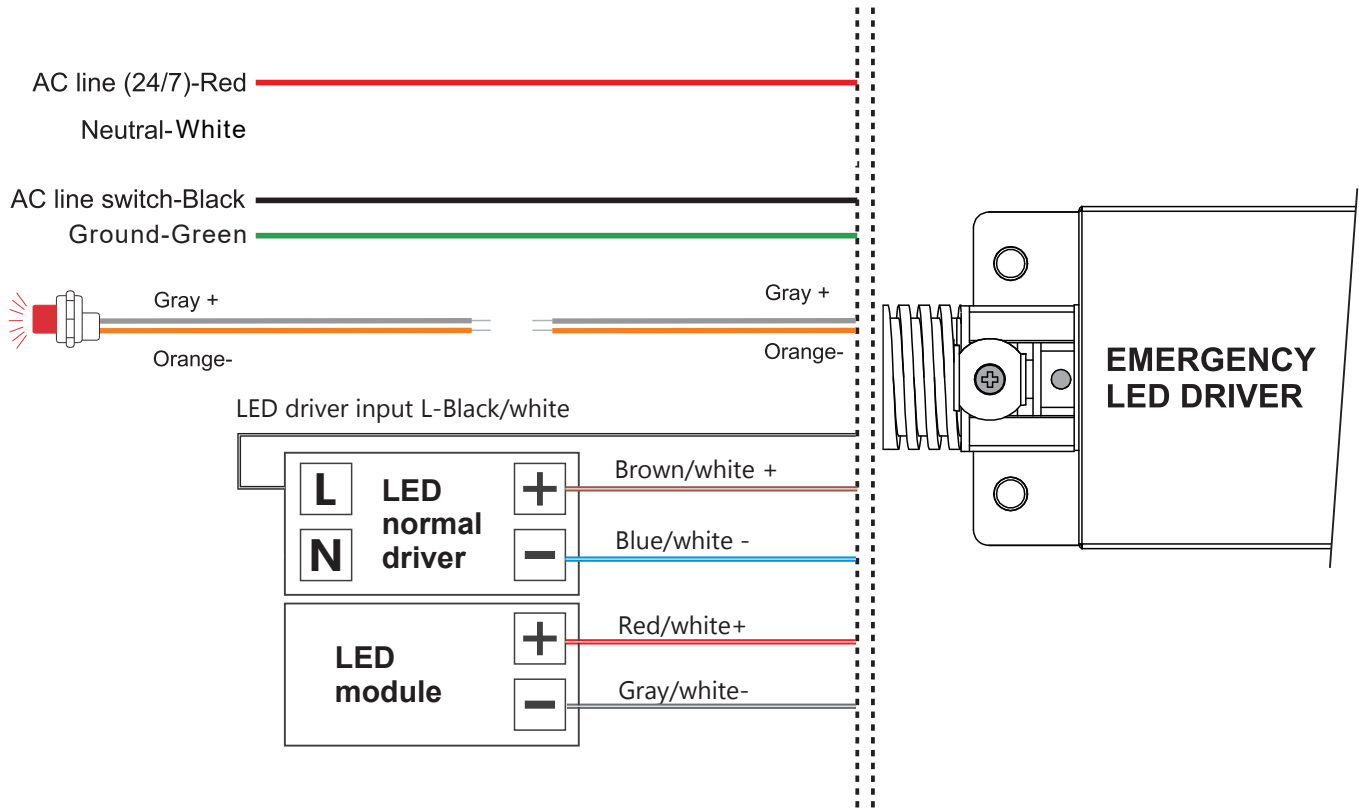

OPERATION

WHEN AC POWER FAILS, EMERGENCY LED DRIVER IMMEDIATELY SWITCHES TO THE EMERGENCY MODE, OPERATING THE LEDS AT A REDUCED LUMEN OUTPUT FOR A MINIMUM OF 90 MINUTES. WHEN AC POWER IS RESTORED, THE EMERGENCY DRIVER AUTOMATICALLY RETURNS TO THE CHARGING MODE.