

|               |        |       |       |
|---------------|--------|-------|-------|
| Project Name: | Notes: | Date: | Type: |
|---------------|--------|-------|-------|

Portor's surface mounted downlights are an ideal solution when recessed fixtures are not an option. Available in multiple apertures, the DLSM2 Series features color tunable technology that lets the user choose between 2700K, 3000K, 3500K, 4000K, or 5000K.

Ideal for drop ceilings, closets, attics, hallways, bathrooms, kitchens, basements, entry ways, porches (covered ceiling only), garages, stairwells, corridors, nursing/retirement homes, condos, elevators, apartments, and any other small areas with limited space.



**FEATURES**

- Edge-lit technology, with no glare or dark spots
- Instant-on
- Slim design
- Integrated LED fixtures
- LED technology fits anywhere you need general light source
- IC rated for direct contact with insulation
- Damp location rated
- Easy to install on standard J-box

**DIMMING**

Triac dimmable down to 100%-10%.  
Compatible with most major brands of dimmers.

**LISTING**

ETL Listed, FCC, RoHS, CE & Energy Star Listed

**TECHNICAL SPECIFICATION**


|                 |  |
|-----------------|--|
| WATTAGE         | <b>10W/15W / 18W / 22W</b>                   |
| VOLTAGE         | 120V, 60 Hz                                  |
| CCT             | <b>2700K / 3000K / 3500K / 4000K / 5000K</b> |
| CRI             | 90   |
| BEAM ANGLE      | 120°   |
| RATING          | Suitable for damp locations                  |
| DIMMABLE        | Triac dimming                                |
| POWER FACTOR    | >0.9   |
| OPERATING TEMP. | 14°F ~ 122°F (-10°C ~ 50°C)                  |
| WARRANTY        | 5 year limited                               |



| MODEL#                         | WATTS | LUMENS | LM/WATT | CCT                               | CRI | VOLTAGE |
|--------------------------------|-------|--------|---------|-----------------------------------|-----|---------|
| <b>PT-DLSM2-S-5I-10W-5CCT</b>  | 10W   | 600    | 73      | 2700K/3000K/3500K/<br>4000K/5000K | 90  | 120V    |
| <b>PT-DLSM2-S-7I-15W-5CCT</b>  | 15W   | 1012   | 73      |                                   |     |         |
| <b>PT-DLSM2-S-9I-18W-5CCT</b>  | 18W   | 1296   | 77      |                                   |     |         |
| <b>PT-DLSM2-S-12I-22W-5CCT</b> | 22W   | 1492   | 63      |                                   |     |         |

(\*Based on the Energy Star LED Luminaires Test Result @ 4000K)

|               |        |       |       |
|---------------|--------|-------|-------|
| Project Name: | Notes: | Date: | Type: |
|---------------|--------|-------|-------|

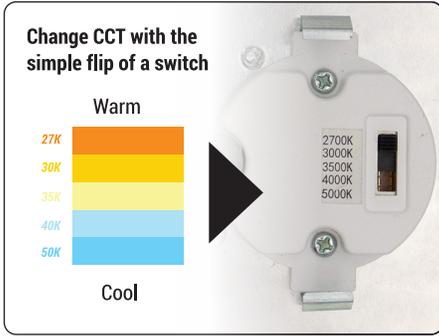

**AVAILABLE TRIM OPTIONS (Sold separately):**



Black




Bronze



Brush Nickel

**DIMENSION**



| MODEL#         | A     | B     | C    |
|----------------|-------|-------|------|
| PT-DLSM2-S-5I  | 4.37" | 4.37" | .67" |
| PT-DLSM2-S-7I  | 6.3"  | 6.3"  | .67" |
| PT-DLSM2-S-9I  | 9"    | 9"    | .67" |
| PT-DLSM2-S-12I | 12"   | 12"   | 1"   |

**RECOMMENDED DIMMER**

| LUTRON   |
|--|
| <ul style="list-style-type: none"> <li>• PD-6WCL</li> <li>• DVCL-153P</li> <li>• CTCL-153P</li> <li>• MACL-153M</li> <li>• TGCL-153P</li> <li>• LGCL-153P</li> </ul> |
| LEVITON  |
| <ul style="list-style-type: none"> <li>• 6681</li> <li>• 6672</li> </ul>   |

**MOUNTING OPTION**

The junction boxes listed below are meant to be a reference list only. Junction box sizes may vary. It is the responsibility of the individual performing the installation to confirm that the fixture can properly and safely work with any junction box.



(For through circuit wiring applications, recommended j-box size is 2-1/8" deep)