


Catalog Number:	Project Name:	Note:	Date:	Type:
-----------------	---------------	-------	-------	-------

Portor's PT-WPH3 series combines economical and security solution for outdoor perimeter and building facades. WPH3 is wattage and color selectable, and can be programmed with a CCT of 4000K, 4500K or 5000K, eliminating the need to stock multiple color temperatures.

Ideal use for warehouses, walkways, building entry ways, parking lots, retail exteriors and shopping malls.

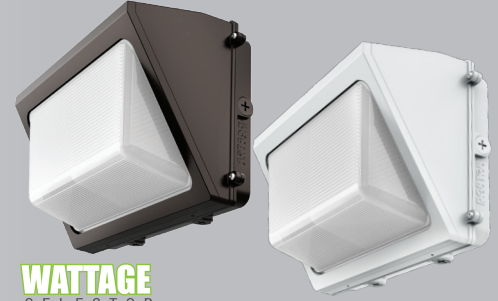

CONSTRUCTION

Hard-plastic material housing. Sealed by a silicone ring that makes the fixture waterproof, internal level ensures installation is horizontal.

OPTICAL SYSTEM

Borosilicate glass lens designed to reduce glare and improve over-all light distribution through precision formed LED optics.

ELECTRICAL

Luminaire is built with the highest quality driver that is universal voltage (120-277V), uses highly-efficient LED packages to ensure cool temperatures for long lasting life span.

CONTROLS

Options available for occupancy sensors with daylight harvesting function.

LISTING

UL Listed, DLC Premium Listed, IP65 Rated, ROHS

LIFESPAN


L70 > 100,000 hours

TECHNICAL SPECIFICATION


WATTAGE	LW (45W/60W/75W) / HW (80W/100W/120W)
CCT	4000K/4500K/5000K
CRI	80+
DIMMING	0-10V dimming
VOLTAGE	120V-277V
POWER FREQUENCY	50/60 Hz
POWER FACTOR	>0.9
THD	≤20%
WORKING TEMPERATURE	-40°F ~ 113°F
IP RATING	IP65 Wet Location
WARRANTY	5 year limited (Standard)



DIMENSION



Sid View

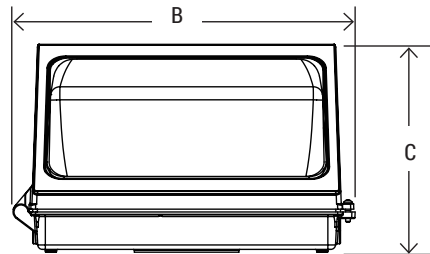







Bottom View

DIMENSION	PT-WPH3-3CP
A	9.24"
B	14.25"
C	7.55"
Net Weight	8 lbs
Gross Weight	9.5 lbs

Catalog Number:	Project Name:	Note:	Date:	Type:
-----------------	---------------	-------	-------	-------

ORDERING SAMPLE: **PT-WPH3-HW-3CP-MS-WP3-MSS-RC-100**


PT-WPH3	-		-	3CP	-		-	
Fixture				Controls/Sensors ³				
Series	Size	CCT/Wattage	Finish	Analog Sensors		Remote		
PT-WPH3	LW (up to 75W)	3CP (45W/60W/75W) (40K/45K/50K)	__ Blank (bronze) W (White)	__ Blank  MS-WP3 Microwave Motion Sensor (100V-277V)		__ Blank  MSS-RC-100 Remote Control		
	HW (up to 120W)	3CP (80W/100W/120W) (40K/45K/50K)						


	-		-		-		-	
Add-On ³	Mounting	Photocell	Fixture Add-on ³	Other Option				
EM Battery	Surface Mount	Integrated Photocell	Transformer²	Warranty				
__ Blank	__ Blank (Wall mount)	__ Blank	__ Blank	__ Blank (5 year standard)				
EM (Pre-installed EM battery)				7YR 7-year Limited Warranty				
 PT-EMN-15W-155 15W Low Output EM Battery Pack (Internal installation)			 PT-SDT-325 325 VA Step down Transformer (Remote installation)	10YR 10-year Limited Warranty				
 PT-EMA-8W 8W AC Emergency Battery Pack (Remote installation)								
 PT-EMA-25W 25W AC Emergency Battery Pack (Remote installation)								
				² TRANSFORMER <i>PT-SDT-325 is a step-down auto-transformer designed to convert high voltage, low current power into low voltage, high current power. It has a maximum power rating of 325VA, which makes it suitable for use in a variety of applications, such as electrical power transmission, distribution, and electronic devices. Remote installation.</i>				
				³ SOLD SEPARATELY				

Catalog Number:	Project Name:	Note:	Date:	Type:
-----------------	---------------	-------	-------	-------

LUMEN PACKAGES

(Delivered lumens are based on the actual IES results)

CATALOG NUMBER	WATTAGE	CCT	DELIVERED LUMENS	EFFICACY (LM/W)	DLC ID
 PT-WPH3-LW-3CP	45W	4000K	6,166	137	S-PUQ9GV
		4500K	6,268	139	
		5000K	6,088	135	
	60W	4000K	8,244	137	
		4500K	8,309	138	
		5000K	7,910	131	
	75W	4000K	9,450	126	
		4500K	9,703	129	
		5000K	9,080	121	

CATALOG NUMBER	WATTAGE	CCT	DELIVERED LUMENS	EFFICACY (LM/W)	DLC ID
 PT-WPH3-HW-3CP	80W	4000K	9,071	113	S-9VT70A
		4500K	9,404	117	
		5000K	9,171	114	
	100W	4000K	11,618	116	
		4500K	12,074	120	
		5000K	11,508	115	
	120W	4000K	13,707	114	
		4500K	14,153	117	
		5000K	13,427	111	



WHAT'S IN THE BOX?

- Fixture
- Installation sheet

QTY/CARTON

1
PIECES