

Catalog Number:	Project Name:	Note:	Date:	Type:
-----------------	---------------	-------	-------	-------

Portor PT-WPF Series is a full cut-off wall mounted luminaire designed in a slim profile to seamlessly blend into the environment while providing clean lines, a stylish finish, and optimal lighting; while maintaining a robust, durable housing. The WPF Series is available in two power selectable sizes with wattages ranging from 36W to 120W and integrates CCT selectable technology with 30K, 40K, and 50K options.

Ideal use for warehouses, walkways, building entry ways, parking lots, retail exteriors and shopping malls.



#### CONSTRUCTION

The die-cast aluminum is a durable, powder-coated housing sealed by a silicone ring which enables the luminaire to achieve dust and weather resistance. The fixture has been constructed and complies with UL wet location ratings, IP65.

#### OPTICAL SYSTEM

Borosilicate glass lens designed to reduce glare and improve over-all light distribution through precision formed LED optics.

#### ELECTRICAL

Luminaire is built with the highest quality driver that is universal voltage (120-277V), uses highly-efficient LED packages to ensure cool temperatures for long lasting life span.

#### CONTROLS

Comes default with integrated photocell. Options available for occupancy sensor.

#### LISTING

UL Listed, DLC Premium Listed, IP65 Rated, ROHS

#### LIFESPAN

L70 > 100,000 hours

#### TECHNICAL SPECIFICATION

WATTAGE	LW (36W/48W/60W) / HW (72W/96W/120W)
CCT	3000K/4000K/5000K
CRI	80+
DIMMING	0-10V dimming
VOLTAGE	120V-277V
POWER FREQUENCY	50/60 Hz
POWER FACTOR	>0.9
THD	≤20%
WORKING TEMPERATURE	-40°F ~ 113°F
IP RATING	IP65 Wet Location
WARRANTY	5 year limited (Standard)




ON OFF




PHOTOCELL SENSOR  
STANDARD

#### DIMENSION



Sid View

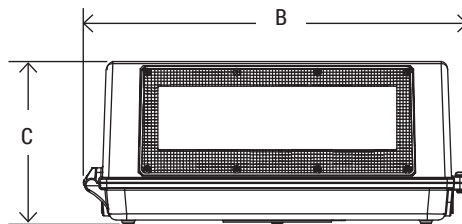







Bottom View

DIMENSION	PT-WPF-3CP
A	9.27"
B	14.2"
C	6"
Net Weight	6 lbs
Gross Weight	7.5 lbs

Catalog Number:	Project Name:	Note:	Date:	Type:
-----------------	---------------	-------	-------	-------

ORDERING SAMPLE: **PT-WPF-HW-3CP-MS-WP3-MSS-RC-100**


PT-WPF		-		-	3CP	-		-	
Fixture						Controls/Sensors <sup>3</sup>			
Series		Size		CCT/Wattage		Finish			
PT-WPF	LW (up to 60W)		3CP (36W/48W/60W) (30K/40K/50K)		__ Blank (bronze) W (White)				
	HW (up to 120W)		3CP (72W/96W/120W) (30K/40K/50K)						
						Analog Sensors		Remote	
						<div>__ Blank</div> <div></div> <div>MS-WP3 Microwave Motion Sensor (100V-277V)</div>		<div>__ Blank</div> <div></div> <div>MSS-RC-100 Remote Control</div>	


	-		-		-		-	
Add-On <sup>3</sup>	Mounting	Photocell	Fixture Add-on <sup>3</sup>	Other Option				
EM Battery	Surface Mount	Integrated Photocell	Transformer <sup>2</sup>	Warranty				
__ Blank	__ Blank (Wall mount)	__ Blank	__ Blank	__ Blank (5 year standard)				
<b>EM</b> (Pre-installed EM battery)				<b>7YR</b> 7-year Limited Warranty				
 <b>PT-EMN-15W-155</b> 15W Low Output EM Battery Pack (Internal installation)			 <b>PT-SDT-325</b> 325 VA Step down Transformer (Remote installation)	<b>10YR</b> 10-year Limited Warranty				
 <b>PT-EMA-8W</b> 8W AC Emergency Battery Pack (Remote installation)								
 <b>PT-EMA-25W</b> 25W AC Emergency Battery Pack (Remote installation)								
				<sup>2</sup> <b>TRANSFORMER</b> <i>PT-SDT-325 is a step-down auto-transformer designed to convert high voltage, low current power into low voltage, high current power. It has a maximum power rating of 325VA, which makes it suitable for use in a variety of applications, such as electrical power transmission, distribution, and electronic devices. Remote installation.</i>				
				<sup>3</sup> <b>SOLD SEPARATELY</b>				

Catalog Number:	Project Name:	Note:	Date:	Type:
-----------------	---------------	-------	-------	-------

### LUMEN PACKAGES

(Delivered lumens are based on the actual IES results)

CATALOG NUMBER	WATTAGE	CCT	DELIVERED LUMENS	EFFICACY (LM/W)	DLC ID
 PT-WPF-LW-3CP	36W	3000K	5,704	152	S-3P0G8M
		4000K	5,954	164	
		5000K	5,506	158	
	48W	3000K	7,066	144	
		4000K	7,552	160	
		5000K	7,359	150	
	60W	3000K	8,331	141	
		4000K	8,856	156	
		5000K	8,706	146	

CATALOG NUMBER	WATTAGE	CCT	DELIVERED LUMENS	EFFICACY (LM/W)	DLC ID
 PT-WPF-HW-3CP	72W	3000K	10,235	149	S-B3QRZ1
		4000K	10,989	163	
		5000K	11,141	160	
	96W	3000K	12,856	141	
		4000K	13,934	157	
		5000K	13,755	150	
	120W	3000K	15,940	137	
		4000K	17,164	153	
		5000K	17,189	147	

### WHAT'S IN THE BOX?

- Fixture
- Installation sheet

QTY/CARTON

**1**

PIECES