


Mini Flood Light with CCT and Wattage Selector

The second generation FLM2 flood light series combines energy efficiency and advanced optical control. The slim profile delivers enhanced lighting performance. Robust housing can withstand harsh outdoor environments.

Available with knuckle mount or a u-bracket mount for convenient mounting option. Ideal use for facades, outdoor, signage, shopping centers, industrial areas and other outdoor places where spot lighting is needed.

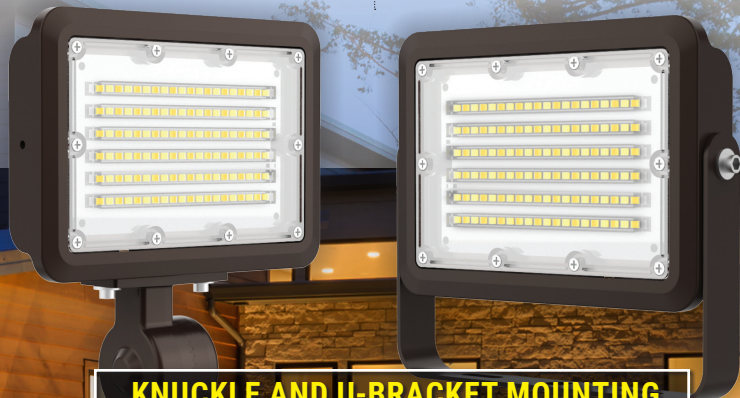

KNUCKLE AND U-BRACKET MOUNTING OPTIONS COME IN THE BOX

TECHNICAL SPECIFICATION

WATTAGES	15W, 30W, 40W/50W/60W
CCT	3000K 4000K 5000K
CRI	70+
DIMMABLE	0-10V dimmable
BEAM ANGLE	130° x 130°
VOLTAGE	120V-277V
POWER FREQUENCY	50/60 Hz
POWER FACTOR	>0.9
WORKING TEMP.	-40°F - +113°F
RATING	IP65 wet location
WARRANTY	5 year limited



CATALOG NUMBER	WATTAGE	DELIVERED LUMENS	EFFICACY	Specs
 PT-FLM2-MW-3CP	40W	6,399	up to 165 lm/W	 SCAN FOR COMPLETE SPECS.
	50W	7,762		
	60W	9,229		

Based on IES results @ 4000K. Actual lumens may vary.

CATALOG NUMBER	WATTAGE	DELIVERED LUMENS	EFFICACY	Specs
 PT-FLM2-15W-3CCT	15W	1,994 @ 3000K	up to 150 lm/W	 SCAN FOR COMPLETE SPECS.
		2,135 @ 4000K		
		2,064 @ 5000K		
 PT-FLM2-30W-3CCT	30W	4,180 @ 3000K	up to 150 lm/W	 SCAN FOR COMPLETE SPECS.
		4,442 @ 4000K		
		4,341 @ 5000K		

Based on IES results. Actual lumens may vary.