

Project Name:

Notes:

JL-T8U-15AB2FT-50C

LED T8 Hybrid U-Bend Tube



DESCRIPTION

Looking for that hard-to-find LED U-Bend tube? Portor Industry has it! Our 6" gap U-bend tubes are made from high-quality PC lens and feature incredible lumen output.

Ideal use for office spaces, warehouses, hotels, restaurants, and schools.

CONSTRUCTION

PC lens tubes with polycarbonate connectors.

ELECTRICAL

Hybrid Type A (with ballast) + Type B (ballast removal) AC line input. Luminaire is built with the highest quality 100- 277V internal drivers.

RETROFIT EASILY

Plug-n-play or by-pass the ballast and save on energy use. Produces uniform light output that is consistent from end-to-end.

DIMMING

Non-dimmable and not compatible with ballast.

LISTING


UL Listed, FCC, RoHS, CE



TECHNICAL SPECIFICATION

WATTAGE	15W				
LUMENS	1,800 lumens				
EFFICACY	120 lm/W				
VOLTAGE	100V-277V				
POWER FREQUENCY	50/60 Hz				
CCT	5000K				
CRI	Ra>80				
BEAM ANGLE	360°				
LENS TYPE	Frosted				
WORKING TEMP.	-40°F - +122°F				
STORAGE TEMP.	-40°F - +158°F				
IP RATING	IP40 Suitable for damp locations				
DIMMABLE	Non-dimmable				
POWER FACTOR	>0.9				
THD	≤20%				
WARRANTY	5 year limited				

DIMENSION

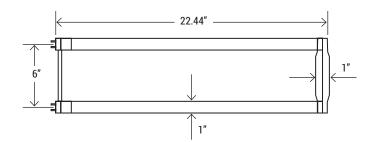

MODEL#	WATTS	LUMENS	LM/WATT	CCT	PORTOR Part#	Product ID
JL-T8U-15AB2FT-50C	15W	1,800	120	5000K	PT-UBT-6INAB-15W-5K-F	PSOTXYUZ

