

Project Name:	Notes:	Date:	Type:
---------------	--------	-------	-------

Portor's surface mounted downlights are an ideal solution when recessed fixtures are not an option. Available in multiple apertures, the DLSM2 Series features color tunable technology that lets the user choose between 2700K, 3000K, 3500K, 4000K, or 5000K.

Ideal for drop ceilings, closets, attics, hallways, bathrooms, kitchens, basements, entry ways, porches (covered ceiling only), garages, stairwells, corridors, nursing/retirement homes, condos, elevators, apartments, and any other small areas with limited space.



**FEATURES**

- Edge-lit technology, with no glare or dark spots
- Instant-on
- Slim design
- Integrated LED fixtures
- LED technology fits anywhere you need general light source
- IC rated for direct contact with insulation
- Damp location rated
- Easy to install on standard J-box

**DIMMING**

Triac dimmable down to 100%-10%.  
Compatible with most major brands of dimmers.

**LISTING**

ETL Listed, FCC, RoHS, CE & Energy Star Listed

WATTAGE	DELIVERED LUMENS	EFFICACY
10W	680	68 lm/W
15W	1095	73 lm/W
18W	1390	77 lm/W
24W	2090	87 lm/W

(\*Based on the Energy Star LED Luminaires Test Result @ 4000K)


**TECHNICAL SPECIFICATION**

VOLTAGE	120V, 60 Hz
CCT	<b>2700K / 3000K / 3500K / 4000K / 5000K</b>
CRI	90
BEAM ANGLE	120°
RATING	Suitable for damp locations
DIMMABLE	Triac dimming
POWER FACTOR	>0.9
WARRANTY	5 year limited



MODEL#	WATTS	LUMENS	LM/WATT	CCT	CRI	VOLTAGE
PT-DLSM2-R-5I-10W-5CCT	10W	680*	68	2700K/3000K/3500K/ 4000K/5000K	90	120V
PT-DLSM2-R-7I-15W-5CCT	15W	1095*	73			
PT-DLSM2-R-9I-18W-5CCT	18W	1398*	77			
PT-DLSM2-R-11I-24W-5CCT	24W	2090*	87			
PT-DLSM2-R-13I-24W-5CCT	24W	2090*	87			

Project Name:	Notes:	Date:	Type:
---------------	--------	-------	-------

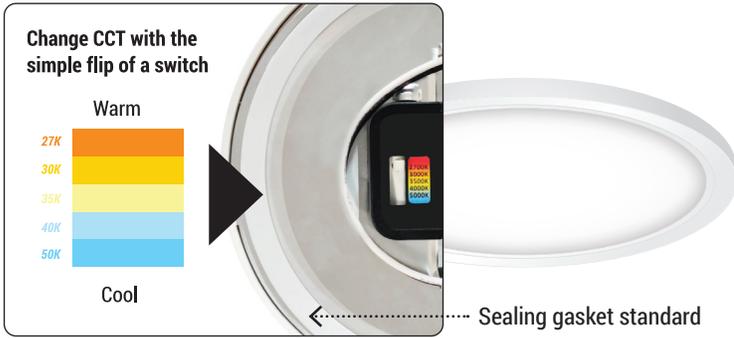


**AVAILABLE TRIM OPTIONS** *(Sold separately)*



**TRIMS ARE ONLY AVAILABLE ON THE 5", 7", AND 9" MODEL**

**DIMENSION**

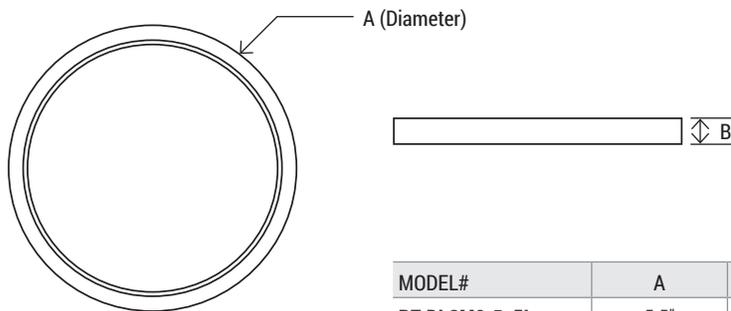

MODEL#	A	B
PT-DLSM2-R-5I	5.5"	.5"
PT-DLSM2-R-7I	7.5"	.5"
PT-DLSM2-R-9I	8.86"	.5"
PT-DLSM2-R-11I	11"	.98"
PT-DLSM2-R-13I	13"	.98"

**RECOMMENDED DIMMER**

LUTRON
<ul style="list-style-type: none"> <li>• PD-6WCL</li> <li>• DVCL-153P</li> <li>• CTCL-153P</li> <li>• MACL-153M</li> <li>• TGCL-153P</li> <li>• LGCL-153P</li> </ul>
LEVITON
<ul style="list-style-type: none"> <li>• 6681</li> <li>• 6672</li> </ul>

**MOUNTING OPTION**

The junction boxes listed below are meant to be a reference list only. Junction box sizes may vary. It is the responsibility of the individual performing the installation to confirm that the fixture can properly and safely work with any junction box.



(For through circuit wiring applications, recommended j-box size is 2-1/8" deep)