

INSTALLATION INSTRUCTIONS

PT-WPS SERIES

PT-WPS-60-3CP / PT-WPS-100-3CP

PORTOR
LIGHTING
a PORTOR INDUSTRY brand



**WATTAGE
SELECTOR**



CAUTION

- AVOID DIRECT EYE EXPOSURE TO THE LIGHT SOURCE WHILE IT IS ON.
- ACCOUNT FOR SMALL PARTS AND DESTROY PACKING MATERIAL, AS THESE MAY BE HAZARDOUS TO CHILDREN.
- **RISK OF BURN.** DISCONNECT POWER AND ALLOW FIXTURE TO COOL BEFORE CHANGING BULB OR HANDLING FIXTURE.

READ THESE INSTRUCTIONS COMPLETELY AND CAREFULLY

SAFETY

THIS FIXTURE MUST BE WIRED IN ACCORDANCE WITH THE NATIONAL ELECTRICAL CODE AND APPLICABLE LOCAL CODES AND ORDINANCES. PROPER GROUNDING IS REQUIRED TO INSURE PERSONAL SAFETY. CAREFULLY OBSERVE THE GROUNDING PROCEDURE UNDER INSTALLATION SECTION. ALL WORK SHOULD BE DONE BY A QUALIFIED ELECTRICIAN.


- **RISK OF ELECTRIC SHOCK** - DISCONNECT POWER AT FUSE OR CIRCUIT BREAKER BEFORE INSTALLING OR SERVICING.
- **RISK OF PERSONAL INJURY** - FIXTURE MAY BECOME DAMAGED AND/OR UNSTABLE IF NOT INSTALLED PROPERLY. TIGHTEN ALL FIXTURE COMPONENTS TO THEIR RECOMMENDED TORQUE VALUES.

WARNING


- TURN OFF ELECTRICAL POWER AT FUSE OR CIRCUIT BREAKER BOX BEFORE WIRING FIXTURE TO THE POWER SUPPLY.
- TURN OFF THE POWER WHEN YOU PERFORM ANY MAINTENANCE.
- VERIFY THAT SUPPLY VOLTAGE IS CORRECT BY COMPARING IT WITH THE LUMINAIRE LABEL INFORMATION.
- ALL WIRING CONNECTIONS SHOULD BE CAPPED WITH UL APPROVED WIRE CONNECTORS.

INSTALLATION 1 (ALWAYS TURN OFF THE POWER SUPPLY FROM MAIN CIRCUIT BREAKER FIRST!)



- 1.** Disassembly the WPS by unscrewing the screws on the side of the fixture.

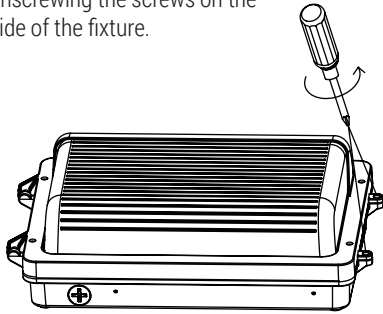


- 2.** Open the fixture, and remove the upper cover of the fixture.)

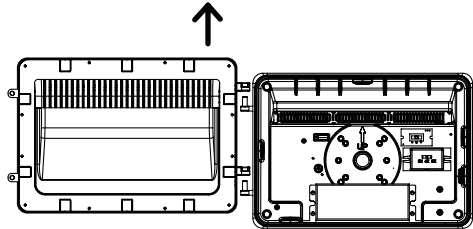


- 3.** Drill mounting holes with an electric drill.




- 4.** Use a screwdriver to remove the plug, Attach the EVA cotton pad to bottom.



- 5.** Lock the bottom shell on the mounting seat with screws, Connect the L, N and G wires to the power supply.

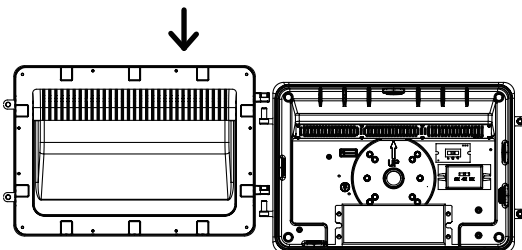

- 6.** Mount the cover of the fixture.



- 7.** Secure the cover by putting the screws back.

INSTALLATION INSTRUCTIONS


PT-WPS SERIES

PT-WPS-60-3CP / PT-WPS-100-3CP


PORTOR
LIGHTING
a PORTOR INDUSTRY brand

INSTALLATION 2 (ALWAYS TURN OFF THE POWER SUPPLY FROM MAIN CIRCUIT BREAKER FIRST!)


- 1.** Disassembly the WPS by unscrewing the screws on the side of the fixture. Open the fixture, and remove the upper cover of the fixture.)

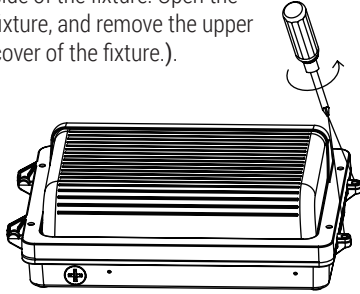


- 2.** Drill mounting holes with an electric drill. Push the expansion rubber plug into the mounting hole on the wall.




- 3.** Lock the bottom shell on the mounting seat with screws.

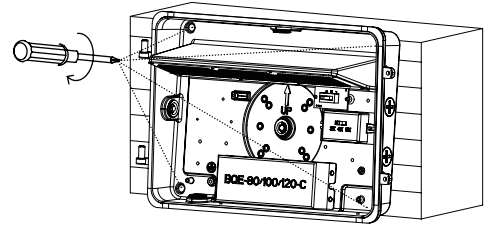


- 4.** Connect the L, N and G wires to the power supply.

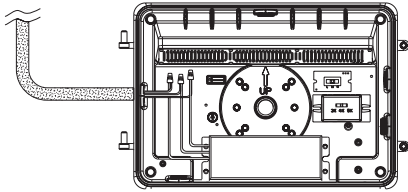


- 5.** Mount the cover of the fixture

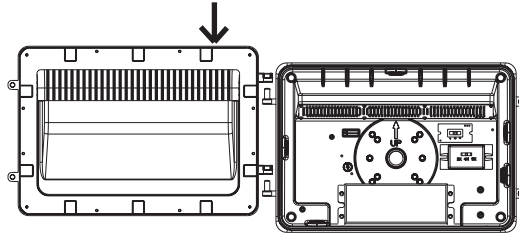

- 6.** Secure the cover by putting the screws back.



Easily flip the switch for desired CCT and Wattage

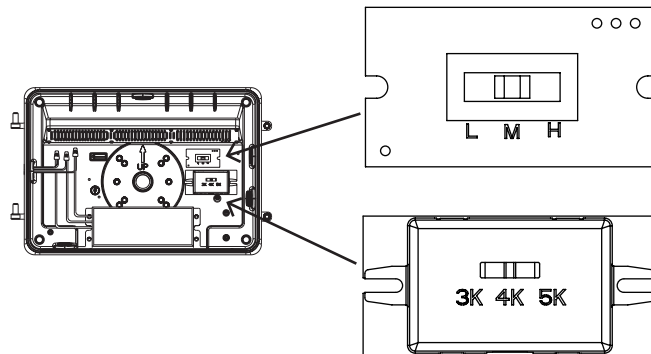

**WATTAGE
SELECTOR**

**3CCT
<SELECTOR>**

WIRING DIAGRAM

