

Catalog Number:	Project Name:	Note:	Date:	Type:
-----------------	---------------	-------	-------	-------





Powered by a DC12V auxiliary source, the PT-BTN enables Luminaire Level Lighting Control (LLC) capabilities in a miniature design with integrated "sensor-ready" functionality to provide connectivity to the non Bluetooth microwave sensor PT-A-EMS-MW.

FEATURES

- 12VDC input
- Integral Bluetooth module
- Sensor-ready attachment port for TEELIO Eco Sensors
- 0-10V output

SPECIFICATIONS

Input Voltage	DC 12V
Input Power	0.5W
Input Current	45mA Max
Output Voltage	DC 10V
Output Current	10mA Max
Output Power	0.1W
Dimming	Class 2, 0-10V DC 10mA Max
Sinking Current	10mA Max
Bluetooth Transmit	200ft Max
Radio Frequency	2.4GHz ± 75MHz
Bluetooth Version	5.0
Housing Material	UL 94-V0
Indoor/Outdoor Use	Indoor Use
Operating Temperature	-22°F to 131°F
Storage Temperature	-22°F to 185°F
IP Rating	IP20
Color	White
Warranty	5 year warranty
Compliance	UL8750, UL1376, RoHS

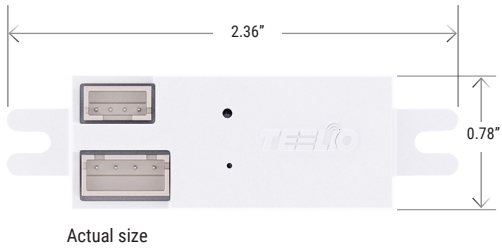

WIRING DIAGRAM

