PT-CBL-54-3CP-4 Series

Corn Bulb with CCT & Wattage Selector

Catalog Number:	Project Name:	Note:	Date:	Type:

36W/45W/54W

Wattage



3CCT <SELECTOR>

WATTAGE SELECTOR


OMNI WIDE ANGLE

SHOCK AND VIBRATION RESISTANT

SHATTER-PROOF DESIGN

SUITABLE FOR FULLY ENCLOSED FIXTURES

CCT & WATTAGE SELECT GUIDANCE

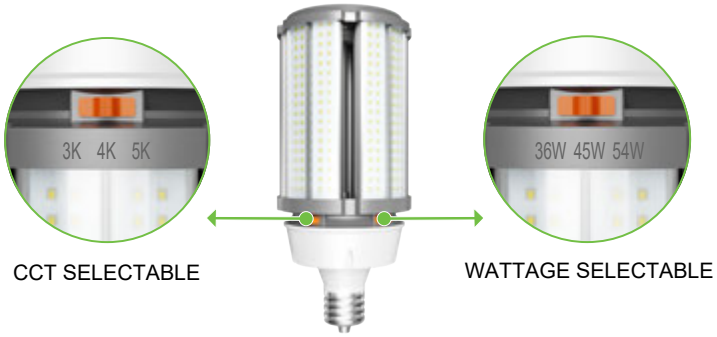

DIMENSION



FEATURES

- High lumen LED bulb for commercial or industrial applications
- For outdoor & indoor use
- Base up, down or horizontal operation
- Replacing HID, CFL, and Incandescent lamps
- Ballast by-pass - direct wire only
- UL approved for enclosed fixtures

DISSIPATION

- Passive cooling via aluminum
- More reliability and less failure

CONSTRUCTION

- Power pack is made of aluminum
- Better for heat dissipation
- Enough space for components on the PCB

TECHNICAL SPECIFICATION

WATTAGE	36W/45W/54W
LUMENS	8,186
EFFICACY	155 lm/W
LAMP BASE	E26 (EX39 adapter included)
VOLTAGE	120V - 277V
POWER FREQUENCY	50/60 Hz
DIMMING	0-10V dimming
CCT	3000K/4000K/5000K
CRI	80
POWER FACTOR	>0.9
OPERATING HUMIDITY	5%~95%
WORKING TEMPERATURE	-40°F ~ 113°F
IP RATING	IP20
WARRANTY	5 year limited (Standard)

c UL us LISTED

5 YEAR Limited Warranty

DAMP LOCATIONS