

Project Name:	Notes:	Date:	Type:
---------------	--------	-------	-------

Portor's 3in1 surface mounted downlights are an ideal solution when recessed fixtures are not an option. Available in multiple apertures, the DL31-BL Series features color tunable technology that lets the user choose between 2700K, 3000K, 3500K, 4000K, or 5000K.

Ideal for drop ceilings, hallways, bathrooms, kitchens, basements, entry ways, porches (covered ceiling only), corridors, nursing/retirement homes, condos, apartments, and any other small areas with limited space.



Direct Mounting

NO RECESSED HOUSING NEEDED

• For Retrofit or New Construction Installation •

FEATURES

- New Construction or Retrofit Installation
- Back-lit technology, with no glare or dark spots
- Easy installation
- Smooth light output
- LED technology fits anywhere you need general light source
- IC rated for direct contact with insulation
- Perfect solution where joists or duct work would normally prevent recessed installation

DIMMING

Triac dimmable down to 100%-10%.

Compatible with most major brands of dimmers.

LISTING

ETL Listed, FCC, RoHS, CE & Energy Star Listed

WATTAGE	DELIVERED LUMENS	EFFICACY
12W	875 LM @ 2700K	up to 79 lm/W
	900 LM @ 3000K	
	950 LM @ 3500K	
	951 LM @ 4000K	
10W	910 LM @ 5000K	up to 68 lm/W
	615 LM @ 2700K	
	654 LM @ 3000K	
	683 LM @ 3500K	
	680 LM @ 4000K	
	628 LM @ 5000K	

Based on IES results. Actual lumens may vary.

TECHNICAL SPECIFICATION

WATTAGE	10W, 12W
VOLTAGE	120V, 60 Hz
CRI	90
CCT	2700K 3000K 3500K 4000K 5000K
BEAM ANGLE	120°
IP RATING	Suitable for damp locations
DIMMABLE	Triac dimming
POWER FACTOR	>0.9
WARRANTY	5 year limited

MODEL NUMBER(S)


MODEL#	WATTS	LUMENS	LM/WATT	CCT	CRI	VOLTAGE
PT-DL31-BL-6I-12W-5CCT	12W	up to 951	79	2700K/3000K/3500K/ 4000K/5000K	90	120V
PT-DL31-BL-4I-10W-5CCT	10W	up to 683	68			




Project Name:	Notes:	Date:	Type:
---------------	--------	-------	-------

3IN1 MOUNTING OPTIONS

6"
APERTURE



4"
APERTURE

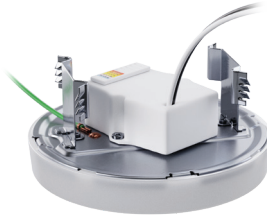


Junction box installation

Recessed Housing installation

Can-Less installation

DIMENSION

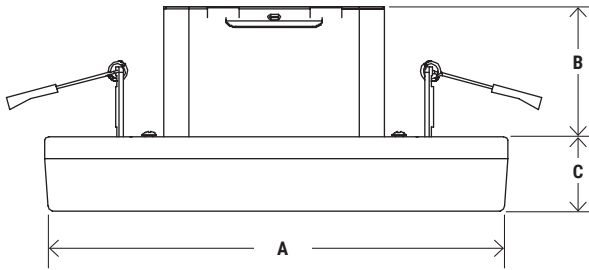

DIMENSION	PT-DL31-BL-6I	PT-DL31-BL-4I
A	7.2"	5"
B	2"	2"
C	1.25"	1.5"

COMPATIBLE DIMMERS

LUTRON*	LEVITON*	LEGRAND
<ul style="list-style-type: none"> • MAESTRO MACL-153MA-WA • DIVA SCL-15 3PA-IV • CASETA PD-5NE • MAESTRO 5-600PA-WH • SKYLARK TGCAL-153PA-WA • TOGGLER DVC L-153P • DIVA DVEL V-300P-WHH 	<ul style="list-style-type: none"> • RDL06-TW 	<ul style="list-style-type: none"> • RADIANT RHCL453PTCCCV6 • ADPD453LG 2

*For more details, please visit company's website