

Catalog Number:	Project Name:	Note:	Date:	Type:
-----------------	---------------	-------	-------	-------


Why stock three different color temperatures when you can have 15-in-1? Portor's retrofit residential downlights are taking the market by storm! Available in 4" and featuring color selectable technology that lets the user choose between 2700K, 3000K, 3500K, 4000K, or 5000K.

Ideal use for residential housings, high-rise condominiums, the healthcare industry, universities/campuses, shopping centers and hospitality.

**15**  
IN  
OPTIONS

**5CCT**  
SELECTOR

**WATTAGE**  
SELECTOR

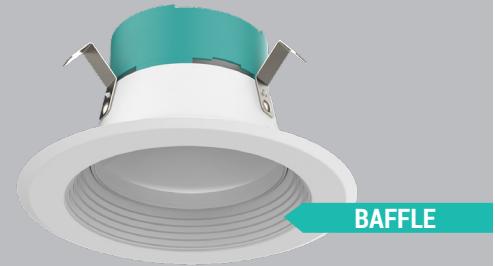

## CONSTRUCTION

PC driver housing and aluminum reflector with architectural white finish. Easy clip-in to existing can housing. Standard gasket included to ensure proper seal. E26 base included.

## ELECTRICAL

Luminaire is built with the highest quality 120V drivers, ensuring energy efficiency.

## ENERGY SAVINGS

80% more energy savings than traditional lamps. Low heat production requires less air-conditioning requirements, further increasing energy cost savings.

## DIMMING

Triac dimmable down to 5%. Compatible with most major brands of dimmers.

## LISTING


ETL Listed, Energy Star Listed, RoHS

## TECHNICAL SPECIFICATION

WATTAGE	6W/8W/10W
CCT	2700K/3000K/3500K/4000K/5000K
CRI	90
DIMMING	Triac dimming
VOLTAGE	120V
POWER FREQUENCY	60 Hz
BEAM ANGLE	100°
POWER FACTOR	>0.9
WORKING TEMPERATURE	-14°F ~ 122°F
IP RATING	IP40, For damp location
WARRANTY	5 year limited (Standard)



## DIMENSION

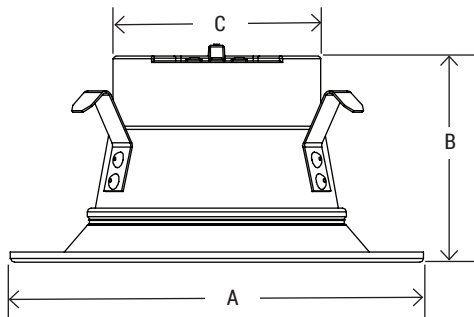






CATALOG NO.	PT-DLR-B-4I-10-5C3P-2
A	5.12"
B	2.77"
C	xx"
Net Weight	.31 lbs
Gross Weight	.42 lbs

Catalog Number:	Project Name:	Note:	Date:	Type:
-----------------	---------------	-------	-------	-------

**ORDERING SAMPLE: PT-DLR-B-4I-10-5C3P**

PT-DLR	-	B	-	4I	-	10	-	5C3P	-	2	-
Fixture											
Series	Style	Size	Max Wattage	CCT/Wattage	Generation						
PT-DLR	B (Baffle)	4I (4" Aperture)	10 (Wattage)	<b>5C3P</b> (27K/30K/35K/40K/50K) (6W/8W/10W)	2 (2nd Generation)						

Control/Sensor <sup>3</sup>	Add-On <sup>3</sup>	Fixture Add-on <sup>3</sup>	Other Option <sup>3</sup>
TEELIO <sup>1</sup>	EM Battery	Trim Ring Replacement	Warranty
__ Blank  <b>PT-BTC-PHA</b> Bluetooth Phase Controller	__ Blank  <b>PT-EMG-25W</b> 25W AC EM Battery Pack (Remote installation)	__ Blank  <b>TR-DLR-4I-BK</b> 4" Black Trim Ring Replacement  <b>TR-DLR-4I-BN</b> 4" Brush Nickel Trim Ring Replacement  <b>TR-DLR-4I-BZ</b> 4" Bronze Trim Ring Replacement	__ Blank (5 year standard) <b>7YR</b> 7-year Limited Warranty <b>10YR</b> 10-year Limited Warranty

**COMPATIBLE DIMMERS**

LUTRON	LEVITON
• CT-600PR • MSCL-0P153MH • DVWCL-153PH • TGCL-153PR • MA-RR • DVCL-153PR • SCL-153PR • P-PKG1W-WH-R • MACL-153MH	• R00-RNL06-TW • R50-IPL06-10M

**<sup>1</sup> DOWNLOAD THE TEELIO APP**




**<sup>3</sup> SOLD SEPARATELY**

Catalog Number:	Project Name:	Note:	Date:	Type:
-----------------	---------------	-------	-------	-------

### LUMEN PACKAGES

(Delivered lumens are based on the actual IES results)

CATALOG NUMBER	WATTAGE	CCT	DELIVERED LUMENS	EFFICACY (LM/W)
 PT-DLR-B-4I-10-5C3P-2	6W	2700K	535	87
		3000K	558	94
		3500K	570	95
		4000K	573	95
		5000K	565	92
	8W	2700K	684	84
		3000K	717	89
		3000K	741	94
		4000K	744	94
		5000K	722	90
	10W	2700K	807	82
		3000K	845	87
		3000K	881	92
		4000K	879	91
		5000K	839	85



E26 Adapter included  
for easy retrofitting

#### WHAT'S IN THE BOX?

- Fixture
- E26 Adapter
- Installation sheet

#### QTY/CARTON

**60**  
PIECES

Catalog Number:	Project Name:	Note:	Date:	Type:
-----------------	---------------	-------	-------	-------


Why stock three different color temperatures when you can have 15-in-1? Portor's retrofit residential downlights are taking the market by storm! Available in 6" and featuring color selectable technology that lets the user choose between 2700K, 3000K, 3500K, 4000K, or 5000K.

Ideal use for residential housings, high-rise condominiums, the healthcare industry, universities/campuses, shopping centers and hospitality.

**15**  
IN  
OPTIONS

**5CCT**  
SELECTOR

**WATTAGE**  
SELECTOR

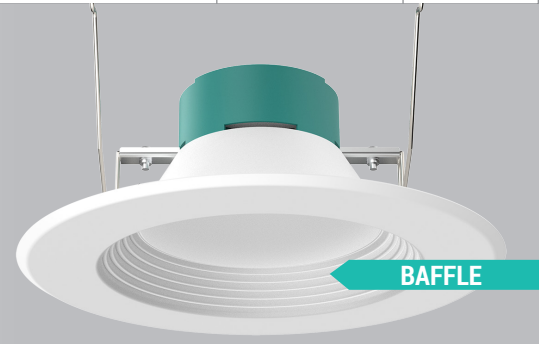

## CONSTRUCTION

PC driver housing and aluminum reflector with architectural white finish. Easy clip-in to existing can housing. Standard gasket included to ensure proper seal. E26 base included.

## ELECTRICAL

Luminaire is built with the highest quality 120V drivers, ensuring energy efficiency.

## ENERGY SAVINGS

80% more energy savings than traditional lamps. Low heat production requires less air-conditioning requirements, further increasing energy cost savings.

## DIMMING

Triac dimmable down to 5%. Compatible with most major brands of dimmers.

## LISTING


ETL Listed, Energy Star Listed, RoHS

## TECHNICAL SPECIFICATION

WATTAGE	7W/10W/14W
CCT	2700K/3000K/3500K/4000K/5000K
CRI	90
DIMMING	Triac dimming
VOLTAGE	120V
POWER FREQUENCY	60 Hz
BEAM ANGLE	100°
POWER FACTOR	>0.9
WORKING TEMPERATURE	-14°F ~ 122°F
IP RATING	IP40, For damp location
WARRANTY	5 year limited (Standard)



## DIMENSION

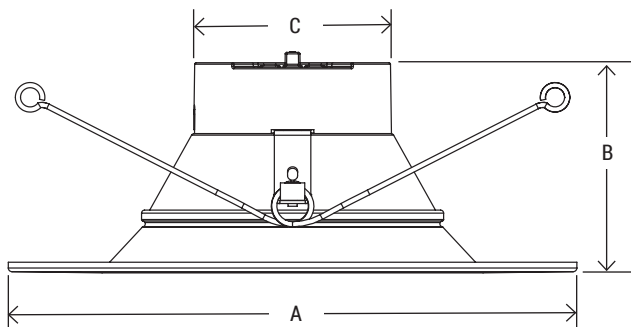






CATALOG NO.	PT-DLR-B-6I-14-5C3P-2
A	7.4"
B	2.9"
C	xx"
Net Weight	.41 lbs
Gross Weight	.61 lbs

Catalog Number:	Project Name:	Note:	Date:	Type:
-----------------	---------------	-------	-------	-------

**ORDERING SAMPLE: PT-DLR-B-6I-14-5C3P**

<b>PT-DLR</b>	-	<b>B</b>	-	<b>6I</b>	-	<b>14</b>	-	<b>5C3P</b>	-	<b>2</b>	-
Fixture											
Series	Style	Size	Max Wattage	CCT/Wattage	Generation						
<b>PT-DLR</b>	<b>B</b> (Baffle)	<b>6I</b> (4" Aperture)	<b>14</b> (Wattage)	<b>5C3P</b> (27K/30K/35K/40K/50K) (7W/10W/14W)	<b>2</b> (2nd Generation)						

Control/Sensor <sup>3</sup>	Add-On <sup>3</sup>	Fixture Add-on <sup>3</sup>	Other Option <sup>3</sup>
<b>TEELIO<sup>1</sup></b>	<b>EM Battery</b>	<b>Trim Ring Replacement</b>	<b>Warranty</b>
<b>Blank</b>  <b>PT-BTC-PHA</b> Bluetooth Phase Controller	<b>Blank</b>  <b>PT-EMG-25W</b> 25W AC EM Battery Pack (Remote installation)	<b>Blank</b>  <b>TR-DLR-6I-BK</b> 6" Black Trim Ring Replacement  <b>TR-DLR-6I-BN</b> 6" Brush Nickel Trim Ring Replacement  <b>TR-DLR-6I-BZ</b> 6" Bronze Trim Ring Replacement	<b>Blank (5 year standard)</b>  <b>7YR</b> 7-year Limited Warranty  <b>10YR</b> 10-year Limited Warranty

**COMPATIBLE DIMMERS**

LUTRON	LEVITON
<ul style="list-style-type: none"> <li>CT-600PR</li> <li>MSCL-0P153MH</li> <li>DVWCL-153PH</li> <li>TGCL-153PR</li> <li>MA-RR</li> </ul>	<ul style="list-style-type: none"> <li>DVCL-153PR</li> <li>SCL-153PR</li> <li>P-PKG1W-WH-R</li> <li>MACL-153MH</li> <li>R00-RNL06-TW</li> <li>R50-IPL06-10M</li> </ul>

**<sup>1</sup> DOWNLOAD THE TEELIO APP**



**<sup>3</sup> SOLD SEPARATELY**