

Catalog Number:	Project Name:	Note:	Date:	Type:
-----------------	---------------	-------	-------	-------


Why stock three different color temperatures when you can have 15-in-1? Portor's retrofit residential downlights are taking the market by storm! Available in 6" and featuring color selectable technology that lets the user choose between 2700K, 3000K, 3500K, 4000K, or 5000K.

Ideal use for residential housings, high-rise condominiums, the healthcare industry, universities/campuses, shopping centers and hospitality.

**15**  
IN  
OPTIONS

**5CCT**  
SELECTOR

**WATTAGE**  
SELECTOR

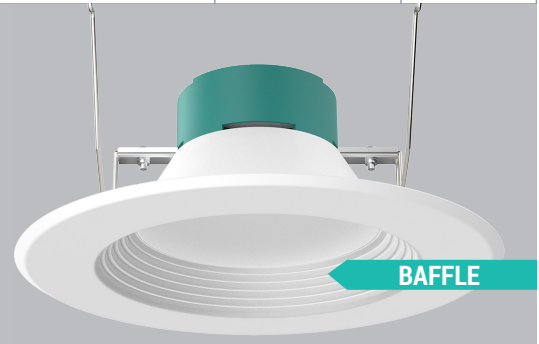

## CONSTRUCTION

PC driver housing and aluminum reflector with architectural white finish. Easy clip-in to existing can housing. Standard gasket included to ensure proper seal. E26 base included.

## ELECTRICAL

Luminaire is built with the highest quality 120V drivers, ensuring energy efficiency.

## ENERGY SAVINGS

80% more energy savings than traditional lamps. Low heat production requires less air-conditioning requirements, further increasing energy cost savings.

## DIMMING

Triac dimmable down to 5%. Compatible with most major brands of dimmers.

## LISTING


ETL Listed, Energy Star Listed, RoHS

## TECHNICAL SPECIFICATION

WATTAGE	7W/10W/14W
CCT	2700K/3000K/3500K/4000K/5000K
CRI	90
DIMMING	Triac dimming
VOLTAGE	120V
POWER FREQUENCY	60 Hz
BEAM ANGLE	100°
POWER FACTOR	>0.9
WORKING TEMPERATURE	-14°F ~ 122°F
IP RATING	IP40, For damp location
WARRANTY	5 year limited (Standard)



## DIMENSION

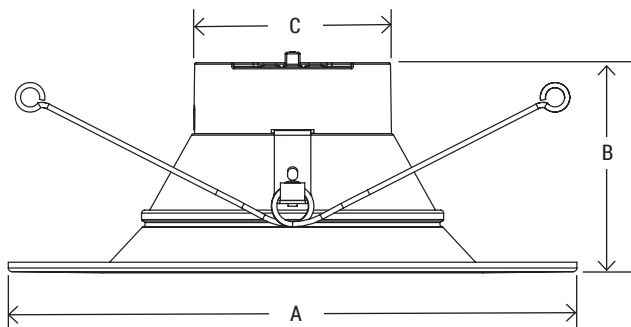






CATALOG NO.	PT-DLR-B-6I-14-5C3P-2
A	7.4"
B	2.9"
C	xx"
Net Weight	.41 lbs
Gross Weight	.61 lbs

Catalog Number:	Project Name:	Note:	Date:	Type:
-----------------	---------------	-------	-------	-------

**ORDERING SAMPLE: PT-DLR-B-6I-14-5C3P**

PT-DLR	-	B	-	6I	-	14	-	5C3P	-	2	-
Fixture											
Series	Style	Size	Max Wattage	CCT/Wattage	Generation						
PT-DLR	B (Baffle)	6I (4" Aperture)	14 (Wattage)	5C3P (27K/30K/35K/40K/50K) (7W/10W/14W)	2 (2nd Generation)						

Control/Sensor <sup>3</sup>	Add-On <sup>3</sup>	Fixture Add-on <sup>3</sup>	Other Option <sup>3</sup>
TEELIO <sup>1</sup>	EM Battery	Trim Ring Replacement	Warranty
__ Blank  <b>PT-BTC-PHA</b> Bluetooth Phase Controller	__ Blank  <b>PT-EMG-25W</b> 25W AC EM Battery Pack (Remote installation)	__ Blank  <b>TR-DLR-6I-BK</b> 6" Black Trim Ring Replacement  <b>TR-DLR-6I-BN</b> 6" Brush Nickel Trim Ring Replacement  <b>TR-DLR-6I-BZ</b> 6" Bronze Trim Ring Replacement	__ Blank (5 year standard) <b>7YR</b> 7-year Limited Warranty <b>10YR</b> 10-year Limited Warranty

**COMPATIBLE DIMMERS**

LUTRON	LEVITON
• CT-600PR • MSCL-0P153MH • DVWCL-153PH • TGCL-153PR • MA-RR • DVCL-153PR • SCL-153PR • P-PKG1W-WH-R • MACL-153MH	• R00-RNL06-TW • R50-IPL06-10M

**<sup>1</sup> DOWNLOAD THE TEELIO APP**



**<sup>3</sup> SOLD SEPARATELY**