


Catalog Number:	Project Name:	Note:	Date:	Type:
-----------------	---------------	-------	-------	-------

Why stock three different color temperatures when you can have 5-in-1? Portor's retrofit residential downlights are taking the market by storm! Available in 5"/6" and featuring color selectable technology that lets the user choose between 2700K, 3000K, 3500K, 4000K, or 5000K.

Ideal use for residential housings, high-rise condominiums, the healthcare industry, universities/campuses, shopping centers and hospitality.



**TUNABLE 5-1 CCT SELECTOR**

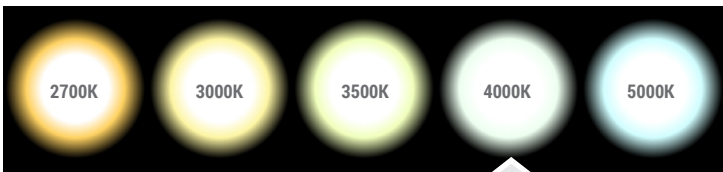

Easily flip the switch for desired CCT. It's that simple!

NOMINAL WATTAGE	DELIVERED LUMENS	EFFICACY
12W	800 LM	up to 66 lm/W
15W	1000 LM	
18W	1150 LM	

*Based on 4000K setting. Actual lumens may vary.*

**CONSTRUCTION**

PC driver housing and aluminum reflector with architectural white finish. Standard industry torsion springs adjust to fit 5" and 6" compatible housings. Standard gasket included to ensure proper seal. E26 base included.

**ELECTRICAL**

Luminaire is built with the highest quality 120V drivers, ensuring energy efficiency.

**ENERGY SAVINGS**

80% more energy savings than traditional lamps. Low heat production requires less air-conditioning requirements, further increasing energy cost savings.

**DIMMING**

Triac dimmable down to 5%. Compatible with most major brands of dimmers.

**LISTING**

ETL Listed, FCC, RoHS, CE & Energy Star Listed

**TECHNICAL SPECIFICATION**

VOLTAGE	120V
POWER FREQUENCY	60 Hz
CRI	90
CCT	2700K   3000K   3500K   4000K   5000K
BEAM ANGLE	100°
IP RATING	IP40, Suitable for damp locations
DIMMABLE	Triac dimming
POWER FACTOR	>0.9
OPERATING TEMP.	14°F ~ 122°F (-10°C ~ 50°C)
WARRANTY	5 year limited




MODEL NUMBER(S)						
MODEL#	WATTS	LUMENS	LM/WATT	CCT	CRI	VOLTAGE
PT-DLR-B-6I-5C3P	12W/15W/18W	800/1000/1150	up to 66	2700K/3000K/3500K/ 4000K/5000K	>90	120V, 60Hz

Catalog Number:	Project Name:	Note:	Date:	Type:
-----------------	---------------	-------	-------	-------

QTY/CARTON

**36**

PIECES

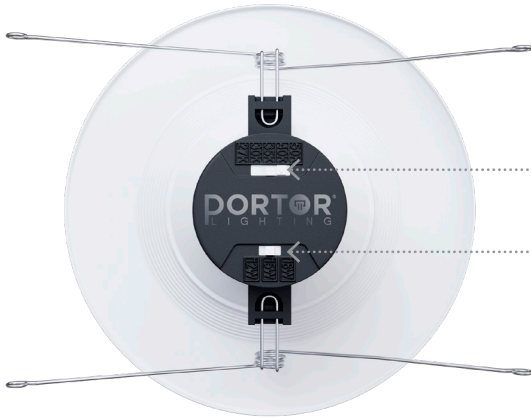

Change color temperature with the simple flip of a switch

2700K | 3000K | 3500K | 4000K | 5000K

Change lumen output for desired application

**12W**  
800 Lm


**15W**  
1000 Lm

**18W**  
1150 Lm



Product weight: .42 lb

**DIMENSION**

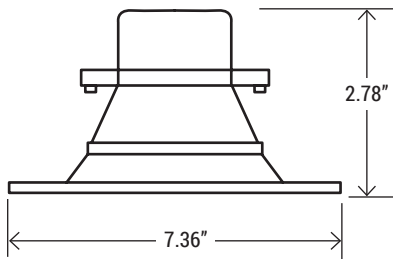

- Fits most 5" & 6" recessed housings
- Sealing gasket standard

**ACCESSORY**




E26 Adapter included for easy retrofitting

**COMPATIBLE DIMMERS**

LUTRON	LEVITON
<ul style="list-style-type: none"> <li>• CT-600PR</li> <li>• MSCL-0P153MH</li> <li>• DVWCL-153PH</li> <li>• TGCL-153PR</li> <li>• MA-RR</li> <li>• DVCL-153PR</li> <li>• SCL-153PR</li> <li>• P-PKG1W-WH-R</li> <li>• MACL-153MH</li> </ul>	<ul style="list-style-type: none"> <li>• R00-RNL06-TW</li> <li>• R50-IPL06-10M</li> </ul>


**BAFFLE TRIM RING REPLACEMENT (SOLD SEPARATELY)**



**TR-DLR-6I-BK**  
6" Black Baffle Trim Ring Replacement



**TR-DLR-6I-BN**  
6" Brush Nickel Baffle Trim Ring Replacement



**TR-DLR-6I-BZ**  
6" Bronze Baffle Trim Ring Replacement