


Catalog Number:	Project Name:	Note:	Date:	Type:
-----------------	---------------	-------	-------	-------

Why stock three different color temperatures when you can have 5-in-1? Portor's retrofit residential downlights are taking the market by storm! Available in 4" and featuring color selectable technology that lets the user choose between 2700K, 3000K, 3500K, 4000K, or 5000K.

Ideal use for residential housings, high-rise condominiums, the healthcare industry, universities/campuses, shopping centers and hospitality.



TUNABLE 5-1 CCT SELECTOR

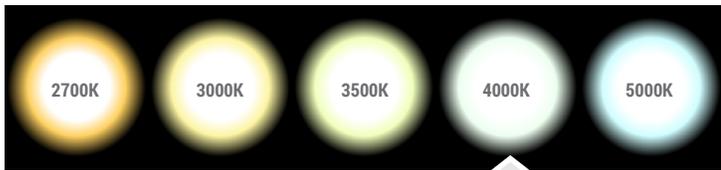

Easily flip the switch for desired CCT. It's that simple!

CONSTRUCTION

PC driver housing and aluminum reflector with architectural white finish. Easy clip-in to existing can housing. Standard gasket included to ensure proper seal. E26 base included.

ELECTRICAL

Luminaire is built with the highest quality 120V drivers, ensuring energy efficiency.

ENERGY SAVINGS

80% more energy savings than traditional lamps. Low heat production requires less air-conditioning requirements, further increasing energy cost savings.

DIMMING

Triac dimmable down to 5%. Compatible with most major brands of dimmers.

LISTING

ETL Listed, FCC, RoHS, CE & Energy Star Listed

NOMINAL WATTAGE	DELIVERED LUMENS	EFFICACY
8W	550 LM	up to 70 lm/W
10W	700 LM	
12W	850 LM	

Based on 4000K setting. Actual lumens may vary.

TECHNICAL SPECIFICATION

VOLTAGE	120V
POWER FREQUENCY	60 Hz
CRI	90
CCT	2700K 3000K 3500K 4000K 5000K
BEAM ANGLE	100°
IP RATING	IP40, Suitable for damp locations
DIMMABLE	Triac dimming
POWER FACTOR	>0.9
OPERATING TEMP.	14°F ~ 122°F (-10°C ~ 50°C)
WARRANTY	5 year limited



MODEL NUMBER(S)						
MODEL#	WATTS	LUMENS	LM/WATT	CCT	CRI	VOLTAGE
PT-DLR-B-4I-5C3P	8W/10W/12W	550/700/850	up to 70	2700K/3000K/3500K/ 4000K/5000K	>90	120V, 60Hz

Catalog Number:	Project Name:	Note:	Date:	Type:
-----------------	---------------	-------	-------	-------

QTY/CARTON

60

PIECES



Change color temperature with the simple flip of a switch

2700K | 3000K | 3500K | 4000K | 5000K

Change lumen output for desired application

8W
550 Lm


10W
700 Lm

12W
850 Lm



Product weight: .28 lb

DIMENSION

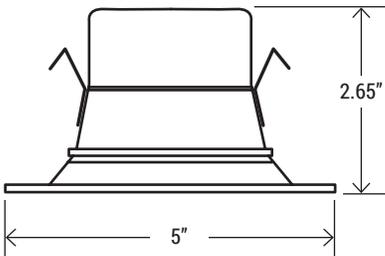

- Fits most 4" recessed housings
- Sealing gasket standard

ACCESSORY



E26 Adapter included for easy retrofitting

COMPATIBLE DIMMERS

LUTRON	LEVITON
<ul style="list-style-type: none"> • CT-600PR • MSCL-0P153MH • DVWCL-153PH • TGCL-153PR • MA-RR • DVCL-153PR • SCL-153PR • P-PKG1W-WH-R • MACL-153MH 	<ul style="list-style-type: none"> • R00-RNL06-TW • R50-IPL06-10M

BAFFLE TRIM RING REPLACEMENT (SOLD SEPARATELY)



TR-DLR-4I-BK
4" Black Baffle Trim Ring Replacement



TR-DLR-4I-BN
4" Brush Nickel Baffle Trim Ring Replacement



TR-DLR-4I-BZ
4" Bronze Baffle Trim Ring Replacement


Catalog Number:	Project Name:	Note:	Date:	Type:
-----------------	---------------	-------	-------	-------

Why stock three different color temperatures when you can have 5-in-1? Portor's retrofit residential downlights are taking the market by storm! Available in 5"/6" and featuring color selectable technology that lets the user choose between 2700K, 3000K, 3500K, 4000K, or 5000K.

Ideal use for residential housings, high-rise condominiums, the healthcare industry, universities/campuses, shopping centers and hospitality.



TUNABLE 5-1 CCT SELECTOR

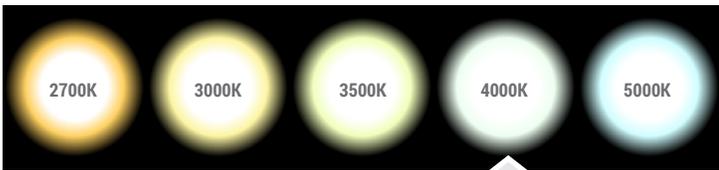

Easily flip the switch for desired CCT. It's that simple!

NOMINAL WATTAGE	DELIVERED LUMENS	EFFICACY
12W	800 LM	up to 66 lm/W
15W	1000 LM	
18W	1150 LM	

Based on 4000K setting. Actual lumens may vary.

CONSTRUCTION

PC driver housing and aluminum reflector with architectural white finish. Standard industry torsion springs adjust to fit 5" and 6" compatible housings. Standard gasket included to ensure proper seal. E26 base included.

ELECTRICAL

Luminaire is built with the highest quality 120V drivers, ensuring energy efficiency.

ENERGY SAVINGS

80% more energy savings than traditional lamps. Low heat production requires less air-conditioning requirements, further increasing energy cost savings.

DIMMING

Triac dimmable down to 5%. Compatible with most major brands of dimmers.

LISTING

ETL Listed, FCC, RoHS, CE & Energy Star Listed

TECHNICAL SPECIFICATION

VOLTAGE	120V
POWER FREQUENCY	60 Hz
CRI	90
CCT	2700K 3000K 3500K 4000K 5000K
BEAM ANGLE	100°
IP RATING	IP40, Suitable for damp locations
DIMMABLE	Triac dimming
POWER FACTOR	>0.9
OPERATING TEMP.	14°F ~ 122°F (-10°C ~ 50°C)
WARRANTY	5 year limited




MODEL NUMBER(S)						
MODEL#	WATTS	LUMENS	LM/WATT	CCT	CRI	VOLTAGE
PT-DLR-B-6I-5C3P	12W/15W/18W	800/1000/1150	up to 66	2700K/3000K/3500K/ 4000K/5000K	>90	120V, 60Hz

Catalog Number:	Project Name:	Note:	Date:	Type:
-----------------	---------------	-------	-------	-------

QTY/CARTON

36

PIECES

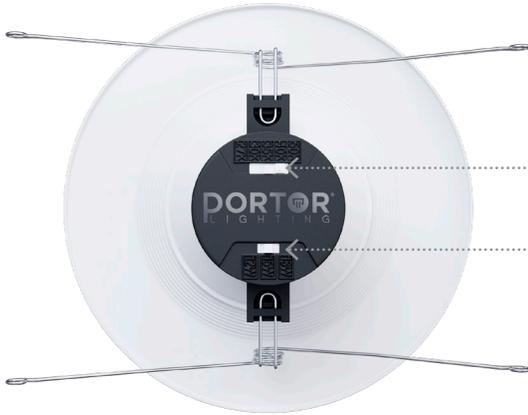

Change color temperature with the simple flip of a switch

2700K | 3000K | 3500K | 4000K | 5000K

Change lumen output for desired application

12W
800 Lm


15W
1000 Lm

18W
1150 Lm



Product weight: .42 lb

DIMENSION

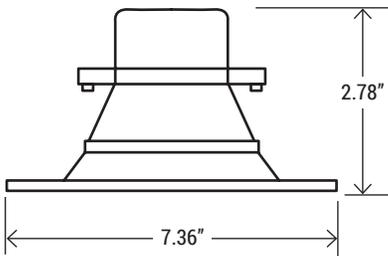

- Fits most 5" & 6" recessed housings
- Sealing gasket standard

ACCESSORY



E26 Adapter included for easy retrofitting

COMPATIBLE DIMMERS

LUTRON	LEVITON
<ul style="list-style-type: none"> • CT-600PR • MSCL-0P153MH • DVWCL-153PH • TGCL-153PR • MA-RR • DVCL-153PR • SCL-153PR • P-PKG1W-WH-R • MACL-153MH 	<ul style="list-style-type: none"> • R00-RNL06-TW • R50-IPL06-10M

BAFFLE TRIM RING REPLACEMENT (SOLD SEPARATELY)



TR-DLR-6I-BK
6" Black Baffle Trim Ring Replacement



TR-DLR-6I-BN
6" Brush Nickel Baffle Trim Ring Replacement



TR-DLR-6I-BZ
6" Bronze Baffle Trim Ring Replacement