

Catalog Number:	Project Name:	Note:	Date:	Type:
-----------------	---------------	-------	-------	-------

Portor's second generation commercial grade recessed gimbal downlight is color tunable, which can be programmed with a CCT of 2700K, 3000K, 3500K, 4000K, or 5000K, eliminating the need to stock multiple color temperatures.

Ideal use for commercial complexes, hospitality, healthcare industry, schools, shopping centers, industrial areas and hotels.



CONSTRUCTION

Die-cast aluminum housing and trim finished in architectural white for lasting durability and corrosion resistance. Designed for new construction, remodel, and retrofit applications.

INSTALLATION

Universal spring clips accommodate a broad range of commercial recessed housings, allowing for fast, secure, tool-free installation.

ELECTRICAL

Factory-integrated high-efficiency 120V LED driver delivers reliable performance with smooth Triac dimming compatibility.

LISTING

ETL, FCC, T24, ES, T20

LIFESPAN


5 year Limited Warranty, L70 50,000 hours.

TECHNICAL SPECIFICATION

CCT	2700K/3000K/3500K/4000K/5000K
CRI	90
DIMMING	Triac dimming
VOLTAGE	120V
POWER FREQUENCY	60 Hz
CURRENT	4" 65mA, 6" 100mA
POWER FACTOR	>0.9
THD	≤20%
IP RATING	Wet Location
WARRANTY	5 year limited (Standard)



DIMENSION

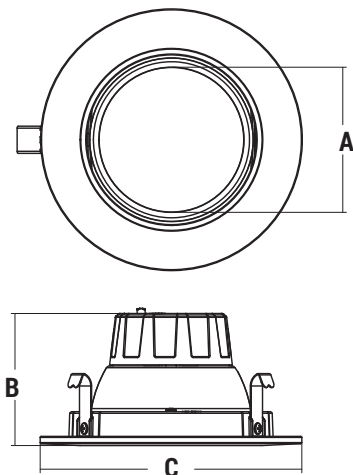

CATALOG NO.	PT-DLR-G-4I-8W-5CCT-2	PT-DLR-G-6I-11W-5CCT-2
A	2.79"	3.30"
B	2.54"	2.90"
C	5.03"	7.20"

Catalog Number:	Project Name:	Note:	Date:	Type:
-----------------	---------------	-------	-------	-------

ORDERING SAMPLE: **PT-DLR-G-4I-8W-5CCT-2-**

PT-DLR-G			5CCT	2		
Fixture					Controls/Sensors (Sold separately)	Add-On ³
Series	Size	Max Wattage	CCT	Generation	TEELIO ¹	EM Battery
PT-DLR-G	4I (4 Inch)	8W	5CCT (27K/30K/35K/ 40K/50K)	2	__ Blank  PT-BTC-PHA Phase Dimming Controller	__ Blank  PT-EMA-25W 25W Low Output EM Battery Pack
	6I (6 Inch)	11W				

¹ **DOWNLOAD THE TEELIO APP**



² **TRANSFORMER**

PT-SDT-325 is a step-down auto-transformer designed to convert high voltage, low current power into low voltage, high current power. It has a maximum power rating of 325VA, which makes it suitable for use in a variety of applications, such as electrical power transmission, distribution, and electronic devices. Remote installation.

³ **SOLD SEPARATELY**

Catalog Number:	Project Name:	Note:	Date:	Type:
-----------------	---------------	-------	-------	-------

LUMEN PACKAGES

(Delivered lumens are based on the actual IES results)

CATALOG NUMBER	WATTAGE	CCT	DELIVERED LUMENS	EFFICACY (LM/W)
 PT-DLR-G-4I-8W-5CCT-2	8W	2700K	741	100
		3000K	776	106
		3500K	819	113
		4000K	832	114
		5000K	815	110

CATALOG NUMBER	WATTAGE	CCT	DELIVERED LUMENS	EFFICACY (LM/W)
 PT-DLR-G-6I-11W-5CCT-2	11W	2700K	1,125	102
		3000K	1,148	104
		3500K	1,173	107
		4000K	1,169	106
		5000K	1,160	106

QTY/CARTON

WHAT'S IN THE BOX?

- Fixture
- E26 Adapter
- Installation sheet

6
PIECES