


Catalog Number:	Project Name:	Note:	Date:	Type:
-----------------	---------------	-------	-------	-------

With CCT selector technology, and 60° tilting/360° rotating capability, Portor's second generation 4" gimbal retrofit kit downlights make accent, spot lighting, and wall washing so easy!

Gimbal downlights are ideal for both commercial and residential lighting, and are optimal for sloped ceilings, wall washing and general purpose lighting.

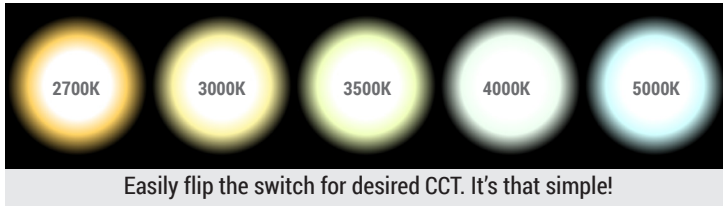

NOMINAL WATTAGE	DELIVERED LUMENS	EFFICACY
10W	634 LM @ 2700K	up to 72 lm/W
	676 LM @ 3000K	
	708 LM @ 3500K	
	720 LM @ 4000K	
	677 LM @ 5000K	

Actual lumens may vary.

CONSTRUCTION

Aluminum die-cast body and trim with architectural white finish. Designed for new construction, remodel or retrofit. Standard gasket included to ensure proper seal.

ELECTRICAL

Luminaire is built with the highest quality 120V drivers, ensuring energy efficiency.

ENERGY SAVINGS

80% more energy savings than fluorescent lamps. Low heat production requires less air-conditioning requirements, further increasing energy cost savings.

DIMMING

100%-10% dimming capability, this fixture is compatible with industry standard TRIAC/ELV dimmers.

LISTING

Energy Star Listed , ETL Listed, RoHS

TECHNICAL SPECIFICATION

VOLTAGE	120V, 50/60Hz
CRI	90
CCT	2700K 3000K 3500K 4000K 5000K
BEAM ANGLE	100°
IP RATING	Suitable for damp locations
DIMMABLE	Triac dimming
POWER FACTOR	>0.9
OPERATING TEMP.	14°F ~ 104°F (-10°C ~ 50°C)
LIFESPAN	50,000 hrs (Based on 3 hrs/day)
WARRANTY	5 year limited



ORDERING SAMPLE: PT-DLR-G-4I-10W-5CCT


Series	Watts	Lumens	Lms/Watt	CCT	CRI	Voltage
PT-DLR-G-4I-10W-5CCT	10W	720 @4000K	up to 72	2700K/3000K/3500K/4000K/5000K	90	120V

Catalog Number:	Project Name:	Note:	Date:	Type:
-----------------	---------------	-------	-------	-------

QTY/CARTON


24

PIECES

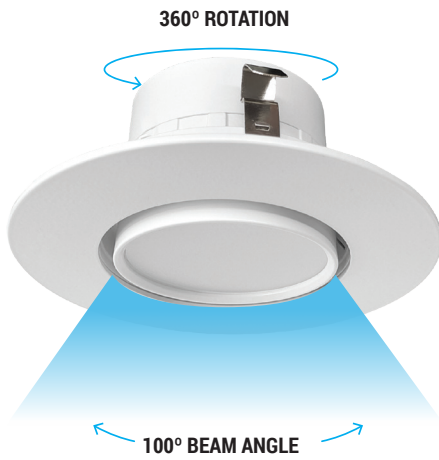

E26 Adapter
(Included)


DIMENSION

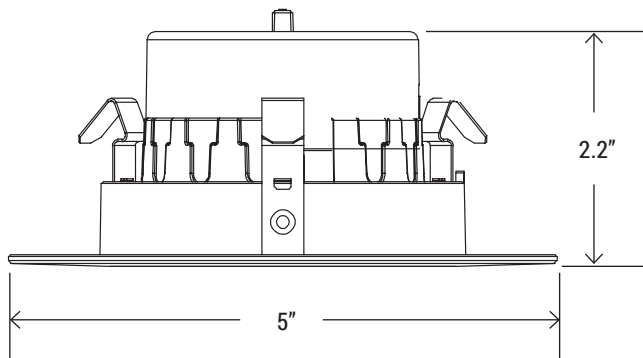

Catalog Number:	Project Name:	Note:	Date:	Type:
-----------------	---------------	-------	-------	-------

With CCT selector technology, and 60° tilting/360° rotating capability, Portor's second generation 6" gimbal retrofit kit downlights make accent, spot lighting, and wall washing so easy!

Gimbal downlights are ideal for both commercial and residential lighting, and are optimal for sloped ceilings, wall washing and general purpose lighting.

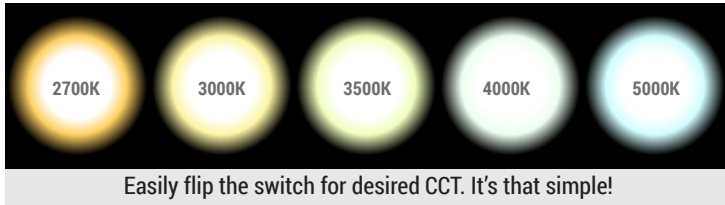

NOMINAL WATTAGE	DELIVERED LUMENS	EFFICACY
16W	1018 LM @ 2700K	up to 74 lm/W
	1070 LM @ 3000K	
	1168 LM @ 3500K	
	1193 LM @ 4000K	
	1077 LM @ 5000K	

Actual lumens may vary.

CONSTRUCTION

Aluminum die-cast body and trim with architectural white finish. Designed for new construction, remodel or retrofit. Standard gasket included to ensure proper seal.

ELECTRICAL

Luminaire is built with the highest quality 120V drivers, ensuring energy efficiency.

ENERGY SAVINGS

80% more energy savings than fluorescent lamps. Low heat production requires less air-conditioning requirements, further increasing energy cost savings.

DIMMING

100%-10% dimming capability, this fixture is compatible with industry standard TRIAC/ELV dimmers.

LISTING

Energy Star Listed , ETL Listed, RoHS

TECHNICAL SPECIFICATION

VOLTAGE	120V, 50/60Hz
CRI	90
CCT	2700K 3000K 3500K 4000K 5000K
BEAM ANGLE	100°
IP RATING	Suitable for damp locations
DIMMABLE	Triac dimming
POWER FACTOR	>0.9
OPERATING TEMP.	14°F ~ 104°F (-10°C ~ 50°C)
LIFESPAN	50,000 hrs (Based on 3 hrs/day)
WARRANTY	5 year limited



ORDERING SAMPLE: PT-DLR-G-6I-16W-5CCT



Series	Watts	Lumens	Lms/Watt	CCT	CRI	Voltage
PT-DLR-G-6I-16W-5CCT	16W	1193 @4000K	up to 74	2700K/3000K/3500K/4000K/5000K	90	120V

Catalog Number:	Project Name:	Note:	Date:	Type:
-----------------	---------------	-------	-------	-------

QTY/CARTON

24

PIECES

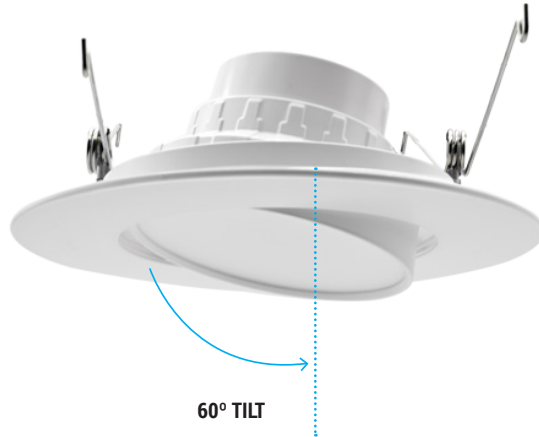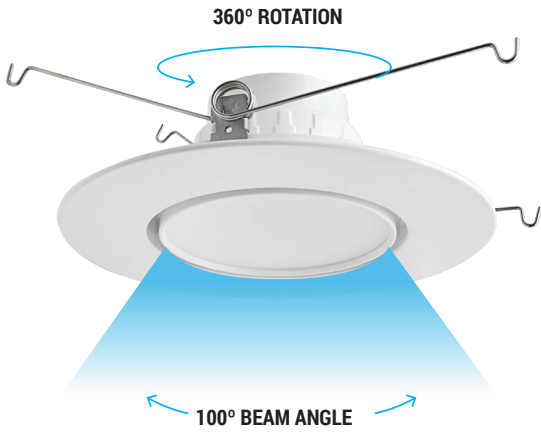

E26 Adapter
(Included)

DIMENSION

