

PT-DLR-S-4I-10-5C3P-2

4" Smooth Retrofit Recessed Downlight with CCT and Wattage Selector

Note: Date: Catalog Number: Project Name: Type:

Why stock three different color temperatures when you can have 15-in-1? Portor's retrofit residential downlights are taking the market by storm! Available in 4" and featuring color selectable technology that lets the user choose between 2700K, 3000K, 3500K, 4000K, or 5000K.

Ideal use for residential housings, high-rise condominiums, the healthcare industry, universities/campuses, shopping centers and hospitality.









CONSTRUCTION

PC driver housing and aluminum reflector with architectural white finish. Easy clip-in to existing can housing. Standard gasket included to ensure proper seal. E26 base included.

ELECTRICAL

Luminaire is built with the highest quality 120V drivers, ensuring energy efficiency.

ENERGY SAVINGS

80% more energy savings than traditional lamps. Low heat production requires less air-conditioning requirements, further increasing energy cost savings.

Triac dimmable down to 5%. Compatible with most major brands of dimmers.

LISTING

ETL Listed, Energy Star Listed, RoHS

TECHNICAL SPECIFICATION

WATTAGE	6W/8W/10W
CCT	2700K/3000K/3500K/4000K/5000K
CRI	90
DIMMING	Triac dimming
VOLTAGE	120V
POWER FREQUENCY	60 Hz
BEAM ANGLE	100°
POWER FACTOR	>0.9
WORKING TEMPERATURE	-14°F ~ 122°F
IP RATING	IP40, For damp location
WARRANTY	5 year limited (Standard)


















DIMENSION



www.portorlighting.com

CATALOG NO.	PT-DLR-B-4I-10-5C3P-2
Α	5.12"
В	2.77"
С	xx"
Net Weight	.31 lbs
Gross Weight	.42 lbs



Version: 06.16.25



PT-DLR-S-4I-10-5C3P-2

4" Smooth Retrofit Recessed Downlight with CCT and Wattage Selector

Catalog Number:	Project Name:	Note:	Date:	Туре:

ORDERING SAMPLE: PT-DLR-S-4I-10-5C3P

PT-DLR	-	S	-	41	-	10	-	5C3P	-	2	-	
	Fixture											
Series Style Size Max Wattage CCT/Wattage Generation												
PT-DLR		S (Smooth)		4I (4" Aperture)		10 (Wattage)		5C3P (27K/30K/35K/40K/50K) (6W/8W/10W)		2 (2nd Generation)		









COMPATIBLE DIMMERS

LUTRON		LEVITON	
• CT-600PR • MSCL-0P153MH • DVWCL-153PH • TGCL-153PR • MA-RR	• DVCL-153PR • SCL-153PR • P-PKG1W-WH-R • MACL-153MH	• R00-RNL06-TW • R50-IPL06-10M	

www.portorlighting.com

¹DOWNLOAD THE TEELIO APP





³SOLD SEPARATELY





PT-DLR-S-4I-10-5C3P-2

4" Smooth Retrofit Recessed Downlight with CCT and Wattage Selector

Catalog Number:	Project Name:	Note:	Date:	Туре:

LUMEN PACKAGES

(Delivered lumens are based on the actual IES results)

CATALOG NUMBER	WATTAGE	ССТ	DELIVERED LUMENS	EFFICACY (LM/W)
		2700К	535	87
		3000K	558	94
	6W	3500К	570	95
		4000K	573	95
		5000K	565	92
		2700K	684	84
		3000K	717	89
	8W	3000K	741	94
		4000K	744	94
PT-DLR-S-4I-10-5C3P-2		2700K 535 3000K 558 3000K 570 4000K 573 5000K 565 2700K 684 3000K 717 8W 3000K 741 4000K 744 5000K 722 2700K 807 3000K 845	722	90
		2700K	807	82
		3000K	845	87
	10W	3000K	881	92
		4000K	879	91
		5000K	839	85



Version: 06.16.25

WHAT'S IN THE BOX?

- Fixture
- E26 Adapter
- Installation sheet

QTY/CARTON **PIECES**



www.portorlighting.com



PT-DLR-S-6I-14-5C3P-2

5"/6" Smooth Retrofit Recessed Downlight with CCT and Wattage Selector

Why stock three different color temperatures when you can have 15-in-1? Portor's retrofit residential downlights are taking the market by storm! Available in 6" and featuring color selectable technology that lets the user choose between 2700K, 3000K, 3500K, 4000K, or 5000K.

Ideal use for residential housings, high-rise condominiums, the healthcare industry, universities/campuses, shopping centers and hospitality.

CONSTRUCTION

PC driver housing and aluminum reflector with architectural white finish. Easy clip-in to existing can housing. Standard gasket included to ensure proper seal. E26 base included.

ELECTRICAL

Luminaire is built with the highest quality 120V drivers, ensuring energy efficiency.

ENERGY SAVINGS

80% more energy savings than traditional lamps. Low heat production requires less air-conditioning requirements, further increasing energy cost savings.

DIMMING

Triac dimmable down to 5%. Compatible with most major brands of dimmers.

LISTING

ETL Listed, Energy Star Listed, RoHS

TECHNICAL SPECIFICATION

WATTAGE	7W/10W/14W
CCT	2700K/3000K/3500K/4000K/5000K
CRI	90
DIMMING	Triac dimming
VOLTAGE	120V
POWER FREQUENCY	60 Hz
BEAM ANGLE	100°
POWER FACTOR	>0.9
WORKING TEMPERATURE	-14°F ~ 122°F
IP RATING	IP40, For damp location
WARRANTY	5 year limited (Standard)


















DIMENSION



CATALOG NO.	PT-DLR-B-6I-14-5C3P-2
Α	7.4"
В	2.9"
С	xx"
Net Weight	.41 lbs
Gross Weight	.61 lbs





PT-DLR-S-6I-14-5C3P-2

5"/6" Smooth Retrofit Recessed Downlight with CCT and Wattage Selector

Catalog Number:	Project Name:	Note:	Date:	Туре:


ORDERING SAMPLE: PT-DLR-S-6I-14-5C3P

PT-DLR	-	S	-	61	-	14	-	5C3P	-	2	-	
	Fixture											
Series		Style		Size		Max Wattage		CCT/Wattage		Generation		
PT-DLR		S (Smooth)		6I (4" Aperture)		14 (Wattage)		5C3P (27K/30K/35K/40K/50K) (7W/10W/14W)		2 (2nd Generation)		







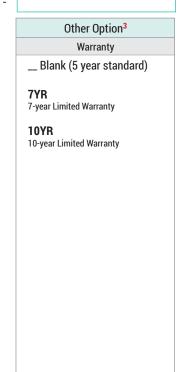

COMPATIBLE DIMMERS

LUTRON		LEVITON	
• CT-600PR • MSCL-0P153MH • DVWCL-153PH • TGCL-153PR • MA-RR	• DVCL-153PR • SCL-153PR • P-PKG1W-WH-R • MACL-153MH	• R00-RNL06-TW • R50-IPL06-10M	

www.portorlighting.com

¹DOWNLOAD THE TEELIO APP





³SOLD SEPARATELY

Version: 06.16.25

