

Catalog Number:	Project Name:	Note:	Date:	Type:
-----------------	---------------	-------	-------	-------

No can or housing needed! Install directly into ceilings with 2" clearance. Portor's slim round profile residential downlights are taking the market by storm! Available in 4" and featuring color tunable technology that lets the user choose between 2700K, 3000K, 3500K, 4000K, or 5000K.

Ideal for soffits, drop ceilings, closets, attics, hallways, bathrooms, kitchens, basements, entry ways, porches (covered ceiling only), garages, stairwells, corridors, nursing/retirement homes, condos, elevators, apartments, and any other small areas with limited space.



## FEATURES

- Edge-lit technology, with no glare or dark spots
- Instant-on
- Ultra slim design, 1" thickness
- Integrated LED fixtures
- LED technology fits anywhere you need general light source
- IC rated for direct contact with insulation
- Perfect solution where joists or duct work would normally prevent recessed installation
- Damp location rated for soffit applications
- Install J-Box in ceiling beam, and insert light right into drywall opening

## DIMMING

Triac dimmable down to 5%. Compatible with most major brands of dimmers.

## LISTING


ETL Listed, Energy Star Listed, RoHS

## TECHNICAL SPECIFICATION

WATTAGE	8W
CCT	2700K/3000K/3500K/4000K/5000K
CRI	90
DIMMING	Triac dimming
BEAM ANGLE	110°
VOLTAGE	120V, 50/60 Hz
BEAM ANGLE	100°
POWER FACTOR	>0.9
RATING	Suitable for damp locations
WARRANTY	5 year limited (Standard)



## DIMENSION

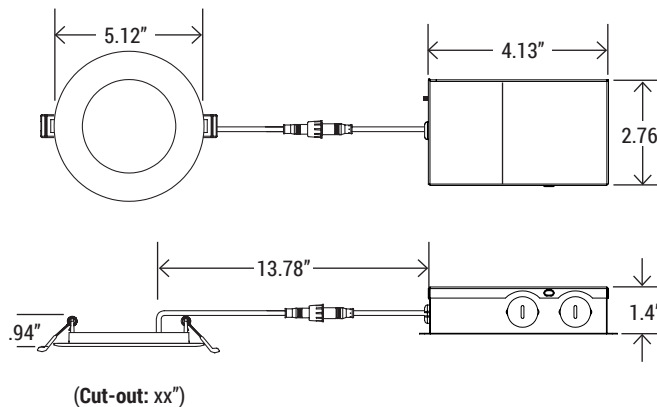






Net Weight	.5 lb
Gross Weight	1 lb

Catalog Number:	Project Name:	Note:	Date:	Type:
-----------------	---------------	-------	-------	-------

**ORDERING SAMPLE: PT-DLS-R-4I-8-5CCT-3**

PT-DLS	-	R	-	4I	-	8	-	5CCT	-	3	-
Fixture											
Series	Shape	Size	Max Wattage	CCT	Generation						
PT-DLS	R (Round)	4I (4" Aperture)	8 (Wattage)	5CCT (27K/30K/35K/40K/50K)	3 (3rd Generation)						

Control/Sensor <sup>3</sup>	Add-On <sup>3</sup>	Mounting <sup>3</sup>	Other Option <sup>3</sup>
TEELIO <sup>1</sup>	EM Battery	Trim Ring Replacement	Warranty
__ Blank  <b>PT-BTC-PHA</b> Bluetooth Phase Controller	__ Blank  <b>PT-EMA-25W</b> Low Output Voltage EM Battery Pack (Remote installation)	__ Blank  <b>RP-DLS-R-4I</b> 4" Slim LED Rough Plate  <b>RP-UNI-R-46</b> 4"/6" Universal Slim LED Rough Plate  <b>UNI-DLS-R</b> 4"/6" Universal Slim LED Housing for new Construction	__ Blank (5 year standard) <b>7YR</b> 7-year Limited Warranty <b>10YR</b> 10-year Limited Warranty

**COMPATIBLE DIMMERS**

LUTRON	LEVITON	LEGRAND
• CT-600P • DVLC-153P • MSCL-OP153M • PD-6WCL • MACL-153M/MA-R • TG-600PR-WH • S-600PR-WH	• CTCL-153PDH-WH • TGCL-153PH-LA • SLV-600P-AL • DV-600PR-WH • SCL-153PH-WH	• RNL06 • 6672 • 6674 • IPL06 • DLS06 • SELV-300P-WH • VP106-1LZ • ADTP70TU

**<sup>1</sup> DOWNLOAD THE TEELIO APP**




**<sup>3</sup> SOLD SEPARATELY**

Catalog Number:	Project Name:	Note:	Date:	Type:
-----------------	---------------	-------	-------	-------

LUMEN PACKAGES

(Delivered lumens are based on the actual IES results)

CATALOG NUMBER	WATTAGE	CCT	DELIVERED LUMENS	EFFICACY (LM/W)
<div><div>PT-DLS-R-4I-8W-5CCT-3</div></div>	8W	2700K	579	73
		3000K	602	77
		3500K	616	80
		4000K	612	79
		5000K	592	75

WHAT'S IN THE BOX?

• Fixture

• Installation sheet

QTY/CARTON

1

PIECES

Catalog Number:	Project Name:	Note:	Date:	Type:
-----------------	---------------	-------	-------	-------

No can or housing needed! Install directly into ceilings with 2" clearance. Portor's slim round profile residential downlights are taking the market by storm! Available in 6" and featuring color tunable technology that lets the user choose between 2700K, 3000K, 3500K, 4000K, or 5000K.

Ideal for soffits, drop ceilings, closets, attics, hallways, bathrooms, kitchens, basements, entry ways, porches (covered ceiling only), garages, stairwells, corridors, nursing/retirement homes, condos, elevators, apartments, and any other small areas with limited space.



### FEATURES

- Edge-lit technology, with no glare or dark spots
- Instant-on
- Ultra slim design, 1" thickness
- Integrated LED fixtures
- LED technology fits anywhere you need general light source
- IC rated for direct contact with insulation
- Perfect solution where joists or duct work would normally prevent recessed installation
- Damp location rated for soffit applications
- Install J-Box in ceiling beam, and insert light right into drywall opening

### DIMMING

Triac dimmable down to 5%. Compatible with most major brands of dimmers.

### LISTING


ETL Listed, Energy Star Listed, RoHS

### TECHNICAL SPECIFICATION

WATTAGE	12W
CCT	2700K/3000K/3500K/4000K/5000K
CRI	90
DIMMING	Triac dimming
BEAM ANGLE	110°
VOLTAGE	120V, 50/60 Hz
BEAM ANGLE	100°
POWER FACTOR	>0.9
RATING	Suitable for damp locations
WARRANTY	5 year limited (Standard)



### DIMENSION

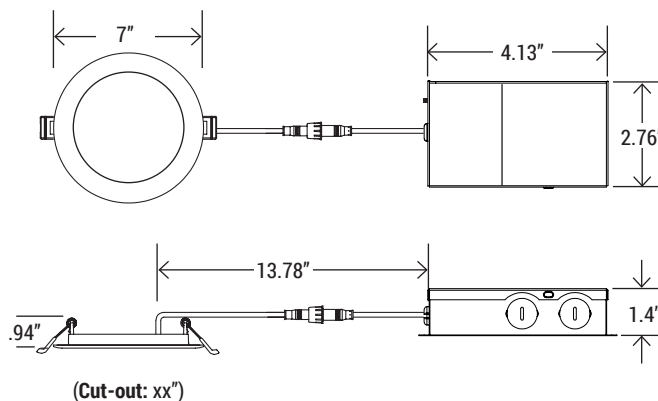






Net Weight	.5 lb
Gross Weight	1 lb

Catalog Number:	Project Name:	Note:	Date:	Type:
-----------------	---------------	-------	-------	-------

### ORDERING SAMPLE: PT-DLS-R-6I-12-5CCT-3

PT-DLS	-	R	-	6I	-	12W	-	5CCT	-	3	-
Fixture											
Series	Shape	Size	Max Wattage	CCT	Generation						
PT-DLS	R (Round)	6I (6" Aperture)	12W (Wattage)	5CCT (27K/30K/35K/40K/50K)	3 (3rd Generation)						

Control/Sensor <sup>3</sup>	Add-On <sup>3</sup>	Mounting <sup>3</sup>	Other Option <sup>3</sup>
TEELIO <sup>1</sup>	EM Battery	Trim Ring Replacement	Warranty
__ Blank  <b>PT-BTC-PHA</b> Bluetooth Phase Controller	__ Blank  <b>PT-EMA-25W</b> Low Output Voltage EM Battery Pack (Remote installation)	__ Blank  <b>RP-DLS-R-6I</b> 6" Slim LED Rough Plate  <b>RP-UNI-R-46</b> 4"/6" Universal Slim LED Rough Plate  <b>UNI-DLS-R</b> 4"/6" Universal Slim LED Housing for new Construction	__ Blank (5 year standard) <b>7YR</b> 7-year Limited Warranty <b>10YR</b> 10-year Limited Warranty

### COMPATIBLE DIMMERS

LUTRON	LEVITON	LEGRAND
• CT-600P • DVLC-153P • MSCL-OP153M • PD-6WCL • MACL-153M/MA-R • TG-600PR-WH • S-600PR-WH	• CTCL-153PDH-WH • TGCL-153PH-LA • SLV-600P-AL • DV-600PR-WH • SCL-153PH-WH	• RNL06 • 6672 • 6674 • IPL06 • DLS06 • SELV-300P-WH • VP106-1LZ • ADTP70TU

### <sup>1</sup> DOWNLOAD THE TEELIO APP




<sup>3</sup> SOLD SEPARATELY

Catalog Number:	Project Name:	Note:	Date:	Type:
-----------------	---------------	-------	-------	-------

LUMEN PACKAGES

(Delivered lumens are based on the actual IES results)

CATALOG NUMBER	WATTAGE	CCT	DELIVERED LUMENS	EFFICACY (LM/W)
<div><div>PT-DLS-R-6I-12W-5CCT-3</div></div>	12W	2700K	996	83
		3000K	1,016	85
		3500K	1,046	89
		4000K	1,039	87
		5000K	1,011	85

WHAT'S IN THE BOX?

• Fixture

• Installation sheet

QTY/CARTON

1

PIECES