

| | | | | |
|-----------------|---------------|-------|-------|-------|
| Catalog Number: | Project Name: | Note: | Date: | Type: |
|-----------------|---------------|-------|-------|-------|

No can or housing needed! Install directly into ceilings with 2" clearance. Portor's slim round profile residential downlights are taking the market by storm! Available in 4" and 6" featuring color tunable technology that lets the user choose between 2700K, 3000K, 3500K, 4000K, or 5000K.

Ideal for soffits, drop ceilings, closets, attics, hallways, bathrooms, kitchens, basements, entry ways, porches (covered ceiling only), garages, stairwells, corridors, nursing/retirement homes, condos, elevators, apartments, and any other small areas with limited space.



FEATURES

- Edge-lit technology, with no glare or dark spots
- Instant-on
- Ultra slim design, 1" thickness
- Integrated LED fixtures
- LED technology fits anywhere you need general light source
- IC rated for direct contact with insulation
- Perfect solution where joists or duct work would normally prevent recessed installation
- Damp location rated for soffit applications
- Install J-Box in ceiling beam, and insert light right into drywall opening

DIMMING

0-10V Dimming. Compatible with most major brands of dimmers.

LISTING


ETL Listed, Energy Star Listed, RoHS

TECHNICAL SPECIFICATION

| | |
|--------------|-------------------------------|
| WATTAGE | 8W |
| CCT | 2700K/3000K/3500K/4000K/5000K |
| CRI | 90 |
| DIMMING | 0-10V dimming |
| VOLTAGE | 120-277V, 50/60 Hz |
| POWER FACTOR | >0.9 |
| RATING | Suitable for damp locations |
| WARRANTY | 5 year limited (Standard) |



DIMENSION

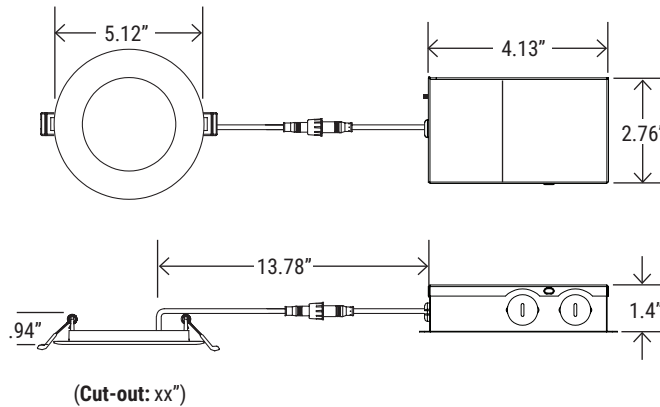




| | |
|--------------|-------|
| Net Weight | .5 lb |
| Gross Weight | 1 lb |

| | | | | |
|-----------------|---------------|-------|-------|-------|
| Catalog Number: | Project Name: | Note: | Date: | Type: |
|-----------------|---------------|-------|-------|-------|

ORDERING SAMPLE: PT-DLS-R-4I-8-5CCT-277-3

| PT-DLS | R | 4I | 8 | 5CCT | 277 | 3 |
|---------------|------------------|-------------------------|--------------------|--------------------------------------|--------------------------|---------------------------|
| Fixture | | | | | | |
| Series | Shape | Size | Max Wattage | CCT | Voltage | Generation |
| PT-DLS | R (Round) | 4I (4" Aperture) | 8 (Wattage) | 5CCT (27K/30K/35K/40K/50K) | 277 (120-277V) | 3 (3rd Generation) |

| | | | |
|--|---|---|---|
| Control/Sensor³ TEELIO ¹ | Add-On³ EM Battery | Mounting³ Trim Ring Replacement | Other Option³ Warranty |
| <p>__ Blank</p>  <p>PT-BTC-6 Bluetooth Fixture Controller</p> | <p>__ Blank</p>  <p>PT-EMA-8W 8W AC EM Battery Pack</p> | <p>__ Blank</p>  <p>RP-DLS-R-4I 4" Slim LED Rough Plate</p> " Universal Slim LED Rough Plate" data-bbox="525 540 655 590"/> <p>RP-UNI-R-46 4"/6" Universal Slim LED Rough Plate</p> " Universal Slim LED Housing for new Construction" data-bbox="525 625 665 680"/> <p>UNI-DLS-R 4"/6" Universal Slim LED Housing for new Construction</p> | <p>__ Blank (5 year standard)</p> <p>7YR 7-year Limited Warranty</p> <p>10YR 10-year Limited Warranty</p> |

¹ DOWNLOAD THE TEELIO APP




³ SOLD SEPARATELY

| | | | | |
|-----------------|---------------|-------|-------|-------|
| Catalog Number: | Project Name: | Note: | Date: | Type: |
|-----------------|---------------|-------|-------|-------|

LUMEN PACKAGES

(Delivered lumens are based on the actual IES results)

| CATALOG NUMBER | WATTAGE | CCT | DELIVERED LUMENS | EFFICACY (LM/W) |
|---|---------|-------|------------------|-----------------|
|  PT-DLS-R-4I-8W-5CCT-277-3 | 8W | 2700K | 579 | 73 |
| | | 3000K | 602 | 77 |
| | | 3500K | 616 | 80 |
| | | 4000K | 612 | 79 |
| | | 5000K | 592 | 75 |

QTY/CARTON

WHAT'S IN THE BOX?

- Fixture
- Installation sheet

1
PIECES