


Catalog Number:	Project Name:	Note:	Date:	Type:
-----------------	---------------	-------	-------	-------

No can or housing needed! Install directly into ceilings with 2" clearance. Portor's slim round profile residential downlights are taking the market by storm! Available in 6" and featuring color tunable technology that lets the user choose between 2700K, 3000K, 3500K, 4000K, or 5000K.

Ideal for soffits, drop ceilings, closets, attics, hallways, bathrooms, kitchens, basements, entry ways, porches (covered ceiling only), garages, stairwells, corridors, nursing/retirement homes, condos, elevators, apartments, and any other small areas with limited space.

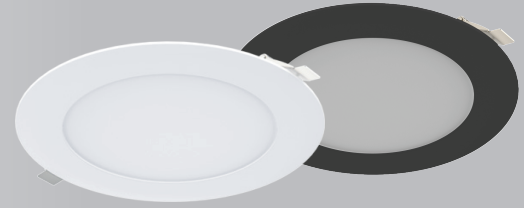

FEATURES

- Edge-lit technology, with no glare or dark spots
- Instant-on
- Ultra slim design, 1" thickness
- Integrated LED fixtures
- LED technology fits anywhere you need general light source
- IC rated for direct contact with insulation
- Perfect solution where joists or duct work would normally prevent recessed installation
- Damp location rated for soffit applications
- Install J-Box in ceiling beam, and insert light right into drywall opening

DIMMING

Triac dimmable down to 5%. Compatible with most major brands of dimmers.

LISTING


ETL Listed, Energy Star Listed, RoHS

TECHNICAL SPECIFICATION

WATTAGE	12W
CCT	2700K/3000K/3500K/4000K/5000K
CRI	90
DIMMING	Triac dimming
BEAM ANGLE	110°
VOLTAGE	120V, 50/60 Hz
BEAM ANGLE	100°
POWER FACTOR	>0.9
RATING	Suitable for damp locations
WARRANTY	5 year limited (Standard)



DIMENSION

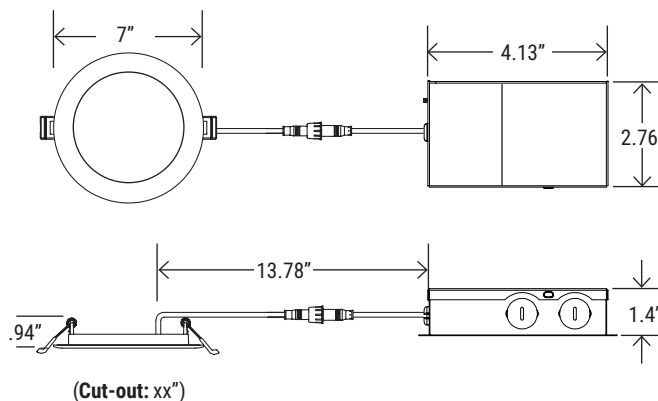




Net Weight	.5 lb
Gross Weight	1 lb

Catalog Number:	Project Name:	Note:	Date:	Type:
-----------------	---------------	-------	-------	-------

ORDERING SAMPLE: PT-DLS-R-6I-12-5CCT-3

PT-DLS	-	R	-	6I	-	12W	-	5CCT	-	3	-	
Fixture												
Series	Shape	Size	Max Wattage	CCT	Generation	Color						
PT-DLS	R (Round)	6I (6" Aperture)	12W (Wattage)	5CCT (27K/30K/35K/40K/50K)	3 (3rd Generation)	<div><div>_Blank (White)</div><div>BK (Black)</div></div>						

Control/Sensor ³	Add-On ³	Mounting ³	Other Option ³
TEELIO ¹	EM Battery	Trim Ring Replacement	Warranty
Blank	Blank	Blank	Blank (5 year standard)
			" Universal Slim LED Rough Plate" data-bbox="526 541 661 591"/>
PT-BTC-PHA Bluetooth Phase Controller	PT-EMA-25W Low Output Voltage EM Battery Pack (Remote installation)	RP-DLS-R-6I 6" Slim LED Rough Plate	RP-UNI-R-46 4"/6" Universal Slim LED Rough Plate
		" Universal Slim LED Housing" data-bbox="526 626 666 681"/>	
		UNI-DLS-R 4"/6" Universal Slim LED Housing for new Construction	

COMPATIBLE DIMMERS

LUTRON	LEVITON	LEGRAND
<ul style="list-style-type: none"> CT-600P DVLC-153P MSCL-OP153M PD-6WCL MACL-153M/MA-R TG-600PR-WH S-600PR-WH 	<ul style="list-style-type: none"> CTCL-153PDH-WH TGCL-153PH-LA SLV-600P-AL DV-600PR-WH SCL-153PH-WH 	<ul style="list-style-type: none"> RNL06 6672 6674 IPL06 DLS06 SELV-300P-WH VP106-1LZ

¹DOWNLOAD THE TEELIO APP




³ SOLD SEPARATELY

Catalog Number:	Project Name:	Note:	Date:	Type:
-----------------	---------------	-------	-------	-------

LUMEN PACKAGES

(Delivered lumens are based on the actual IES results)

CATALOG NUMBER	WATTAGE	CCT	DELIVERED LUMENS	EFFICACY (LM/W)
<div><div>PT-DLS-R-6I-12W-5CCT-3</div></div>	12W	2700K	996	83
		3000K	1,016	85
		3500K	1,046	89
		4000K	1,039	87
		5000K	1,011	85

WHAT'S IN THE BOX?

• Fixture

• Installation sheet

QTY/CARTON

1

PIECES