

Catalog Number:	Project Name:	Note:	Date:	Type:
-----------------	---------------	-------	-------	-------

The third generation slim baffle. Install directly into ceilings with 2" clearance.
Portor's slim baffle profile residential downlights are taking the market by storm!
Available in 4" and featuring color tunable technology that lets the user choose between 2700K, 3000K, 3500K, 4000K, or 5000K.

Ideal for soffits, drop ceilings, closets, attics, hallways, bathrooms, kitchens, basements, entry ways, porches (covered ceiling only), garages, stairwells, corridors, nursing/ retirement homes, condos, elevators, apartments, and any other small areas with limited space



Baffle

CONSTRUCTION

Slim design. IC rated for direct contact with insulation, Wet location rated.

OPTICS

Edge-lit technology, with no glare or dark spots

ELECTRICAL

Luminaire is built with the highest quality driver that is Universal Voltage (120V), Triac dimmable down to 100%-10%.

MOUNTING

Easy to install on standard J-box.

CONTROLS

Compatible with most major brands of dimmers..

LISTING


ETL Listed, FCC, RoHS, CE & Energy Star Listed

TECHNICAL SPECIFICATION

CCT	2700K / 3000K / 3500K / 4000K / 5000K
CRI	90
DIMMING	Triac dimming
VOLTAGE	120V
POWER FREQUENCY	60 Hz
BEAM ANGLE	120°
POWER FACTOR	>0.9
THD	≤20%
WORKING TEMPERATURE	14°F ~ 122°F (-10°C ~ 50°C)
IP RATING	Wet Location
WARRANTY	5 year limited (Standard)




DIMENSION

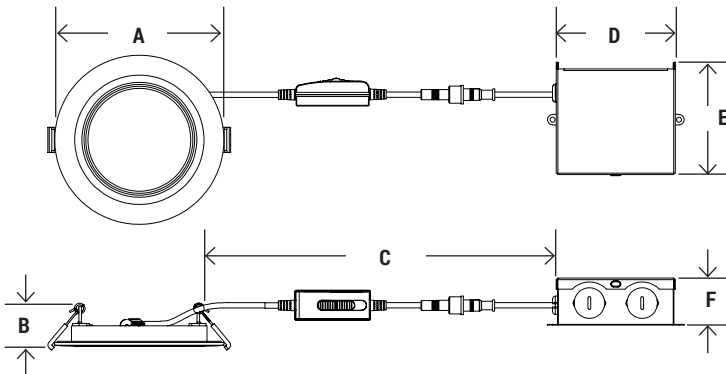


CATALOG NO.	PT-DLSB-R-4I-9W-5CCT-3	PT-DLSB-R-6I-12W-5CCT-3
A	4.92"	6.89"
B	1.38"	1.78"
C	13.78"	13.78"
D	4.13"	4.13"
E	2.75"	2.75"
F	1.38"	1.78"


Catalog Number:	Project Name:	Note:	Date:	Type:
-----------------	---------------	-------	-------	-------

ORDERING SAMPLE: PT-DLSB-R-4I-9W-5CCT-3-EM

PT-DLSB-R	4I	9W	5CCT	3	EM
Fixture					
Series	Size	Wattage	CCT	Series	EM
PT-DLSB-R	4I (4" DIA.)	9W (9W)	5CCT (2700K / 3000K / 3500K / 4000K / 5000K)	3 Generation	_BLANK  PT-EMA-25W 25w Ac Output Emergency Battery
	6I (6" DIA.)	12W (12W)			

LUMEN PACKAGES

CATALOG NUMBER	WATTAGE	CCT	DELIVERED LUMENS	EFFICACY (LM/W)
 PT-DLSB-R-4I-9W-5CCT-3	9W	2700K	747	83 LpW
		3000K	756	84 LpW
		3500K	774	86 LpW
		4000K	783	87 LpW
		5000K	774	86 LpW

CATALOG NUMBER	WATTAGE	CCT	DELIVERED LUMENS	EFFICACY (LM/W)
 PT-DLSB-R-6I-12W-5CCT-3	12W	2700K	996	83 LpW
		3000K	1,008	84 LpW
		3500K	1,032	86 LpW
		4000K	1,044	87 LpW
		5000K	1,032	86 LpW

QTY/CARTON

WHAT'S IN THE BOX?

- Fixture
- Installation sheet

1
PIECES