

Catalog Number:	Project Name:	Note:	Date:	Type:
-----------------	---------------	-------	-------	-------

Portor's surface mounted downlights are an ideal solution when recessed fixtures are not an option. Available in multiple apertures, the DLSM-3 Series features color tunable technology that lets the user choose between 2700K, 3000K, 3500K, 4000K, or 5000K.

Ideal for drop ceilings, closets, attics, hallways, bathrooms, kitchens, basements, entry ways, porches (covered ceiling only), garages, stairwells, corridors, nursing/retirement homes, condos, elevators, apartments, and any other small areas with limited space.



**CONSTRUCTION**

Slim design. IC rated for direct contact with insulation, Damp location rated.

**OPTICS**

Edge-lit technology, with no glare or dark spots

**ELECTRICAL**

Luminaire is built with the highest quality driver that is Universal Voltage (120V), Triac dimmable down to 100%-10%.

**MOUNTING**

Easy to install on standard J-box.

**CONTROLS**

Compatible with most major brands of dimmers..

**LISTING**

ETL Listed, FCC, RoHS, CE & Energy Star Listed

**LIFESPAN**


L70 Rated for 150,000 hours

**TECHNICAL SPECIFICATION**

CCT	2700K / 3000K / 3500K / 4000K / 5000K
CRI	90
DIMMING	Triac dimming
VOLTAGE	120V
POWER FREQUENCY	60 Hz
BEAM ANGLE	120°
POWER FACTOR	>0.9
THD	≤20%
WORKING TEMPERATURE	14°F ~ 122°F (-10°C ~ 50°C)
IP RATING	Damp Location
WARRANTY	5 year limited (Standard)



**DIMENSION**

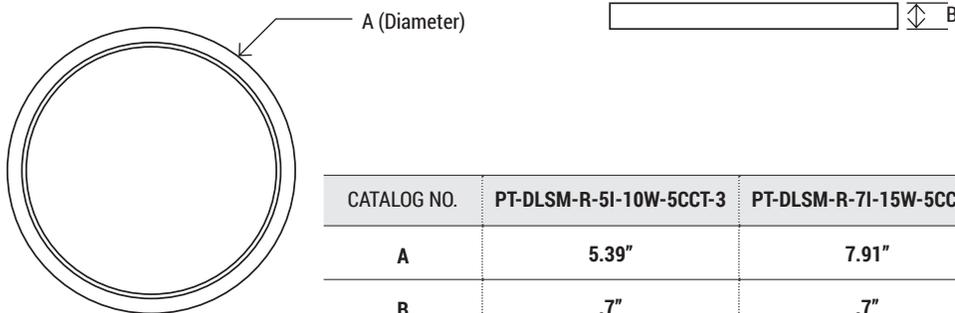

CATALOG NO.	PT-DLSM-R-5I-10W-5CCT-3	PT-DLSM-R-7I-15W-5CCT-3	PT-DLSM-R-9I-18W-5CCT-3	PT-DLSM-R-12I-22W-5CCT-3
<b>A</b>	<b>5.39"</b>	<b>7.91"</b>	<b>8.97"</b>	<b>12.04"</b>
<b>B</b>	<b>.7"</b>	<b>.7"</b>	<b>.7"</b>	<b>.98"</b>

Catalog Number:	Project Name:	Note:	Date:	Type:
-----------------	---------------	-------	-------	-------

**ORDERING SAMPLE: PT-DLSM-R-7I-15W-5CCT-3**

**PT-DLSM-R** - **7I** - **15W** - **5CCT** - **3**

Fixture				
Series	Size	Wattage	CCT	Series
<b>PT-DLSM-R</b>	<b>5I</b> (5" DIA.)	<b>10W</b> (10W)	<b>5CCT</b> (2700K / 3000K / 3500K / 4000K / 5000K)	<b>3</b> Generation
	<b>7I</b> (7" DIA.)	<b>15W</b> (15W)		
	<b>9I</b> (9" DIA.)	<b>18W</b> (18W)		
	<b>12I</b> (12" DIA.)	<b>24W</b> (24W)		

Catalog Number:	Project Name:	Note:	Date:	Type:
-----------------	---------------	-------	-------	-------

**LUMEN PACKAGES**

(Delivered lumens are based on the actual IES results)

CATALOG NUMBER	WATTAGE	CCT	DELIVERED LUMENS	EFFICACY (LM/W)
 <b>PT-DLSM-R-5I-10W-5CCT-3</b>	10W	2700K	852	83 LpW
		3000K	867	84 LpW
		3500K	876	86 LpW
		4000K	882	87 LpW
		5000K	877	86 LpW
 <b>PT-DLSM-R-7I-15W-5CCT-3</b>	15W	2700K	1,280	85 LpW
		3000K	1,300	86 LpW
		3500K	1,310	87 LpW
		4000K	1,320	88 LpW
		5000K	1,310	87 LpW
 <b>PT-DLSM-R-9I-18W-5CCT-3</b>	18W	2700K	1,460	81 LpW
		3000K	1,480	82 LpW
		3500K	1,490	82 LpW
		4000K	1,490	82 LpW
		5000K	1,480	82 LpW
 <b>PT-DLSM-R-12I-24W-5CCT-3</b>	24W	2700K	2,141	92 LpW
		3000K	2,159	93 LpW
		3500K	2,182	92 LpW
		4000K	2,193	92 LpW
		5000K	2,186	82 LpW

**WHAT'S IN THE BOX?**

- Fixture
- Installation sheet

QTY/CARTON

**1**  
PIECES