

Catalog Number:	Project Name:	Note:	Date:	Type:
-----------------	---------------	-------	-------	-------

Portor's surface mounted downlights are an ideal solution when recessed fixtures are not an option. Available in multiple apertures, the DLSM2 Series features color tunable technology that lets the user choose between 2700K, 3000K, 3500K, 4000K, or 5000K.

Ideal for drop ceilings, closets, attics, hallways, bathrooms, kitchens, basements, entry ways, porches (covered ceiling only), garages, stairwells, corridors, nursing/retirement homes, condos, elevators, apartments, and any other small areas with limited space.



CONSTRUCTION

Slim design. IC rated for direct contact with insulation, Damp location rated.

OPTICS

Edge-lit technology, with no glare or dark spots

ELECTRICAL

Luminaire is built with the highest quality driver that is Universal Voltage (120V), Triac dimmable down to 100%-10%.

MOUNTING

Easy to install on standard J-box.

CONTROLS

Compatible with most major brands of dimmers..

LISTING

ETL Listed, FCC, RoHS, CE & Energy Star Listed

LIFESPAN


L70 Rated for 150,000 hours

TECHNICAL SPECIFICATION

CCT	2700K / 3000K / 3500K / 4000K / 5000K
CRI	90
DIMMING	Triac dimming
VOLTAGE	120V
POWER FREQUENCY	60 Hz
BEAM ANGLE	120°
POWER FACTOR	>0.9
THD	≤20%
WORKING TEMPERATURE	14°F ~ 122°F (-10°C ~ 50°C)
IP RATING	Damp Location
WARRANTY	5 year limited (Standard)



DIMENSION

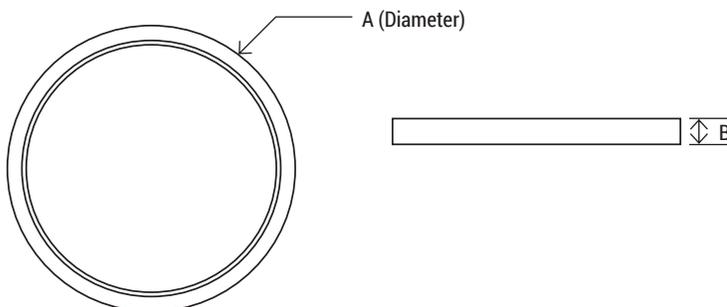

CATALOG NO.	PT-DLSM2-R-7I-15W-5CCT
A	7.5"
B	.5"

Catalog Number:	Project Name:	Note:	Date:	Type:
-----------------	---------------	-------	-------	-------

ORDERING SAMPLE: PT-DLSM2-R-7I-15W-5CCT-EM-

PT-DLSM2-R	7I	15W	5CCT	EM		
Fixture					Add-On	Other Options
Series	Size	Wattage	CCT	EM	Trims	Warranty
PT-DLSM2-R	7I (7" DIA.)	15W (15W)	5CCT (2700K / 3000K / 3500K / 4000K / 5000K)	EM (EMERGENCY BATTERY)	_ Blank  TRR-SM2-7I-BN Brush Nickel Trim  TRR-SM2-7I-BZ Bronze Trim  TRR-SM2-7I-BK Black Trim	_ Blank 7YR 7 Year Limited Warranty 10YR 10 Year Limited Warranty

LUMEN PACKAGES

(Delivered lumens are based on the actual IES results)

CATALOG NUMBER	WATTAGE	CCT	DELIVERED LUMENS	EFFICACY (LM/W)	DLC ID
 PT-DLSM2-R-7I-15W-5CCT-EM	15W	2700K	901	60.84 LpW	
		3000K	980	65.09 LpW	
		3500K	1063	68.94 LpW	
		4000K	1054	69.16 LpW	
		5000K	966	65.32 LpW	



WHAT'S IN THE BOX?

- Fixture
- Installation sheet

QTY/CARTON

1
PIECES