

Project Name:	Notes:	Date:	Type:
---------------	--------	-------	-------


**DESCRIPTION**

Portor's surface mounted downlights are an ideal solution when recessed fixtures are not an option. Available in multiple apertures, the DLSM2 Series features color tunable technology that lets the user choose between 2700K, 3000K, 3500K, 4000K or 5000K.

Ideal for drop ceilings, closets, attics, hallways, bathrooms, kitchens, basements, entry ways, porches (covered ceiling only), garages, stairwells, corridors, nursing/retirement homes, condos, elevators, apartments, and any other small areas with limited space.



**TUNABLE 5-1 CCT SELECTOR**

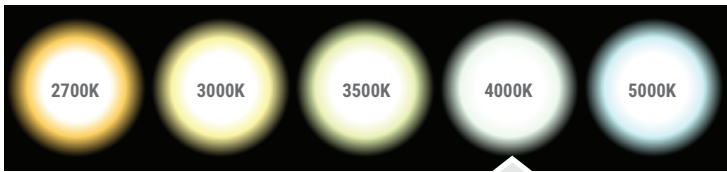

Easily flip the switch for desired CCT. It's that simple!

**FEATURES**

- Edge-lit technology, with no glare or dark spots
- Instant-on
- Slim design
- Integrated LED fixtures
- LED technology fits anywhere you need general light source
- IC rated for direct contact with insulation
- Wet location rated
- Easy to install on standard J-box

**DIMMING**

Triac dimmable down to 100%-10%.  
Compatible with most major brands of dimmers.

**LISTING**

ETL Listed, FCC, RoHS, CE & Energy Star Listed

**TECHNICAL SPECIFICATION**

WATTAGE	15W / 18W / 22W
LUMENS	900 / 1100 / 1400
EFFICACY	up to 63 lm/W
VOLTAGE	120V
POWER FREQUENCY	50/60 Hz
CCT	2700K / 3000K / 3500K / 4000K / 5000K
CRI	90
BEAM ANGLE	120°
RATING	Suitable for wet locations
DIMMABLE	Triac dimming
POWER FACTOR	>0.9
WARRANTY	5 year limited





MODEL#	WATTS	LUMENS	LM/WATT	CCT	CRI	VOLTAGE
<b>PT-DLSM2-S-7I-15W-5CCT</b>	15W	1012	60	2700K / 3000K / 3500K / 4000K / 5000K	90	120V
<b>PT-DLSM2-S-9I-18W-5CCT</b>	18W	1296	61			
<b>PT-DLSM2-S-12I-22W-5CCT</b>	22W	1492	63			

Project Name:

Notes:

Date:

Type:

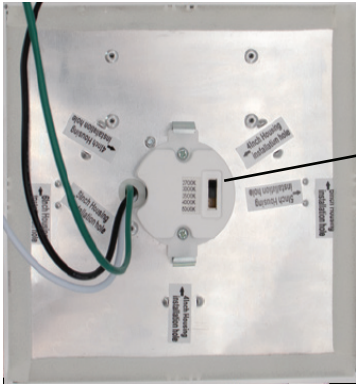

Easily flip the switch for desired CCT

**AVAILABLE TRIM OPTIONS (Sold separately):**



Black





Bronze



Brush Nickel

**TRIMS AVAILABLE ON 7", 9" and 12" MODELS**

**DIMENSION**



MODEL#	A	B	C
<b>PT-DLSM2-S-7I</b>	6.3"	6.3"	.67"
<b>PT-DLSM2-S-9I</b>	9"	9"	.67"
<b>PT-DLSM2-S-12I</b>	12"	12"	1"

**RECOMMENDED DIMMER**

**LUTRON**

- PVCL-153P
- CTCL-153P

**LEVITON**

- 6681
- 6672

**MOUNTING OPTION**

The junction boxes listed below are meant to be a reference list only. Junction box sizes may vary. It is the responsibility of the individual performing the installation to confirm that the fixture can properly and safely work with any junction box.



3-1/2" octagon/steel box



4" octagon/steel box



3-1/2" round/plastic box



4" round/plastic box



4" round/plastic box with bar hanger assembly

(For through circuit wiring applications, recommended j-box size is 2-1/8" deep)