PT-EML-R-EXT

Exterior Rated Round Emergency Light

Catalog Number:	Project Name:	Note:	Date:	Type:

The PT-EML-R-EXT features durable thermoplastic construction with dual adjustable LED lamp heads delivering more than 400 lumens. Its built-in Ni-Cd battery provides a minimum 90 minutes of emergency operation, while 120V/277V dual-voltage support and universal J-box mounting allow for flexible wall or ceiling installation. Wet Location rated for dependable performance in demanding applications.



CONSTRUCTION
Injection-molded thermoplastic ABS housing and polycarbonate cover, UL 94V-0 flame rating.

OPTICS
2 × 12 pcs ultra-bright 2835 0.5W LED lamp heads

ELECTRICAL
120V/277VAC dual voltage operation. Built-in 3.6V 2000mAh Nickel-Cadmium (Ni-Cd) battery.


MOUNTING
The universal J-Box mounting pattern supports quick installation time. Mount directly on a wall or ceiling.

LISTING
UL Listed, RoHS

TECHNICAL SPECIFICATION

INPUT WATT	2.4W
LUMENS	400 lm
VOLTAGE	120V/277VAC dual voltage
BATTERY TYPE	3.6V 2000MAH NICKEL-CADMIUM
EM RUN TIME	90 MINS
CHARGING TIME	24 hrs
WORKING TEMPERATURE	32°F to 104°F
IP RATING	Wet Location

DIMENSION

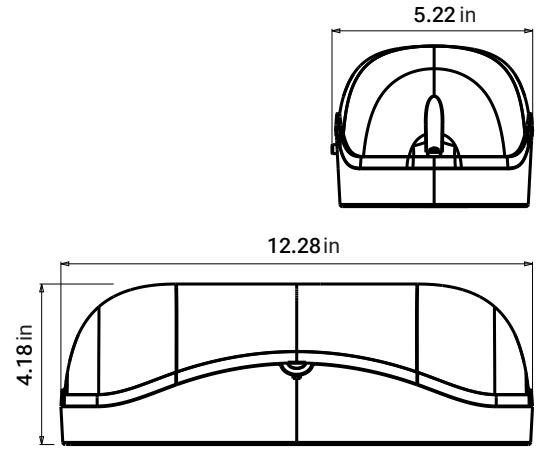

ORDERING SAMPLE: **PT-EML-R-EXT**

SERIES	STYLE/SHAPE	FINISH	MOUNTING
PT-EML Exit and Emergency	**R** (Round LED Lamp)	White	Universal mounting (Ceiling, Wall, Side)