


Catalog Number:	Project Name:	Note:	Date:	Type:
-----------------	---------------	-------	-------	-------

The PT-EXL-C-R Series is the category leader in emergency lighting featuring adjustable, dual head lights, 90-minute power outage uptime, backlit red chevrons (single or double), and a polycarbonate housing that is universally mountable. The EXL-C series is UL924, UL damp location, NFPA 101, NEC/OSHA, Title 20 compliant and adheres to the majority of state and local codes for indoor exit and emergency lighting solutions.

Ideal use for commercial buildings, industrial facilities, entryways, stairways, and hallways.



Simply flip the switch for Bi-Color  
**RED** or **Green** LED's

#### CONSTRUCTION

Market standard mold consisting of thermoplastic ABS housing with UL 94V-0 flame rating. Field adjustable for single or dual face in red or green color inserts. Internal switch for selection of bi-color red/green LEDs. 2 x 1W SMT LED lamp heads for emergency mode.

#### ELECTRICAL

Dual voltage operation with 120V/277VAC and input watt of 2W. Includes built-in 3.6V1000mAh Ni-MH battery with a 90-minute runtime and 24 hour charge time. Test switch and charge indicator.

#### MOUNTING

The universal J-Box mounting pattern supports quick installation time. Mount directly on a wall or ceiling.

#### ENERGY SAVINGS

LED emergency lights may reduce energy consumption up to 85% and lower overall maintenance costs.

#### LISTING

UL Listed, RoHS


#### WARRANTY

5 year limited warranty on electrical parts and housing. 3 year limited warranty on battery.

#### TECHNICAL SPECIFICATION

INPUT WATT	2W
LUMENS	200 lm
VOLTAGE	Dual Voltage 120V-277V
BATTERY TYPE	3.6V1000mAh Ni-MH
EM RUN TIME	90 mins
CHARGING TIME	24 hrs
WORKING TEMPERATURE	32°F ~ 104°F
IP RATING	Indoor Damp Location

#### DIMENSION

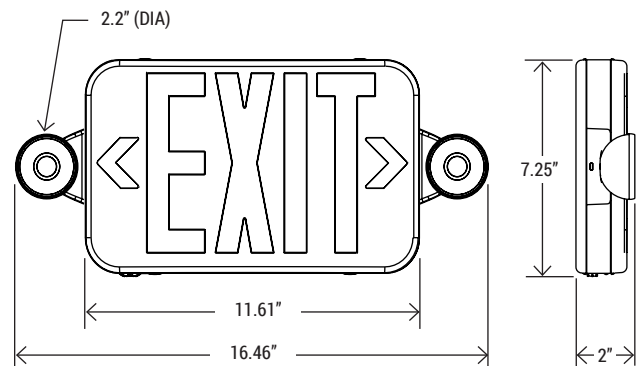


#### ORDERING SAMPLE: PT-EXL-C-R

Series	Style/Shape	No. of Face	Finish	Mounting
<b>PT-EXL-C</b> Exit and Emergency Lighting Combo	<b>R</b> (Round LED Lamp)	Single or double face (universal)	White	Universal mounting (Ceiling, Wall)

Catalog Number:	Project Name:	Note:	Date:	Type:
-----------------	---------------	-------	-------	-------

The PT-EXL-C-S-RC Series is the category leader in emergency lighting featuring adjustable, dual head lights, 90-minute power outage uptime, backlit red chevrons (single or double), and a polycarbonate housing that is universally mountable. The EXL-C series is UL924, UL damp location, NFPA 101, NEC/OSHA, Title 20 compliant and adheres to the majority of state and local codes for indoor exit and emergency lighting solutions. Remote capability up to 2W.

Ideal use for commercial buildings, industrial facilities, entryways, stairways, and hallways.



**R**  
**G**  
Simply flip the switch for Bi-Color  
**RED** or **Green** LED's

#### CONSTRUCTION

Market standard mold consisting of thermoplastic ABS housing with UL 94V-0 flame rating. Field adjustable for single or dual face in red or green color inserts. Internal switch for selection of bi-color red/green LEDs. 2 x 8pcs ultra bright 2835 SMT LED lamp heads for emergency mode.

#### ELECTRICAL

Dual voltage operation with 120V/277VAC and input watt of 4W. Includes built-in 3.6V 2400mAh Ni-MH battery with a 90-minute runtime and 24 hour charge time. Remote capability up to 2W. Test switch and charge indicator.

#### MOUNTING

The universal J-Box mounting pattern supports quick installation time. Mount directly on a wall or ceiling.

#### LISTING

UL Listed, RoHS


#### WARRANTY

5 year limited warranty on electrical parts and housing. 3 year limited warranty on battery.

#### TECHNICAL SPECIFICATION

INPUT WATT	4W
LUMENS	207 lm
REMOTE CAPABILITY	up to 2W
VOLTAGE	Dual Voltage 120V-277V
BATTERY TYPE	3.6V 2400mAh Ni-MH
EM RUN TIME	90 mins
CHARGING TIME	24 hrs
WORKING TEMPERATURE	32°F ~ 104°F
IP RATING	Indoor Damp Location

#### DIMENSION

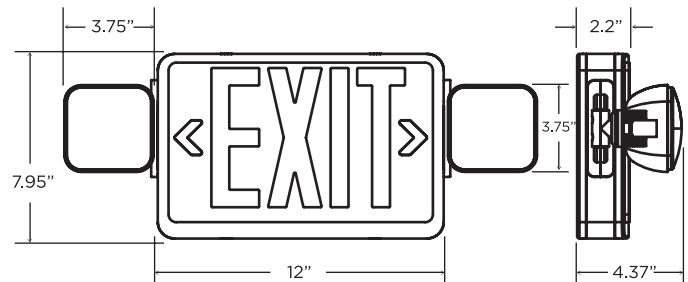


#### ORDERING SAMPLE: PT-EXL-C-S-RC

Series	Style/Shape	Function	Finish	Mounting
<b>PT-EXL-C</b> Exit and Emergency Lighting Combo	<b>S</b> (Square LED Lamp)	<b>RC</b> (Remote capable)	White	Ceiling, Wall

Catalog Number:	Project Name:	Note:	Date:	Type:
-----------------	---------------	-------	-------	-------

The PT-EXL-C SALIDA Series is the category leader in emergency lighting featuring adjustable, dual head lights, 90-minute power outage uptime, backlit red chevrons (single or double), and a polycarbonate housing that is universally mountable. The PT-EXL-C SALIDA adheres to the majority of state and local codes for indoor exit and emergency lighting solutions.

Ideal use for commercial buildings, industrial facilities, entryways, stairways, and hallways.



Simply flip the switch for Bi-Color  
**RED** or **Green** LED's

#### CONSTRUCTION

Market standard mold consisting of thermoplastic ABS housing with UL 94V-0 flame rating. Field adjustable for single or dual face in red or green color inserts. Internal switch for selection of bi-color red/green LEDs. 2 x 12pcs ultra bright 2835 SMT LED lamp heads for emergency mode.

#### ELECTRICAL

Dual voltage operation with 120V/277VAC and input watt of 3.5W. Includes built-in 9.6V1000mAh nickel cadmium battery with a 90-minute runtime and 24 hour charge time.

#### MOUNTING

The universal J-Box mounting pattern supports quick installation time. Mount directly on a wall or ceiling.

#### ENERGY SAVINGS

LED emergency lights may reduce energy consumption up to 85% and lower overall maintenance costs.

#### LISTING

RoHS


#### WARRANTY

5 year limited warranty on electrical parts and housing. 3 year limited warranty on battery.

#### TECHNICAL SPECIFICATION

INPUT WATT	3.5W
LUMENS	207 lm
VOLTAGE	Dual Voltage 120V-277V
BATTERY TYPE	9.6V600mAh Nickel Cadmium
EM RUN TIME	90 mins
CHARGING TIME	24 hrs
WORKING TEMPERATURE	32°F ~ 104°F
IP RATING	Indoor Damp Location

#### DIMENSION

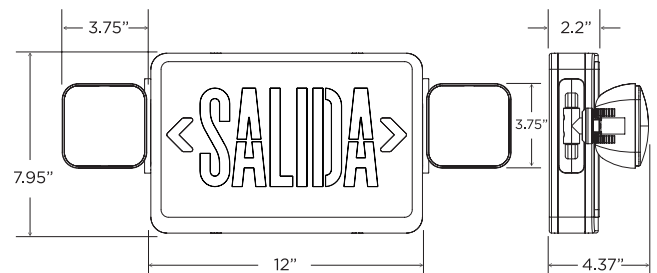



#### ORDERING SAMPLE: PT-EXL-C-S-SAL

Series	Style/Shape	FACE	Finish	Mounting
<b>PT-EXL-C</b> Exit and Emergency Lighting Combo	<b>S</b> (Square LED Lamp)	<b>SAL</b> (Salida)	White	Universal mounting (Ceiling, Wall, Side)

Catalog Number:	Project Name:	Note:	Date:	Type:
-----------------	---------------	-------	-------	-------

The PT-EXL-C Series is the category leader in emergency lighting featuring adjustable, dual head lights, 90-minute power outage uptime, backlit red chevrons (single or double), and a polycarbonate housing that is universally mountable. The EXL-C series is UL924, UL damp location, NFPA 101, NEC/OSHA, Title 20 compliant and adheres to the majority of state and local codes for indoor exit and emergency lighting solutions.

Ideal use for commercial buildings, industrial facilities, entryways, stairways, and hallways.

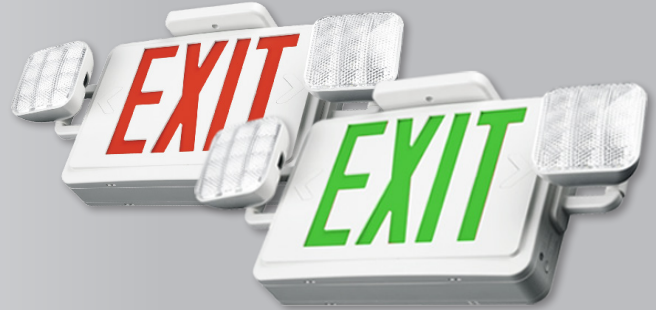

Simply flip the switch for Bi-Color  
**RED** or **Green** LED's

#### CONSTRUCTION

Market standard mold consisting of thermoplastic ABS housing with UL 94V-0 flame rating. Field adjustable for single or dual face in red or green color inserts. Internal switch for selection of bi-color red/green LEDs. 2 x 12pcs ultra bright 2835 SMT LED lamp heads for emergency mode.

#### ELECTRICAL

Dual voltage operation with 120V/277VAC and input watt of 3.5W. Includes built-in 9.6V1000mAh nickel cadmium battery with a 90-minute runtime and 24 hour charge time.

#### MOUNTING

The universal J-Box mounting pattern supports quick installation time. Mount directly on a wall or ceiling.

#### ENERGY SAVINGS

LED emergency lights may reduce energy consumption up to 85% and lower overall maintenance costs.

#### LISTING

UL Listed, RoHS


#### WARRANTY

5 year limited warranty on electrical parts and housing. 3 year limited warranty on battery.

#### TECHNICAL SPECIFICATION

INPUT WATT	3.5W
LUMENS	207 lm
VOLTAGE	Dual Voltage 120V-277V
BATTERY TYPE	9.6V600mAh Nickel Cadmium
EM RUN TIME	90 mins
CHARGING TIME	24 hrs
WORKING TEMPERATURE	32°F ~ 104°F
IP RATING	Indoor Damp Location

#### DIMENSION

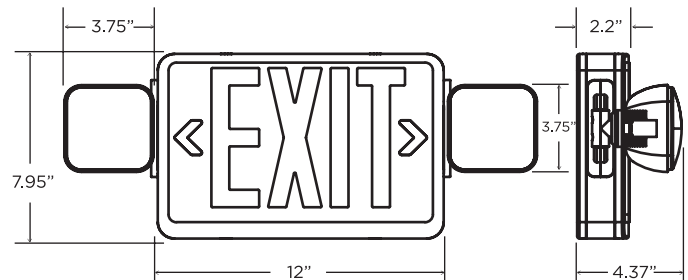

#### ORDERING SAMPLE: PT-EXL-C-S

Series	Style/Shape	Finish	Mounting
<b>PT-EXL-C</b> Exit and Emergency Lighting Combo	<b>S</b> (Square LED Lamp)	White	Universal mounting (Ceiling, Wall, Side)

Catalog Number:	Project Name:	Note:	Date:	Type:
-----------------	---------------	-------	-------	-------

The PT-EXL-C-SLM Series is the category leader in emergency lighting featuring adjustable, dual head lights, 90-minute power outage uptime, backlit red chevrons (single or double), and a polycarbonate housing that is universally mountable. The EXL-C series is UL924, UL damp location, NFPA 101, NEC/OSHA, Title 20 compliant and adheres to the majority of state and local codes for indoor exit and emergency lighting solutions.

Ideal use for commercial buildings, industrial facilities, entryways, stairways, and hallways.



#### CONSTRUCTION

Market standard mold consisting of thermoplastic ABS housing with UL 94V-0 flame rating. Field adjustable for single or dual face in red color only. 3.3W LED lamp heads for emergency mode.

#### ELECTRICAL

Dual voltage operation with 120V/277VAC and input watt of 3.3W. Includes built-in 3.6V1000mAh Ni-MH battery with a 90-minute runtime and 24 hour charge time. Test switch and charge indicator.

#### MOUNTING

The universal J-Box mounting pattern supports quick installation time. Mount directly on a wall or ceiling.

#### ENERGY SAVINGS

LED emergency lights may reduce energy consumption up to 85% and lower overall maintenance costs.

#### LISTING

UL Listed, RoHS


#### WARRANTY

5 year limited warranty on electrical parts and housing.  
3 year limited warranty on battery.

#### TECHNICAL SPECIFICATION

INPUT WATT	3.3W
LUMENS	200 lm
VOLTAGE	Dual Voltage 120V-277V
BATTERY TYPE	3.6V1000mAh Ni-MH
EM RUN TIME	90 mins
CHARGING TIME	24 hrs
WORKING TEMPERATURE	32°F ~ 104°F
IP RATING	Indoor Damp Location

#### DIMENSION

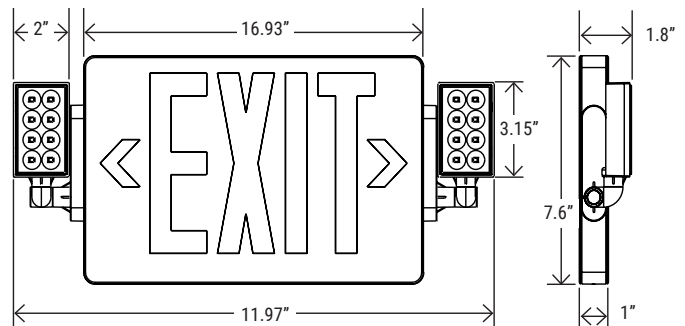

#### ORDERING SAMPLE: PT-EXL-C-SLM

Series	Style/Shape	No. of Face	Finish	Mounting
<b>PT-EXL-C</b> Exit and Emergency Lighting Combo	<b>SLM</b> (SlimLED Lamp)	Single or double face (universal)	White	Universal mounting (Ceiling, Wall)