

| | | | | |
|-----------------|---------------|-------|-------|-------|
| Catalog Number: | Project Name: | Note: | Date: | Type: |
|-----------------|---------------|-------|-------|-------|

This RHBE economically designed round high bay ensures both functionality and versatility, catering to your specific lighting needs with ease. Upgrade your lighting experience with a product that combines innovation, efficiency, and adaptability for a brighter environment.

Premium quality provides excellent solution for high-ceiling mount applications, especially in warehouse, storage, gymnasiums, retail spaces and convention centers.



CONSTRUCTION

Die-cast aluminum heat sink provides superior thermal transfer to extend lifespan of the luminaire. Built rugged to withstand harsh conditions, IP65 rated. Fixture comes standard with O-ring for suspended mounting.

ELECTRICAL

Luminaire is built with the highest quality driver that is Universal Voltage (120-277V), uses long lasting, high-efficient LED packages.

LENS

Clear PC lens.

SENSOR READY

Motion sensor ready (optional).

ENERGY SAVINGS

Over 50% energy savings than traditionally metal halide fixtures, low heat productions requires less maintenance and operation cost.

LISTING

UL Listed, DLC Premium Listed, RoHS, IP65 rated

WARRANTY

5 year Limited Warranty

| WATTAGE | DELIVERED LUMENS | EFFICACY |
|-------------------------|------------------|----------|
| PT-RHBE-150W-50K | 21,900 | 149 lm/W |
| PT-RHBE-240W-50K | 35,040 | 153 lm/W |

Based on 5000K, 80 CRI. Actual lumens may vary.

TECHNICAL SPECIFICATION

| | |
|---------------------|-----------------------|
| CCT | 5000K |
| CRI | 80 |
| DIMMABLE | 0-10V dimmable |
| VOLTAGE | 120V - 277V, 50/60 Hz |
| POWER FACTOR | >0.9 |
| THD | ≤20% |
| WORKING TEMPERATURE | -40°F ~ 122°F |
| STORAGE TEMPERATURE | -40°F ~ 176°F |
| IP RATING | IP65 Wet Location |
| FINISH COLOR | Black |
| WARRANTY | 5 year limited |




ORDERING SAMPLE:

- - - - - - -

| Series | Wattage | CCT | Voltage | Accessories/Options (Sold separately) | | | |
|--|--|------------|------------------|---------------------------------------|---|--|---|
| PT-RHBE Economy Round High Bay | 150W (10" dia.) 240W (13" dia.) | 50K | Blank (120-277V) | Mounting | EM Battery | Sensor | Wire guard |
| | | | | Blank (Standard J-hook) UB-RHBE | Blank (No option) PT-EMU3-25W PT-EMU3-40W | Blank (No option) MS-UNI2-SP-PR MS-UNI2-SP-MW MSH-RC2 | Blank (No option) WG-RHBE-150 WG-RHBE-240 |

| | | | | |
|-----------------|---------------|-------|-------|-------|
| Catalog Number: | Project Name: | Note: | Date: | Type: |
|-----------------|---------------|-------|-------|-------|

DIMENSION

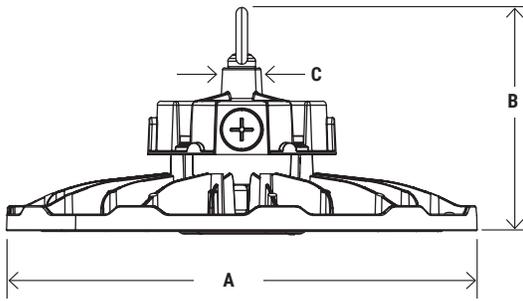

| MODEL# | A | B | C (THREAD SIZE) |
|------------------|--------|------|-----------------|
| PT-RHBE-150W-50K | 10.24" | 6" | .5" |
| PT-RHBE-240W-50K | 13.4" | 6.5" | |

QTY/BOX



MOUNTING OPTION



UB-RHBE
U-Bracket Mounting
for RHBE-150W/240W

WIRE GUARD OPTION



WG-RHBE-150
Wire guard for RHBE-150W



WG-RHBE-240
Wire guard for RHBE-240W

EM BATTERY OPTION



PT-EMU3-25W (150W)
PT-EMU3-40W (240W)
Emergency LED Driver For
Round High Bay

SENSOR OPTION

(Remote control required, no factory
installation required)



MS-UNI2-SP-PR
MS-UNI2-SP-MW
Universal Short Pin
Motion Sensor



MSH-RC2
Remote Control



DLC LISTING

| CATALOG NUMBER | WATTAGE | DELIVERED LUMENS | EFFICACY | DLC PRODUCT ID | CLASSIFICATION |
|------------------|---------|------------------|----------|----------------|----------------|
| PT-RHBE-150W-50K | 150W | 21,900 | 148 lm/W | S-7QG06H | PREMIUM |
| PT-RHBE-150W-50K | 240W | 34,040 | 153 lm/W | S-C49F72 | PREMIUM |