

Catalog Number:	Project Name:	Note:	Date:	Type:
-----------------	---------------	-------	-------	-------

Portor's TRO2 luminaire with field-adjustable, and can be programmed with a CCT of 3500K, 4000K, or 5000K, eliminating the need to stock multiple color temperatures.

Ideal use for office spaces, walkways, schools/campuses, shopping centers, hospitality and health care industry.



SECOND GENERATION



CONSTRUCTION

Constructed of one-piece ribbed unitized housing and corners that interlock, preventing damage to luminaire. All sides and corners are turned in and hemmed, removing sharp edges for safe handling and installation.

ELECTRICAL

Luminaire is built with the highest quality 120-277VAC drivers.

OPTICAL SYSTEM

Designed to reduce glare and improve light distribution through precision formed lens optics.

DIMMING

0-10V dimmable standard

CONTROLS

Option available for dimmers and occupancy sensors (consult factory) to maximize energy savings.

LISTING

UL Listed, RoHS

WARRANTY

5 Years Limited Warranty

WATTAGE	DELIVERED LUMENS	EFFICACY
34W	4,675	up to 145 lm/W
38W	5,208	
45W	61,89	

Based on 4000K setting. Actual lumens may vary.

TECHNICAL SPECIFICATION

CCT	3500K/4000K/5000K
CRI	80
DIMMABLE	0-10V dimmable
BEAM ANGLE	120°
VOLTAGE	120V-277V, 50/60 Hz
POWER FACTOR	>0.9
THD	≤20%
WORKING TEMPERATURE	-40°F ~ 122°F
IP RATING	Suitable for damp locations
WARRANTY	5 year limited





ORDERING SAMPLE: - - - - -

Series	Size	CCT/ Wattage	Accessories/Options		
			Sensor	EM Battery	Control
PT-TRO2 Second Generation Troffer	24 (2' x 4')	3CP (3500K/4000K/5000K) (34W/38W/45W)	MS or blank	EM or blank	A-WN-D01-RF-WH

Catalog Number:	Project Name:	Note:	Date:	Type:
-----------------	---------------	-------	-------	-------

DIMENSION

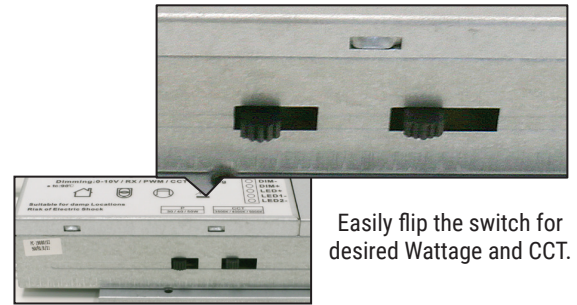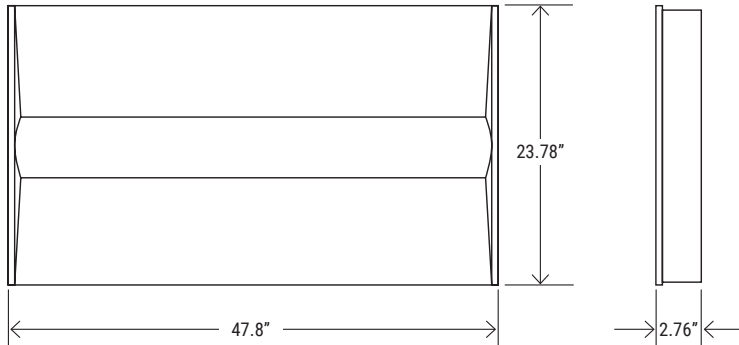

Easily flip the switch for desired Wattage and CCT.



MOTION SENSOR



MS
Motion Sensor

OPTIONS



EM
LED Emergency Driver



A-WN-D01-RF-WH
Athena Wireless (RF) Node



MOUNTING KIT



SMK-TRO-24
2'x4' Troffer Surface Mount Kit



FK-24
2'x4' Flange Kit