

Catalog Number:	Project Name:	Note:	Date:	Type:
-----------------	---------------	-------	-------	-------

Portor's Arc Wraparound series is designed to save energy and meet lost light regress requirements. Our Modern wraparound is wattage adjustable (21W/26W/34W/40W) and color tunable (30K/35K/40K/50K/65K).

Ideal use for offices, hallways, stairwells, bathrooms and conference rooms.



CONSTRUCTION

Modern design wraparound with durable and solid form factor frame. Made out of quality aluminum alloy body with white finish.

OPTICS

Luminaire is built with the highest quality driver that is Universal Voltage (120V-277V), uses long lasting, high-efficient LED package. Frosted lens diffuser reduces glare and improves overall light output.

ELECTRICAL

High performance light output perfect for high ceiling. Optic lens designed to reduce glare and improve light distribution through precision lens optics.

MOUNTING

Comes standard with J-Hooks, a 0.5" screw in hole for pendant mount, and a safety cable. Options available for U-bracket mount.

CONTROLS

Options available for occupancy sensors with daylight harvesting fuction, TEELIO Bluetooth lighting controls, and Lutron AWN.

LISTING

UL Listed, DLC Premium Listed

LIFESPAN


L70 Rated for 100,000 hours

TECHNICAL SPECIFICATION

CCT	3000K/3500K/4000K/5000K/6500K
CRI	80+
DIMMING	1-10V dimming
VOLTAGE	120V - 277V
POWER FREQUENCY	50/60 Hz
CURRENT	1.5A
POWER FACTOR	>0.9
THD	≤10%
WORKING TEMPERATURE	-4°F ~ +104°F
IP RATING	Dry Location
WARRANTY	5 year limited (Standard)



DIMENSION

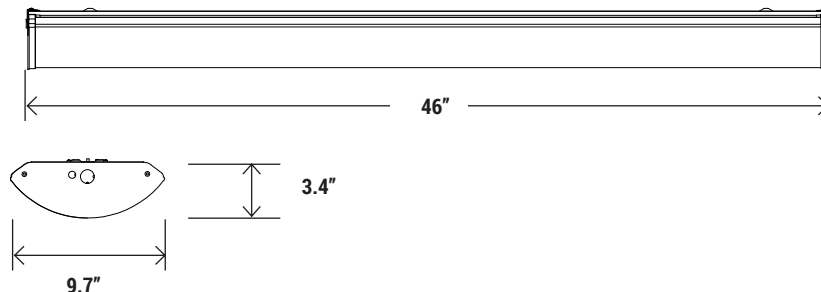

Catalog Number:	Project Name:	Note:	Date:	Type:
-----------------	---------------	-------	-------	-------

ORDERING SAMPLE: PT-WAA-4F10I-40-3CP-2

PT-WAA	-	4F10I	-	40	-	5C4P	-	2	-		-	
Fixture												Controls/Sensors ¹
Series	Size	Max Wattage	CCT	Series	Expansion							Analog Sensors
PT-WAA	4FT (4-Footer)	40W	5C4P (21W/26W/ 34W/40W) (3000K/3500K/4000K /5000K/6500K)	2	__ Blank No Sensor Receptacle SR Sensor Ready Receptacle							__ Blank  PT-MS-4P-PR PIR 4pin Sensor  PT-MS-BT Bluetooth 4pin Sensor

	-	-
Adds-On EM Battery __ Blank  PT-EMD-8W 8W AC Emergency Battery Pack	Mounting Surface Mount Kit __ Blank  SM Surface Mount (Standard) Comes with junction cover	Other Option Warranty __ Blank (5 Year Standard) 7YR 7 Year Limited Warranty 10YR 10 Year Limited Warranty

¹ **DOWNLOAD THE TEELIO APP**




Catalog Number:	Project Name:	Note:	Date:	Type:
-----------------	---------------	-------	-------	-------

LUMEN PACKAGES

(Delivered lumens are based on the actual IES results)

CATALOG NUMBER	WATTAGE	CCT	DELIVERED LUMENS	EFFICACY (LM/W)
PT-WAA-4F10I-40-5C4P-2	21W	3000K	3,294	159
	21W	3500K	3,288	160
	21W	4000K	3,300	161
	21W	5000K	3,289	160
	21W	6500K	3,282	158
	26W	3000K	4,054	157
	26W	3500K	4,057	159
	26W	4000K	4,075	161
	26W	5000K	4,060	159
	26W	6500K	4,044	156
	34W	3000K	5,101	155
	34W	3500K	5,127	157
	34W	4000K	5,160	159
	34W	5000K	5,132	157
	34W	6500K	5,091	154
	40W	3000K	6,120	149
	40W	3500K	6,239	154
	40W	4000K	6,296	158
	40W	5000K	6,253	155
	40W	6500K	6,170	150

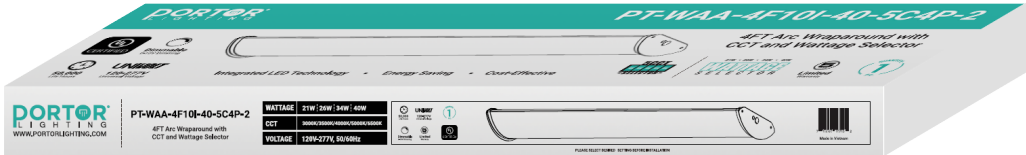

WHAT'S IN THE BOX?
• Fixture
• Installation sheet

4FT
QTY/CARTON
1
PIECE