

Catalog Number:	Project Name:	Note:	Date:	Type:
-----------------	---------------	-------	-------	-------

Portor's Slim Wraparound series is designed to save energy and meet lost light regress requirements. Our Modern wraparound is wattage adjustable (29W/33W/40W) and color tunable (35K/40K/50K).

Ideal use for offices, hallways, stairwells, bathrooms and conference rooms.



CONSTRUCTION

Modern design wraparound with durable and solid form factor frame. Made out of quality aluminum alloy body with white finish.

OPTICS

Luminaire is built with the highest quality driver that is Universal Voltage (120V-277V), uses long lasting, high-efficient LED package. Frosted lens diffuser reduces glare and improves overall light output.

ELECTRICAL

High performance light output perfect for high ceiling. Optic lens designed to reduce glare and improve light distribution through precision lens optics.

MOUNTING

Comes standard with J-Hooks, a 0.5" screw in hole for pendant mount, and a safety cable. Options available for U-bracket mount.

CONTROLS

Options available for occupancy sensors with daylight harvesting fuction, TEELIO Bluetooth lighting controls, and Lutron AWN.

LISTING

UL Listed, DLC Premium Listed

LIFESPAN


L70 Rated for 50,000 hours

TECHNICAL SPECIFICATION

CCT	3500K/4000K/5000K
CRI	80+
DIMMING	1-10V dimming
VOLTAGE	120V - 277V
POWER FREQUENCY	50/60 Hz
CURRENT	1.5A
POWER FACTOR	>0.9
THD	≤10%
WORKING TEMPERATURE	-4°F ~ +104°F
IP RATING	Dry Location
WARRANTY	5 year limited (Standard)



DIMENSION

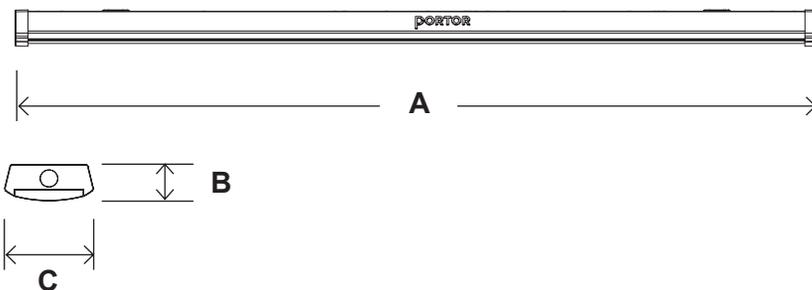

CATALOG NO.	PT-LS1-2FT-3CP
A	47.64"
B	2.13"
C	5.31"
Net Weight	3.98 lbs

Catalog Number:	Project Name:	Note:	Date:	Type:
-----------------	---------------	-------	-------	-------

ORDERING SAMPLE: **PT-WAS-4F5I-40-3CP-2**

PT-WAS	-	4F5I	-	40	-	3CP	-	2	-		-		
Fixture										Controls/Sensors		Adds-On	
Series	Size	Max Wattage	CCT	Series	TEELIO ¹		EM Battery						
PT-WAS	4FT (4-Footer)	40W (29W/33W/40W)	3CP (3500K/4000K/5000K)	2	__ Blank  PT-MS-BT Bluetooth 4pin Sensor		__ Blank  PT-EMN-08W-050 (4FT) 8W AC Emergency Battery Pack						
					ANALOG								
					 PT-MS-4P-PR 4 PIN PIR Analog Sensor w/ Daylight Harvesting								
					 MSK-LV-RC Remote for PT-MS-4P-PR								

Mounting	Other Option
Surface Mount Kit __ Blank  SM Surface Mount (Standard) Comes with junction cover	Warranty __ Blank (5 Year Standard) 7YR 7 Year Limited Warranty 10YR 10 Year Limited Warranty

¹ **DOWNLOAD THE TEELIO APP**



Catalog Number:	Project Name:	Note:	Date:	Type:
-----------------	---------------	-------	-------	-------

LUMEN PACKAGES

(Delivered lumens are based on the actual IES results)

CATALOG NUMBER	WATTAGE	CCT	DELIVERED LUMENS	EFFICACY (LM/W)
PT-WAS-4F5I-40-3CP-2	29W	3500K	3,630	129
	29W	4000K	3,765	137
	29W	5000K	3,823	136
	33W	3500K	4,174	127
	33W	4000K	4,341	136
	33W	5000K	4,383	134
	40W	3500K	4,944	124
	40W	4000K	5,178	134
	40W	5000K	5,195	130



WHAT'S IN THE BOX?
 • Fixture
 • Installation sheet

**4FT
QTY/CARTON**

6
PIECES