

Catalog Number:	Project Name:	Note:	Date:	Type:
-----------------	---------------	-------	-------	-------

Designed for durability and versatility, the IP65 Rated The PT-WPA Architectural Series Wall Pack is ideal for wet locations such as processing workshops, storage warehouses, steel mills, toll booths, waiting rooms, and railway station platforms.

This robust wall pack ensures reliable performance and superior illumination in challenging environments.



WITH INTEGRATED PHOTOCELL

CONSTRUCTION

Made from die-cast aluminum, offering excellent heat dissipation and long-lasting quality. The IP65 rating ensures protection against water and dust, making it perfect for outdoor and industrial settings.

PHOTOCELL

Internal photocell design which can automatically turn on at dusk and turn off at dawn for up to 70% of energy saving.

OPTICAL SYSTEM

PC lens designed to reduce glare and improve over-all light distribution through precision formed LED optics.

ELECTRICAL

Luminaire is built with the highest quality driver that is universal voltage (120-277V), uses highly-efficient LED packages to ensure cool temperatures for long lasting life span.

LISTING

UL Listed, DLC Premium Listed, IP65 Rated, RoHS

LIFESPAN


L70 > 50,000 hours

TECHNICAL SPECIFICATION


CCT	3000K/4000K/5000K
CRI	80+
DIMMING	0-10V dimming
SENSOR	Integrated photocell
VOLTAGE	120V-277V
POWER FREQUENCY	50/60 Hz
POWER FACTOR	>0.9
WORKING TEMPERATURE	-40°F ~ 104°F
IP RATING	IP65 Wet Location
WARRANTY	5 year limited (Standard)



DIMENSION

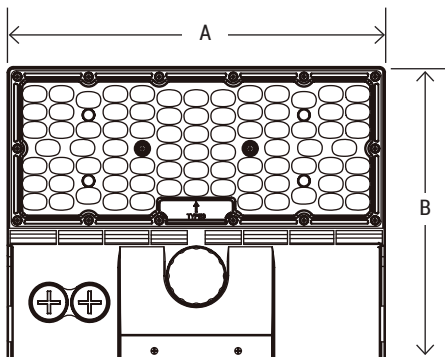

Bottom View

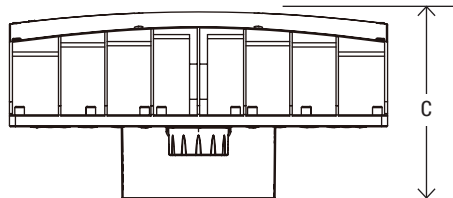



Front View

DIMENSION	PT-WPA Series
A	12.4"
B	9.7"
C	6.14"
Net Weight	6 lbs
Gross Weight	8 lbs

Catalog Number:	Project Name:	Note:	Date:	Type:
-----------------	---------------	-------	-------	-------

ORDERING SAMPLE: PT-WPA-HW-3CP-PT-EMA-8W

PT-WPR	-		-	3CP	-	
Fixture						Add-On³
Series		Size		CCT/Wattage		EM Battery
PT-WPA		MW (up to 60W)		3CP (36W/48W/60W) (30K/40K/50K)		__ Blank  PT-EMA-8W (MW) 8W EM Battery Pack (Remote installation)
		HW (up to 100W)		3CP (60W/80W/100W) (30K/40K/50K)		PT-EMA-25W (HW) 25W EM Battery Pack (Remote installation)
Photocell	-	Mounting	-	Fixture Add-on³	-	Other Option
Integrated Photocell		Wall Mount		Transformer ²		Warranty
__ Blank		__ Blank		__ Blank  PT-SDT-325 325 VA Step down Transformer (Remote installation)		__ Blank (5 year standard) 7YR 7-year Limited Warranty 10YR 10-year Limited Warranty

² TRANSFORMER


PT-SDT-325 is a step-down auto-transformer designed to convert high voltage, low current power into low voltage, high current power. It has a maximum power rating of 325VA, which makes it suitable for use in a variety of applications, such as electrical power transmission, distribution, and electronic devices. Remote installation.


³ SOLD SEPARATELY

Catalog Number:	Project Name:	Note:	Date:	Type:
-----------------	---------------	-------	-------	-------

LUMEN PACKAGES

(Delivered lumens are based on the actual IES results)

CATALOG NUMBER	WATTAGE	CCT	DELIVERED LUMENS	EFFICACY (LM/W)	DLC ID
 PT-WPA-MW-3CP	36W	3000K	5,538	157	S-9YVVP1
		4000K	5,824	169	
		5000K	5,801	163	
	48W	3000K	7,251	152	
		4000K	7,732	167	
		5000K	7,544	157	
	60W	3000K	8,701	146	
		4000K	9,322	162	
		5000K	9,206	157	

CATALOG NUMBER	WATTAGE	CCT	DELIVERED LUMENS	EFFICACY (LM/W)	DLC ID
 PT-WPA-HW-3CP	60W	3000K	9,297	156	S-471F21
		4000K	9,785	169	
		5000K	9,584	163	
	80W	3000K	12,170	149	
		4000K	12,771	166	
		5000K	12,402	157	
	100W	3000K	14,305	142	
		4000K	15,528	161	
		5000K	15,178	150	



WHAT'S IN THE BOX?

- Fixture
- Installation sheet

QTY/CARTON

1
PIECES